

131 76.1

# EXPERIMENTAL RESEARCHES

ON

## THE FLOW OF STEAM THROUGH NOZZLES AND ORIFICES

■ TO WHICH IS ADDED A NOTE ON

## THE FLOW OF HOT WATER

BY

A. RATEAU

*Engineer of the Mining Corps*

*Professeur à l'Ecole Supérieure des Mines de Paris*

*AUTHORIZED TRANSLATION*

BY

H. BOYD BRYDON

LONDON

ARCHIBALD CONSTABLE & CO LTD

1905

# CONTENTS.

---

## I.

|                                                                                                                                                             | PAGE |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| Outline of the Theory of Steam Flow. Velocity of Discharge.<br>Weight of Discharge. Profile of Nozzle for Steam. Prac-<br>tical Formula for Discharge. .... | 1    |

## II.

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |    |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| Experiments. Direct Method of Previous Experimenters. In-<br>direct Method of the Author. Estimation of the Precision<br>of the Measurements. Arrangement of Apparatus. Re-<br>marks on Temperature and Pressure Measurements. Cali-<br>bration of the Water-discharge Nozzle. General Discus-<br>sion of the Results. Results of the Experiments with the<br>Convergent Nozzle. Results Compared with those of Pre-<br>vious Experimenters. Experiments with $p$ greater than<br>$0.58P$ . Experiments with Orifice in Thin Plate . . . . . | 15 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|

## III.

|                                                                                                                           |    |
|---------------------------------------------------------------------------------------------------------------------------|----|
| Comparison of Results with Hirn's Experiments on Air. Analy-<br>sis of Hirn's Results. Discussion of the Curves . . . . . | 43 |
| Tabulated Results of the Experiments . . . . .                                                                            | 47 |

## IV.

|                                                                                   |    |
|-----------------------------------------------------------------------------------|----|
| Discussion of the Phenomena of the Flow of Hot Water through<br>Nozzles . . . . . | 57 |
|-----------------------------------------------------------------------------------|----|

## APPENDIX.

|                                                             |    |
|-------------------------------------------------------------|----|
| Bibliography of the Flow of Steam through Nozzles . . . . . | 75 |
|-------------------------------------------------------------|----|

131 76.1

# EXPERIMENTAL RESEARCHES

ON

## THE FLOW OF STEAM THROUGH NOZZLES AND ORIFICES

■ TO WHICH IS ADDED A NOTE ON

## THE FLOW OF HOT WATER

BY

A. RATEAU

*Engineer of the Mining Corps*

*Professeur à l'Ecole Supérieure des Mines de Paris*

*AUTHORIZED TRANSLATION*

BY

H. BOYD BRYDON

LONDON

ARCHIBALD CONSTABLE & CO LTD

1905



## PREFACE.

---

IN the steam-turbine we are confronted with an entirely new series of phenomena. The knowledge of steam accumulated by familiarity with the reciprocating engine is of little use in designing this newest yet oldest of prime movers. Nor can the cut-and-try methods that have brought the reciprocating engine to its present and, it may almost be said, its final stage of excellence be employed in the steam-turbine. Modern commercial conditions are such that design must be based on ascertained physical laws.

The development of the steam-turbine within the last few years has been remarkable. It has reached a position not only of equality with the best modern engines, but its high efficiency, its lower first cost, smaller size, and ease of operation have placed it in the very forefront of steam-engineering practice.

This rapid advance has necessitated the re-investigation of steam from the point of view of velocity instead of pressure, of kinetic energy instead of potential, of the friction of rapidly moving bodies against a vapor instead of a lubricated surface, of the balancing of

parts so that they shall revolve about their centre of gravity, and of numerous other questions which are but beginning to make themselves felt. The available data are few, and practically all the information is scattered widely through the pages of French or German scientific periodicals.

Of all these, the fundamental problem is the proportioning of the nozzles or passages which shall permit the steam to transform its pressure into vis viva. While there exists considerable information on this subject throughout the scientific press, very little is reliable or in such shape as to be of practical value. The experiments undertaken by Prof. Rateau on this most important feature of steam-turbine design were made when he was beginning his study of the steam-turbine and evidence a care and precision of scientific research coupled with a keen appreciation of the practical that give a report of his results a value to the designer too often wanting in the ordinary laboratory investigation.

In the hope that these results may be of some service to those who have neither the time nor the inclination to study them in the original, this translation has been made.

H. B. B.

CHICAGO, September 1904.

# CONTENTS.

---

## I.

|                                                                                                                                                     | PAGE |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|------|
| Outline of the Theory of Steam Flow. Velocity of Discharge. Weight of Discharge. Profile of Nozzle for Steam. Practical Formula for Discharge. .... | 1    |

## II.

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| Experiments. Direct Method of Previous Experimenters. Indirect Method of the Author. Estimation of the Precision of the Measurements. Arrangement of Apparatus. Remarks on Temperature and Pressure Measurements. Calibration of the Water-discharge Nozzle. General Discussion of the Results. Results of the Experiments with the Convergent Nozzle. Results Compared with those of Previous Experimenters. Experiments with $p$ greater than $0.58P$ . Experiments with Orifice in Thin Plate ..... | 15 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|

## III.

|                                                                                                                  |    |
|------------------------------------------------------------------------------------------------------------------|----|
| Comparison of Results with Hirn's Experiments on Air. Analysis of Hirn's Results. Discussion of the Curves ..... | 43 |
| Tabulated Results of the Experiments .....                                                                       | 47 |

## IV.

|                                                                            |    |
|----------------------------------------------------------------------------|----|
| Discussion of the Phenomena of the Flow of Hot Water through Nozzles ..... | 57 |
|----------------------------------------------------------------------------|----|

## APPENDIX.

|                                                         |    |
|---------------------------------------------------------|----|
| Bibliography of the Flow of Steam through Nozzles ..... | 75 |
|---------------------------------------------------------|----|

# EXPERIMENTAL RESEARCHES

## ON

### THE FLOW OF STEAM THROUGH CONVERGENT NOZZLES AND ORIFICES IN THIN PLATES.

---

I. The operation of steam turbines depends upon the flow of steam at a high velocity. In order to be able to calculate these machines rationally it is necessary to have a complete knowledge of the phenomenon of the flow of steam. As only brief, incomplete and sometimes erroneous ideas are found in the works on mechanics and thermodynamics, I undertook extended and precise experimental researches in order to verify the thermodynamic principles involved.

The results of these researches, made in 1895-96, are here published. We shall see that the theoretical formulæ, correctly interpreted, are exactly confirmed, and also that the experimental results allow of determining very closely the mechanical equivalent of the heat unit.

Before describing the method employed, I will outline the theory of the phenomenon.

**2. Theory.**—The flow of elastic fluids through nozzles differs considerably from the flow of liquids as soon as the ratio of the pressure in the exhaust to the initial pressure  $\frac{p}{P}$  becomes appreciably less than unity.

If at any point in a nozzle

$S$  be the area of the nozzle,

$V$  the velocity of the fluid,

$Q$  the volume of discharge,

$W$  the weight discharged,

$D$  the mean density of the fluid in the state in which it exists, i.e., homogeneous or heterogeneous, while passing the section  $S$ , then the volume of the discharge  $Q$  is at once given by  $Q = VS$ , and the weight of the discharge is equal to  $DQ$  and is related to the section  $S$  and the velocity  $V$  by the following formula:

$$W = DVS. \quad . \quad . \quad . \quad . \quad . \quad (1)$$

If  $D$  is constant, as in the case of liquids, the section  $S$  is inversely proportional to the velocity  $V$ , and consequently  $V$  always increases as  $S$  decreases, but this is no longer true in the case of elastic fluids. As the pressure falls the density decreases proportionally, while the velocity increases in such a manner that the product  $DV$  first increases, reaches a maximum, and then decreases. In the case of gases the maximum occurs for a ratio of the pressures equal to 0.52,

and for steam when the ratio is in the neighborhood of 0.58 whatever the initial pressure may be.<sup>1</sup> The calculation of this maximum will be given later. It follows that when the exhaust pressure is lower than  $0.58P$  the discharge nozzle, at first convergent, should then diverge, if it is desired that the steam shall continue to expand so as to reach the speed corresponding to the fall of pressure from  $P$  to  $p$ ; and the ratio of the final section of the nozzle  $S_1$  to the section at the throat  $S$  should vary with the ratio of the pressures. At the throat the pressure is always equal to  $0.58P$ , and the velocity, which depends on  $P$  only, is the same as sound would have in the fluid in the state in which it exists at that point of the nozzle, as has been shown by Hugoniot (*Comptes Rendus de l'Académie des Sciences*, vol. 103).

With a given nozzle, if the pressure  $p$  into which the steam is discharged is lower than the value  $p_1$  corresponding to the ratio  $\frac{S_1}{S}$  of the sections of the mouth and the throat of the nozzle, the pressure of the steam at the mouth of the nozzle will not be  $p$ , but  $p_1$ , which is in a fixed ratio to the initial pressure  $P$ . At the moment of leaving the nozzle, the steam entering suddenly into a space where the pressure is lower than in the mouth of the nozzle immediately expands

---

<sup>1</sup> The value of this ratio which makes  $DV$  a maximum appears, however, to depend a little on the value of  $P$  in the case of steam.

and the jet takes a paraboloid form. The enlargement of the jet ceases when the back pressure reaches the value  $p_1$ .

The discharge is independent of the back pressure when that is less than  $0.58P$ . On the contrary, when  $p$  is larger than  $0.58P$  the discharge depends both on  $P$  and  $p$ . It is necessary to distinguish two very different cases, therefore in the first the calculation of the discharge depends only on  $P$  and the formula is simple; in the second it depends both on  $P$  and on  $p$ .

For both cases, however, it is the most contracted section of the nozzle (the throat if it is convergent-divergent, or the mouth if it is simply convergent), which enters into the calculation of the discharge.

The above is only applicable, strictly speaking, to nozzles properly so called. In the case of orifices in thin plates the coefficient of contraction  $K$ , which varies with the ratio  $\frac{p}{P}$  of the pressures, complicates the phenomenon. We shall see later on the experimental values that were obtained for this coefficient.

**3. Equation of Velocity.**—The velocity  $V$  of the steam can be calculated by two different methods, either by the ordinary mechanical method having given the relations between the specific volume  $s$  and the pressure  $p$ , or by thermodynamics having given the thermal constants of the steam, which can be obtained from Regnault's steam tables.

The first method results in the general formula usu-

ally credited to Weisbach, but already pointed out by Wantzel and Saint Venant in 1839,

$$\frac{V^2}{2g} = \int_p^P v \cdot dp, \quad \cdot \quad \cdot \quad \cdot \quad \cdot \quad \cdot \quad \cdot \quad (2)$$

which can be integrated when the relation between  $v$  and  $p$  is known.

It is always assumed that in the flow of steam through nozzles the expansion is adiabatic because the steam remains so short a time in the nozzle, some 0.0001 of a second, that it cannot give up or receive an appreciable quantity of heat. Now in the case of adiabatic expansion of initially saturated steam Zeuner has shown<sup>1</sup> that within large limits of pressure we have approximately

$$pv = \text{constant}, \quad \cdot \quad \cdot \quad \cdot \quad \cdot \quad \cdot \quad (3)$$

as in the case of gases, but with  $\gamma = 1.035$  instead of 1.41. Putting the value of  $v$  calculated by this equation in the preceding equation,  $V$  is obtained as a function of  $P$  and  $p$ . Then from Zeuner's empirical formula  $D = 0.587P^{0.94}$ , which gives the density of steam as a function of its pressure, we have the following formula for the discharge when  $P = 0.58P$ :

$$W = 15.26P^{0.97}, \quad \cdot \quad \cdot \quad \cdot \quad \cdot \quad \cdot \quad (4)$$

---

<sup>1</sup> Mechanical Theory of Heat.

$W$  being the weight of steam discharged in grammes per second per square centimetre of orifice.<sup>1</sup>

This formula was given by Dr. Grashof (*Theoretische Maschinenlehre*, Vol. I, III).

By the second method, developed by Zeuner, the kinetic energy  $\frac{V^2}{2g}$  of unit weight of the fluid should be equal to the energy represented by the entropy diagram when the expansion is adiabatic from  $P$  to  $p$ .

Putting  $T_0$  the temperature of saturated steam corresponding to  $P$ ,  $T_1$  that corresponding to  $p$ , in the entropy diagram (Fig. 1), with entropy  $\phi$  as abscissæ and absolute temperature  $T$  as ordinates,  $AE$  and  $DF$  are the isothermals at the temperatures  $T_0$  and  $T_1$ .  $AD$  is the curve of entropy for water, and  $EF$  that for saturated steam. Let  $B$  be the point corresponding to the state of the steam as it enters the nozzle. Now the relative weights of liquid and vapor in the mixture represented by the point  $B$  are proportional to the lengths  $BE$  and  $BA$ . (We are here supposing for the sake of greater generality that the fluid is not initially in the state of saturated steam.)  $BC$  is the line representing the expansion of steam in the nozzle. If the expansion is adiabatic,  $BC$  is a

<sup>1</sup> In English units this formula becomes

$$W = 0.0165 P^{0.97},$$

where  $W$  = pounds discharged per square inch of orifice per second and  $P$  = absolute pressure in pounds per square inch.

—TRANS.

straight line parallel to the axis of temperatures. The total mechanical energy developed by the fluid during its complete expansion from the pressure  $P$  to the pressure  $p$  is represented on the diagram by the area of the trapezium  $ABCD$ . This area is given by

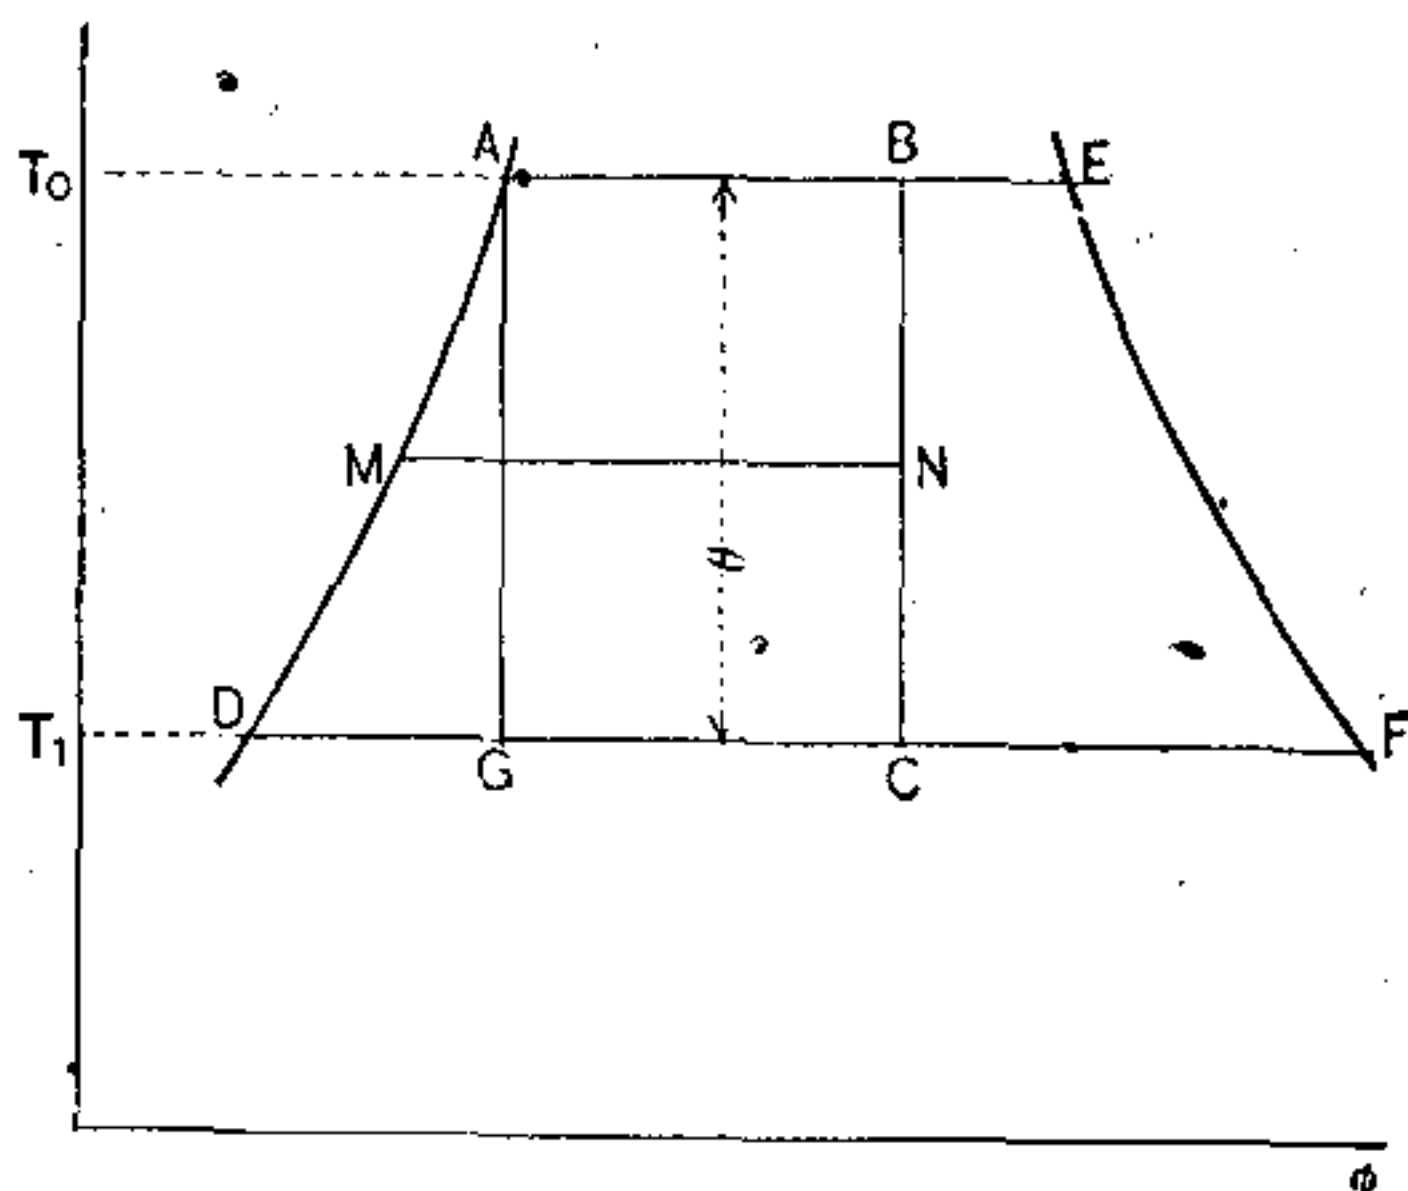


FIG. 1.

the simple expression  $\theta L$ , in which  $\theta$  is its height (that is to say, the fall of temperature from  $T_0$  to  $T_1$ ) and  $L$  its mean length  $MN$ .

When the fall of temperature is small this mean length  $L$  can be taken in practice equal to the mean of the two bases  $AB$  and  $CD$ ; but if the exact formula is required, the trapezium must be divided into the rectangle  $ABCG$ , equal to  $\theta AB$ , and the triangle with curvilinear hypotenuse  $AGD$ . If the steam is initially

saturated,  $AB$  is equal to  $\frac{r}{T_0}$ ,  $r$  being the heat of vaporization of the water at the temperature  $T_0$ .

Introducing  $E$ , the mechanical equivalent of heat, the formula for the velocity becomes

$$V^2 = 2gE\theta L, \quad . \quad . \quad . \quad . \quad . \quad (5)$$

and if the steam is initially saturated, we may write

$$V^2 = 2gE\left(\frac{r}{T_0} + \frac{C\theta}{2T}\right), \quad . \quad . \quad . \quad . \quad (6)$$

$C$  being the specific heat of the liquid and  $T$  being nearly the arithmetic mean  $\frac{T_0 + T_1}{2}$  of the extreme temperatures.

This is the simplest form of the equation by which the velocity of the flow of steam can be calculated. It supposes a knowledge first of the temperatures corresponding to the pressures; second, the heat of vaporization of the liquid; third, the specific heat of the liquid. These values are given for water by Regnault's tables with an approximation more than sufficient in practice.

**4. Calculation of the Weight of Discharge.**—In order to calculate the weight of discharge, the velocity of flow, the density of the steam at the section of the nozzle under consideration, and the quantity of liquid formed during the adiabatic expansion must be ascertained. This liquid is entrained in the steam and probably makes with it a homogeneous mixture.

The density can be obtained from Regnault's tables by means of Clapeyron's formula. It has already been

calculated and is generally found in a supplementary column added to Regnault's tables.

The quantity of liquid formed can be calculated from the entropy diagram, or can be taken from a chart, as I have shown in my *Rapport sur les Turbines à Vapeur*.<sup>1</sup> The proportion of water thus obtained is  $1-x$ , where  $x$  is the quality of the steam.

Neglecting the specific volume of the liquid compared with that of the steam (which is many hundred times larger), we have for the weight of discharge

$$W = \frac{DSV}{x}.$$

Conversely, being given a weight  $W$  of steam discharged by a nozzle, we can calculate by this formula the area necessary when the pressure has any given value  $p$ . An example of this calculation will be given later.

In the first place, however, it should be noted that the two methods employed in calculating the velocity and weight of discharge while differing in form are really identical, because it was from Regnault's tables that Zeuner deduced his empirical formula connecting the pressure and specific volume of a mixture of steam and water during an adiabatic expansion, so that both methods are based finally upon Regnault's tables; that is to say, on the experimental data of thermodynamics.

---

<sup>1</sup> Memoir presented to the Congrès International de Mécanique, 1900. *Rev. de Mécanique*, August 1900.

**5. Profile of Nozzles for Steam.** — In the following table is given the calculation of the velocity of flow of initially saturated steam from an initial pressure  $P = 10$  kilogrammes per square centimetre.

The first column of this table gives the pressure  $p$  at which the speed is to be calculated.

The second column gives the fall of temperature  $\theta$ ; that is to say, the difference of the temperatures corresponding to the pressures  $P$  and  $p$ .

The third column gives the value of  $L$ ; that is to say,

$$\frac{r}{T} - \frac{\theta}{2T'}, \quad \text{where} \quad T' = T - \frac{\theta}{2}.$$

The fourth column gives the velocity of flow  $V$  in metres per second calculated from the preceding formula (6).

In the fifth column the density corresponding to the pressure  $p$  is given.

The sixth column contains the product  $DV$ .

In the seventh column is given the proportion of steam remaining when the mixture has expanded adiabatically to the pressure  $p$ . The fraction  $x$  is calculated by means of the entropy diagram or by Zeuner's formula

$$\frac{r_1 x_1}{T_1} = \frac{r_0 x_0}{T_0} - C \log \frac{T_1}{T_0}.$$

In the eighth column the quotient  $x$  by  $DV$  is written, or rather, to avoid a number of zeros, 1000 times this quotient,

$$1000 \frac{x}{DV}.$$

# Calculation of the Velocities and Theoretical Areas for the Flow of Saturated Steam.

Initial pressure 10 kg. per sq. cm.

$R$  is the ratio of the radius of the area of flow corresponding to the pressure indicated in the first column, to the radius of the area at the throat of the nozzle.

| $\frac{p}{\text{kg/cm}^2}$<br>1 | $\theta$<br>2 | $\frac{r}{T} + \frac{\theta}{2T - \theta}$<br>3 | $\frac{V}{\text{m/sec}}$<br>4 | $D$<br>5 | $DV$<br>6 | $x$<br>7 | $\bullet \frac{1.000 x}{DV}$<br>8 | $R$<br>9 |
|---------------------------------|---------------|-------------------------------------------------|-------------------------------|----------|-----------|----------|-----------------------------------|----------|
| 10                              |               |                                                 |                               |          |           |          |                                   |          |
| 9                               | 4.521         | 1.0673                                          | 200.554                       | 4.6160   | 925.757   | 0.9933   | 1.0730                            | 1.2358   |
| 8                               | 9.427         | 1.0728                                          | 290.347                       | 4.1331   | 1200.032  | 0.9858   | 0.8215                            | 1.0813   |
| 7                               | 14.862        | 1.0791                                          | 365.629                       | 3.6467   | 1333.338  | 0.9767   | 0.7325                            | 1.0210   |
| 6                               | 20.943        | 1.0860                                          | 435.417                       | 3.1558   | 1374.012  | 0.9673   | 0.7041                            | 1.0009   |
| 5.9                             | 21.596        | 1.0868                                          | 442.330                       | 3.1065   | 1374.100  | 0.9661   | 0.7031                            | 1.00024  |
| 5.8                             | 22.258        | 1.0875                                          | 449.188                       | 3.0570   | 1373.169  | 0.9650   | 0.70276                           | 1        |
| 5.75                            | 22.594        | 1.0879                                          | 452.650                       | 3.0322   | 1372.523  | 0.9646   | 0.70279                           | 1.00007  |
| 5.7                             | 22.929        | 1.0883                                          | 456.076                       | 3.0075   | 1371.650  | 0.9642   | 0.70295                           | 1.00015  |
| 5.6                             | 23.610        | 1.0892                                          | 462.991                       | 2.9580   | 1369.528  | 0.9632   | 0.70331                           | 1.00042  |
| 5.4                             | 24.999        | 1.0908                                          | 476.765                       | 2.8589   | 1363.024  | 0.9607   | 0.70483                           | 1.0015   |
| 5                               | 27.899        | 1.0942                                          | 504.445                       | 2.6596   | 1341.620  | 0.9562   | 0.71272                           | 1.0071   |
| 4                               | 36.078        | 1.1038                                          | 576.152                       | 2.1572   | 1242.875  | 0.9432   | 0.75885                           | 1.0392   |
| 3                               | 46.088        | 1.1159                                          | 654.753                       | 1.6466   | 1078.116  | 0.9279   | 0.86067                           | 1.1066   |
| 2                               | 59.326        | 1.1328                                          | 748.580                       | 1.1250   | 842.150   | 0.9068   | 1.0768                            | 1.2378   |
| 1                               | 79.808        | 1.1591                                          | 878.121                       | 0.5860   | 514.579   | 0.8755   | 1.7016                            | 1.5503   |
| 0.8                             | 85.884        | 1.1673                                          | 914.152                       | 0.4749   | 434.131   | 0.8654   | 1.9934                            | 1.6842   |
| 0.6                             | 93.404        | 1.1775                                          | 957.490                       | 0.3621   | 346.707   | 0.8535   | 2.4617                            | 1.8718   |
| 0.4                             | 103.425       | 1.1914                                          | 1013.470                      | 0.2470   | 250.328   | 0.8374   | 3.3452                            | 2.1820   |
| 0.3                             | 110.148       | 1.2011                                          | 1050.140                      | 0.1882   | 197.637   | 0.8259   | 4.1789                            | 2.4386   |

The sections of a nozzle required to discharge a predetermined weight of steam will be proportional to this quantity. To obtain the absolute values, the actual discharge of steam must be known.

Examining the numbers in this column it will be noted that the areas decrease until  $p$  is equal to  $0.58P$ , and then increase indefinitely. In order to determine as exactly as possible the position of this minimum, we have made the intervals of pressure  $p$  in the neighborhood of the value  $0.58P$  much smaller. By tracing the curve of the quantity  $1000 \frac{x}{DV}$  as a function of the pressure  $p$ , the position and the value of this minimum are determined with an approximation as close as is permitted by Regnault's tables.

I have made this calculation for the discharge from a number of initial pressures, and can state that the position of the minimum varies slightly with the pressure  $P$  around the value  $0.58P$ .

Taking the square root of the quantity  $1000 \frac{x}{DV}$  and forming the ratio of this square root to its smallest value, we obtain a quantity which we may call  $R$ , which will be proportional to the diameters or radii of a nozzle of circular cross-section of proper shape to discharge the steam. The values of  $R$  are written in the last column of the table. Plotting as abscissæ either  $p$  or some function of  $p$ , for example  $\log p$ , and as ordinates the value of  $R$ , we can represent the longitudinal profile of nozzles for the flow of steam. Fig. 2 gives this

curve by which the nozzles of steam turbines can be calculated rapidly for each particular case.

This curve is utilized in the following manner. Having the initial pressure  $P$  and the final pressure  $p$  to which the steam is required to expand, we take from

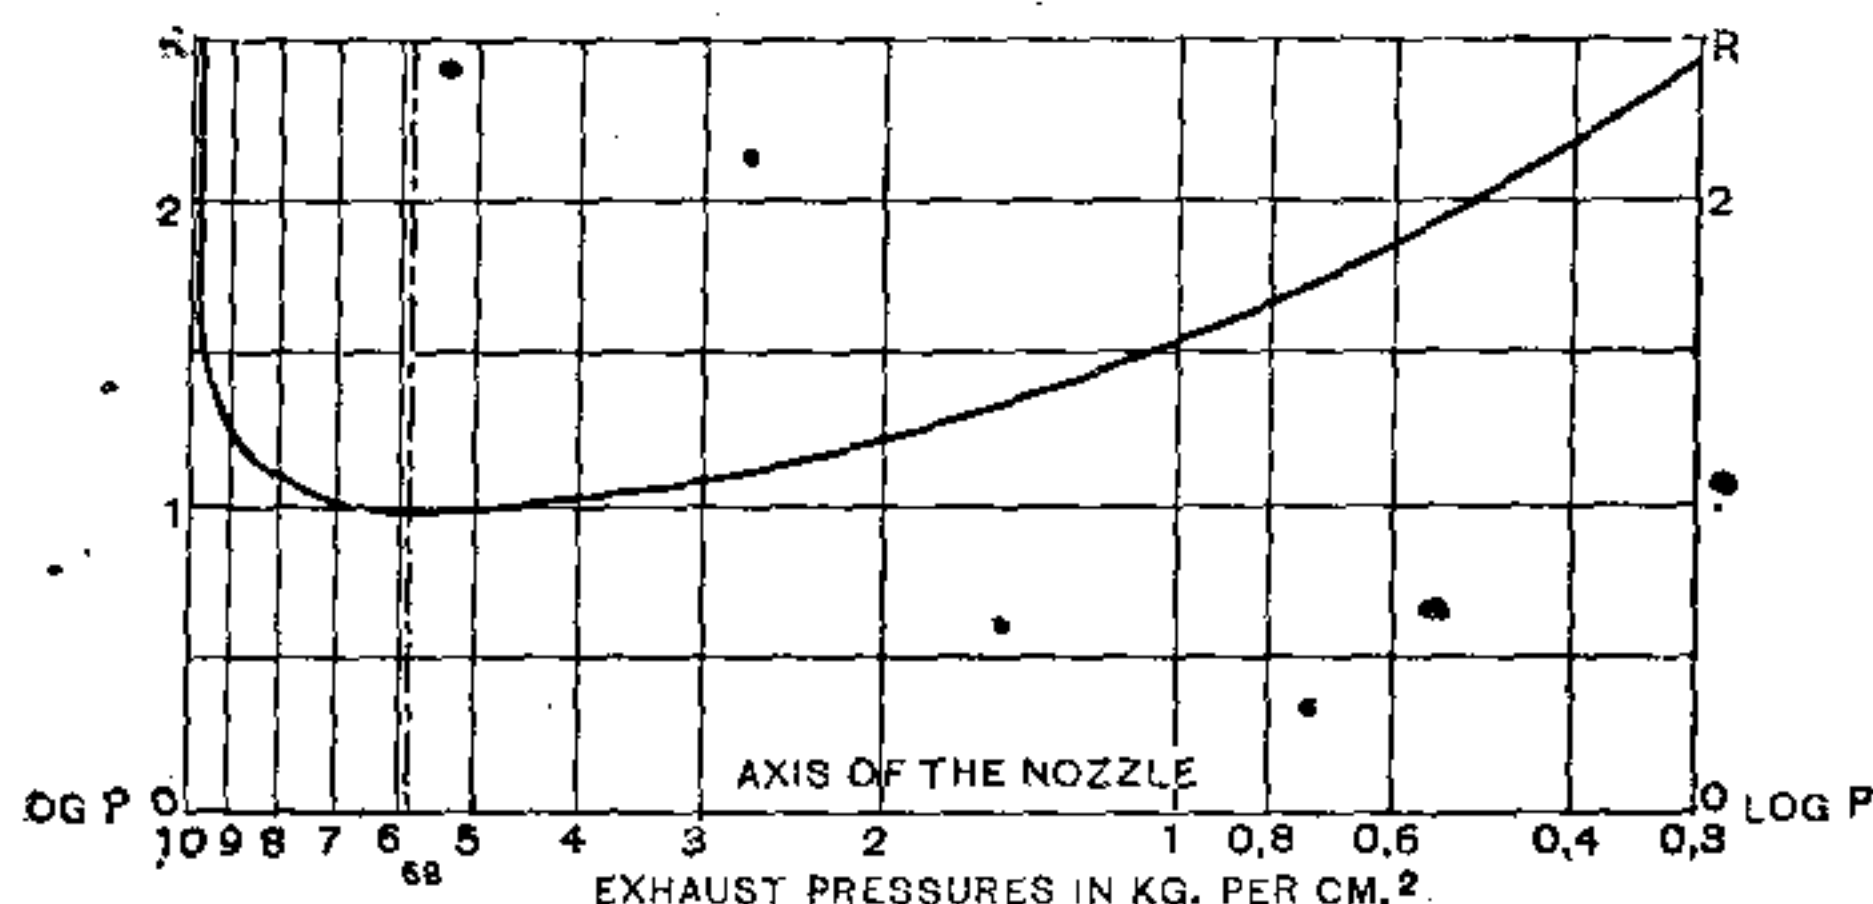


FIG. 2.

the curve the ordinate corresponding to the abscissa indicated by the value of the ratio  $\frac{p}{P}$ . This ordinate is then the radius of the final section of the nozzle, the section at the throat having the minimum ordinate of the curve as its radius.

It is true the curve will be slightly different for different initial pressures, but for the needs of practice the variation can be neglected.

**6. Practical Formula for Discharge.**—When the nozzle is convergent and the final pressure  $p$  is less than  $0.58P$  the discharge depends only on  $P$ , because then the pressure  $p$  at the mouth of the nozzle is always equal to  $0.58P$ . Calculating the discharge  $W$  per unit area of

the mouth of the nozzle, or calculating the ratio  $\frac{W}{P}$ , which varies little, we find results such as are indicated in the following table.

*Table of the Theoretical Values of  $\frac{W}{P}$ .*

| $P$                | $p$                | $\theta$ | $\frac{r}{T} + \frac{\theta}{2T - \theta}$ | $V$    | $D$               | $x$    | $\frac{DV}{10x}$ | $\frac{W}{P}$ |
|--------------------|--------------------|----------|--------------------------------------------|--------|-------------------|--------|------------------|---------------|
| kg/cm <sup>2</sup> | kg/cm <sup>2</sup> | degrees  |                                            | m/sec  | kg/m <sup>3</sup> |        |                  |               |
| 10                 | 5.8                | 22.258   | 1.0875                                     | 449.19 | 3.0570            | 0.9650 | 142.30           | 14.23         |
| 5                  | 2.9                | 19.337   | 1.2028                                     | 439.85 | 1.5950            | 0.9650 | 72.70            | 14.54         |
| 2                  | 1.16               | 16.310   | 1.3530                                     | 428.42 | 0.6738            | 0.9670 | 29.85            | 14.92         |
| 1                  | 0.58               | 14.459   | 1.4639                                     | 420.04 | 0.3507            | 0.9697 | 15.19            | 15.19         |

The theoretical formula  $\frac{W}{P} = 15.20 - 0.96 \log P$  gives the same figures as in the last volume to within about unity in the last order

In order to ascertain the relation between the value of this ratio and the pressure we may plot as abscissæ, not lengths proportional to  $P$ , but lengths proportional to  $\log P$ , and as ordinates the values of the ratio  $\frac{W}{P}$  obtained from Regnault's tables. The points thus obtained range themselves almost exactly on a straight line from the value  $P=1$  kilogramme per centimetre to  $P=13$  kilogrammes per square centimetre. The digressions do not exceed one-tenth of one per cent, as will be seen by the curve on Plate II, where the points calculated from theory are marked by dots surrounded by circles. We can then write the following very simple empirical formula:

$$\frac{W}{P} = a - b \log P. \quad . \quad . \quad . \quad . \quad (7)$$

$a$  and  $b$  being two constants for which the best values are  $a=15.20$  and  $b=0.96$ , the discharge being given as before in grammes per second per square centimetre of the mouth of the nozzle.

This formula can also be replaced by the following, to which it is practically equivalent in practice ( $\frac{b}{a}$  being small):

$$W = aP' - \frac{b}{a} \log e, \quad (8)$$

$e$  being the base of the natural logs, or in figures

$$W = 15.20P^{0.9725}. \quad (9)$$

This is the form in which the formula is given by Grashof. (Grashof's formula is  $W = 15.26P^{0.9725}$  when the coefficient of discharge is equal to unity.<sup>1</sup>)

In practice the first form is the most convenient and is the one I have recommended.

We will see that our experiments lead to slightly increasing the coefficient 15.20 and bring it to exactly the value 15.26 adopted by Grashof.

## EXPERIMENTS.

**7. Previous Experiments.**—Previous to the work which I now publish and of which the complete re-

---

<sup>1</sup> In certain German works a formula is given as Grashof's in which the coefficient is a little smaller than 15.26 (by about 1%) in order to allow for the contraction of the jet.

sults are given, we possessed several series of experiments on the flow of steam; especially in France those of Minary and Résal in 1861;<sup>1</sup> and more recently those of M. H. Parenty in 1891<sup>2</sup>; in America those of Napier in 1866<sup>3</sup>; then those of Peabody and Kunhard in 1888 and 1890,<sup>4</sup> and Miller and Read in 1895<sup>5</sup>; in England the experiments made quite recently by Rosenhain in 1899.<sup>6</sup> All these authors have used the same method, consisting in condensing the steam after it has passed through the nozzle under test in a surface condenser, and then weighing the water thus condensed during a certain lapse of time.

This method, which may be called the direct method, presents many inconveniences, however.

Firstly: One cannot operate on large nozzles without difficulty because a very large condenser is necessary for the experiments, and it is desirable to employ large nozzles—first, because then we approach the conditions of practice, and, second, the effect of friction and the thermal influence of the walls are reduced.

Secondly: The duration of a series of experiments is unavoidably long, since for each measurement it is necessary to wait until a considerable quantity of water

---

<sup>1</sup> Annales des Mines, 5th série, Vol. IX.

<sup>2</sup> Annales de Chimie et de Physique, May 1896.

<sup>3</sup> On the Velocity of Steam and Other Gases. Spon, 1896.

<sup>4</sup> American Society of Mech. Eng., 1890.

<sup>5</sup> Technology Quarterly of Boston, 1895, Vol. VIII.

<sup>6</sup> Experiments on Steam-jets (Pro. of Civil Eng., 1900).

has been condensed, which involves each trial, lasting ten to fifteen minutes.

Thirdly: The method is not very precise because of the incessant variation of the steam-pressure. It is very difficult, in fact, to maintain the pressure of a boiler practically constant during some ten minutes, and the variations are reproduced at the nozzle. This involves taking averages, which complicates the experiment and renders it less precise.

Fourthly and finally: The entrained moisture is weighed in addition to the steam discharged, and consequently the measurement is falsified by a corresponding quantity nearly equal to the proportion of water, so that results obtained by this method are generally too large. For example, on the diagram in Plate II some of Résal's results are plotted (by triangles), and it will be seen that they are about 3 per cent too high. Those of Rosenhain and other authors give similar results.

**8. Actual Experiments.**—To avoid these sources of error all readings should be completed in a very short interval of time, as soon as the steady state of flow is properly established. The experiments can then be made rapidly and precisely. I achieved this result by the application of a new and indirect method consisting in condensing the steam discharged by the nozzle in a current of very cold water and at the same instant measuring the total discharge of water and the rise in its temperature. This method is founded on the use of an ejector condenser. The total quantity of water flowing after con-

condensing the steam was ascertained by discharging the water through a conical nozzle under a head which could be accurately measured. Knowing the total quantity discharged  $Q$  and the rise of temperature, the weight of steam discharged  $X$  is deduced from the specific heat  $C$  and the total heat of formation of steam  $\lambda$  by the formula

$$X = Q \frac{C\theta}{\lambda - Ct_0}, \quad . \quad . \quad . \quad . \quad . \quad (10)$$

$t_0$  being the initial temperature of the water.

The advantages of this method are evident. The duration of each individual test did not exceed two to three minutes. The steady state was established in about a minute, and when all the instruments had reached a stable condition the reading of their indications was made in a few seconds. The conditions of pressure were then changed, and so on. The accuracy of the experiments I estimate as follows:

#### 9. Estimation of the Precision of the Measurements.

—The increase of temperature was on the average about  $20^\circ \text{C.}$ , and the measurement of each of the initial and final temperatures in the ejector condenser were made to within one twentieth of a degree, which gave a mean error of 1 in 400. As I shall show later, however, a cause of error was always present which was quite important; namely, the displacement of the zero of the thermometer on the discharge side of the condenser during the course of the measurements. This displacement reached about two tenths of a degree,

being nearly 1 per cent, or one half of 1 per cent, above or below the mean. The initial and final pressures were obtained by different gauges. At first metallic gauges were used and afterwards a mercury manometer provided with three-way cocks which allowed of the branches being placed in communication either with the atmosphere or with the interior of the pipes, when the pressure or the difference of pressures did not exceed 1 kilogramme per square centimetre. I was thus able to measure by this mercurial manometer either the initial or final pressures or their difference. The principal reading, that of the initial pressure  $P$ , was ordinarily made by means of a large Bourdon gauge especially constructed for my experiments and reading to  $\frac{1}{100}$  of a kilogramme, which for 5 kilogrammes mean pressure corresponds to a mean approximation of 0.2 per cent. The mean head  $H$  on the nozzle for measuring the water discharged was about 450 millimetres. As the error of reading was less than  $\frac{1}{2}$  millimetre, the error in calculating the discharge could not exceed an average of one in 1800. The coefficient of discharge of the nozzle was previously tested. The error which could enter into this determination, which will be described later on, was a few thousandths at the most.

The diameter of the steam-nozzles was obtained with great precision by means of mandrels calibrated to  $\frac{1}{100}$  of a millimetre. As the mean diameter was 15 millimetres, the error in the diameter could attain 1 in 1500, or in the area 1 in 750.

A cause of error which was very difficult to eliminate was the expansion of the nozzles while the steam was passing through them. While the coefficient of expansion of the bronze was known to be 1 in 600, the temperature at the end of the nozzle could not be ascertained exactly, but it could be estimated certainly to within 40 degrees, and this was sufficiently close, because the resulting error was then less than 1 in 1500 in the diameter, or 1 in 750 in the area.

To sum up, then, all the individual errors of the different readings, that due to the displacement of the zero of the thermometer at the discharge excepted, are of the order of one to three one-thousandths. Added together they would give a total accidental error in the calculated results exceeding 1 per cent, but taking one with another, the mean error would be probably not more than a few thousandths.

Two sources of error must be examined which are inseparable from the method adopted: firstly, the entrained moisture, and, secondly, the effect of radiation from the apparatus.

Regarding the entrained water it should be remarked that our method avoided this cause of error as far as possible. Because if there were, for example, 1 per cent of entrained moisture, this quantity would tend to reduce slightly the velocity of discharge of the steam passing through the orifice, and consequently to diminish the total quantity flowing per second. But, on the other hand, some of the heat contained in this water will be given up to the water leaving the condenser

and replace part of the heat lost by the reduction of the flow of steam; so that, finally, if the calculation be made, it is found that the actual deficit of heat will be only about half that corresponding to the proportion of water. This method, then, even if it does not eliminate the influence of the entrained water completely, reduces that influence by one half; and further, the error is in the opposite direction to that produced in the surface-condenser method. In place of adding to the discharge it decreases it.

But I arranged to avoid entrained moisture as far as possible, and also to measure its amount. A separator was placed in the steam-supply pipe just before the nozzle, and between this separator and the nozzle a sample of the steam was taken which was analyzed in an apparatus especially designed for this object, which permitted the moisture in the steam to be measured. In practice I never had more than two to three one-thousandths of water in the steam after passing the separator, so that the error in the measurements caused by the entrainment of water should be less than fifteen ten-thousandths.

As to the effect of radiation, though the apparatus was not lagged, this was relatively very small because of the large discharge of steam. In order to ascertain the importance of the loss of heat by radiation, I passed a small current of steam at atmospheric pressure through the apparatus and weighed the water condensed by the cooling action of the walls. The quantity thus obtained was 2.3 kilogrammes per hour. As the mean

temperature of the parts exposed to radiation between the steam-nozzle and the discharge thermometer was generally much less than  $100^{\circ}$  C. during the experiments, it may be admitted that the radiation was less than 0.6 kilogrammes per hour, while the discharge was on the average 500 kilogrammes, or a loss of twelve ten-thousandths at the most. Finally, it may be observed also that the influence of radiation has the same effect as the entrained moisture and could cause only a deficit in the calculated quantity of steam, while we shall see that the experimental results give somewhat larger figures for the discharge than those calculated theoretically from Regnault's tables.

A difficulty arose in measuring the water discharged on account of the air contained in it. This air, at first dissolved in the water, is set free under the influence of the vacuum in the condenser and remains in this state up to the nozzle used for measuring the water, so that if precautions were not taken the discharge from this nozzle would be a mixture of water and air. Under these conditions measurements of the quantity of water discharged would have been erroneous. This difficulty was overcome as shown in Plate I by arranging a separator in the tank below the water-nozzle by means of which the air was disengaged and carried to the upper portion of the tank, where it was discharged through a small nozzle three millimetres in diameter, which permitted of its being measured. The water discharged by the principal nozzle was then quite clear and free from air.

**10. Arrangement of the Apparatus.** — The experiments were made during the winter of 1895–96 at St. Etienne, in the factory of Bietrix & Company, who obligingly placed at my disposal a boiler capable of giving 1000 kilogrammes of steam per hour at a pressure of 15 kilogrammes per square centimetre. The experiments were made in winter so as to be able to use cold water at a temperature of about  $6^{\circ}$  C. and obtain a rise of  $40^{\circ}$  to  $50^{\circ}$  C.

Three convergent nozzles were tested successively, then an orifice in a thin plate; finally we tested a convergent-divergent nozzle. The convergent nozzles are shown in Plate II. They had a final diameter of 10.49 millimetres, 16 millimetres, and 24.20 millimetres respectively. The thin-plate orifice, also shown in Plate II, had a diameter of 20.12 millimetres.

In order to make all the necessary readings the arrangement of apparatus was somewhat complicated. It is represented in perspective at the left and diagrammatically at the right of Plate I.

*T* is the nozzle under test arranged in the joint *I* between the steam-supply pipe *N* and the exhaust-pipe *B*.

The supply-pipe *N* had an inside diameter of 60 millimetres. The exhaust-pipe *D* (inside diameter 120 millimetres) was fitted with a plate *p* forming a screen for the current of steam leaving the nozzle so as to break up the jet.

*A* is the ejector condenser. The condensing water enters by the pipe *C* and leaves by the pipe *D*.

*S* is the water-nozzle of the condenser. The distance

between it and the throat of the condenser could be varied by the handle  $g$ . By means of this nozzle the current of steam entering the condenser could be throttled.

$K$  is a cock on the steam-supply pipe operated by the handle 18. This cock enabled the initial pressure at the nozzle to be varied at will, while the back pressure could be varied similarly by the condenser-nozzle  $S$ .

$J$  is a centrifugal separator. The separated water is discharged by the cock 1 and the pipe 2.

$L$  is the apparatus for measuring the moisture remaining in the steam. The description of this apparatus is given in *Annales des Mines*.<sup>1</sup> It is composed of a coil 4 heated by a flame 5, and a combining-chamber 6. The sample of steam obtained by the cock 3 is separated into two equal portions. One half goes directly to the combining-chamber, while the other is superheated in the coil 4. The mixture is discharged by the regulating angle-valve 9.

The superheat in the half passing through the coil 4 is measured by the thermometer  $t_3$ , and the superheat of the mixture by the thermometer  $t_2$ . The pressure in the chamber is observed by the gauge  $M_3$ . The moisture in the steam is obtained from the readings of these two thermometers and the gauge.

$E$  is a sheet-iron tank in which the air is separated

---

<sup>1</sup> A. Rateau. Appareils servant à mesurer l'humidité d'une vapeur. *Annales des Mines*, April 1897.

from the hot water leaving the condenser. This tank is divided about the middle by a semicircular baffle 13 under which the air collects. The bubbles rise to the upper part of the tank by the pipe 14, and the air flows into the atmosphere by the small nozzle *J*. The pressure of discharge of the air is measured by the water-gauge 19.

*F* is the nozzle for measuring the discharge of water. It has a final area of 10.99 square centimetres at 15° C. The head under which the flow takes place is measured by the water-gauge *hh*. Adjacent to this gauge is a thermometer *t*<sub>5</sub> by which the temperature of the gauge could be measured and the density of the water deduced.

*G* is a barrel having a capacity of 350 litres into which the water is discharged by the nozzle and serves to calibrate the nozzle. The barrel is provided with a glass tube *KK*, allowing the exact level of the water to be ascertained. Further, a baffle 17, arranged in the arc of a circle, receives the jet of water in a thin film so that it falls into the barrel without shock and without disturbing the surface of the water.

*M*<sub>1</sub>, *M*<sub>2</sub>, *M*<sub>3</sub> are the pressure-gauges for measuring the initial and final pressures at the steam-nozzle *T*.

The mercury manometer is shown at *cd*. One of the branches *c* communicates with either the high-pressure side of the nozzle or the atmosphere by means of the three-way cock 11; the other branch *d* communicates with either the atmosphere or with the discharge side of the nozzle by the three-way cock 10. By means



of these three-way cocks the initial or final pressures or the difference between them could be measured as the case required. In addition the barometric height and the temperature of the surrounding air were carefully observed so as to obtain the absolute value of the readings of the manometer.

The temperatures  $t_0$  and  $t_1$  of the current of water before and after passing through the condenser were measured by the thermometers  $e$  and  $f$ . These mercury thermometers were graduated to twentieths of a degree and were previously compared very carefully with a Baudin standard thermometer. I also reduced the scale to that of the air-thermometer, so that with the exception of the displacement of the zero, regarding which I will speak immediately, all temperatures are given to within one twentieth of a degree less, or one tenth of a degree more, than the scale of the air-thermometer.

**II. Remarks.**—Some observations are necessary on the subject of measuring the principal temperatures and pressures.

The reading of the pressure-gauges presented no difficulty. For pressures below 10 kilogrammes per square centimetre I employed the standard gauge  $M_1$ , and for pressures above this the standard gauge  $M_2$ . But the management of the mercury manometer offered some difficulties. The steam condensed in the tubes above the mercury and formed columns of water often broken up with air-bubbles, and the reading of the manometer had to be corrected for these broken col-


EXPERIMENTS ON THE FLOW OF STEAM

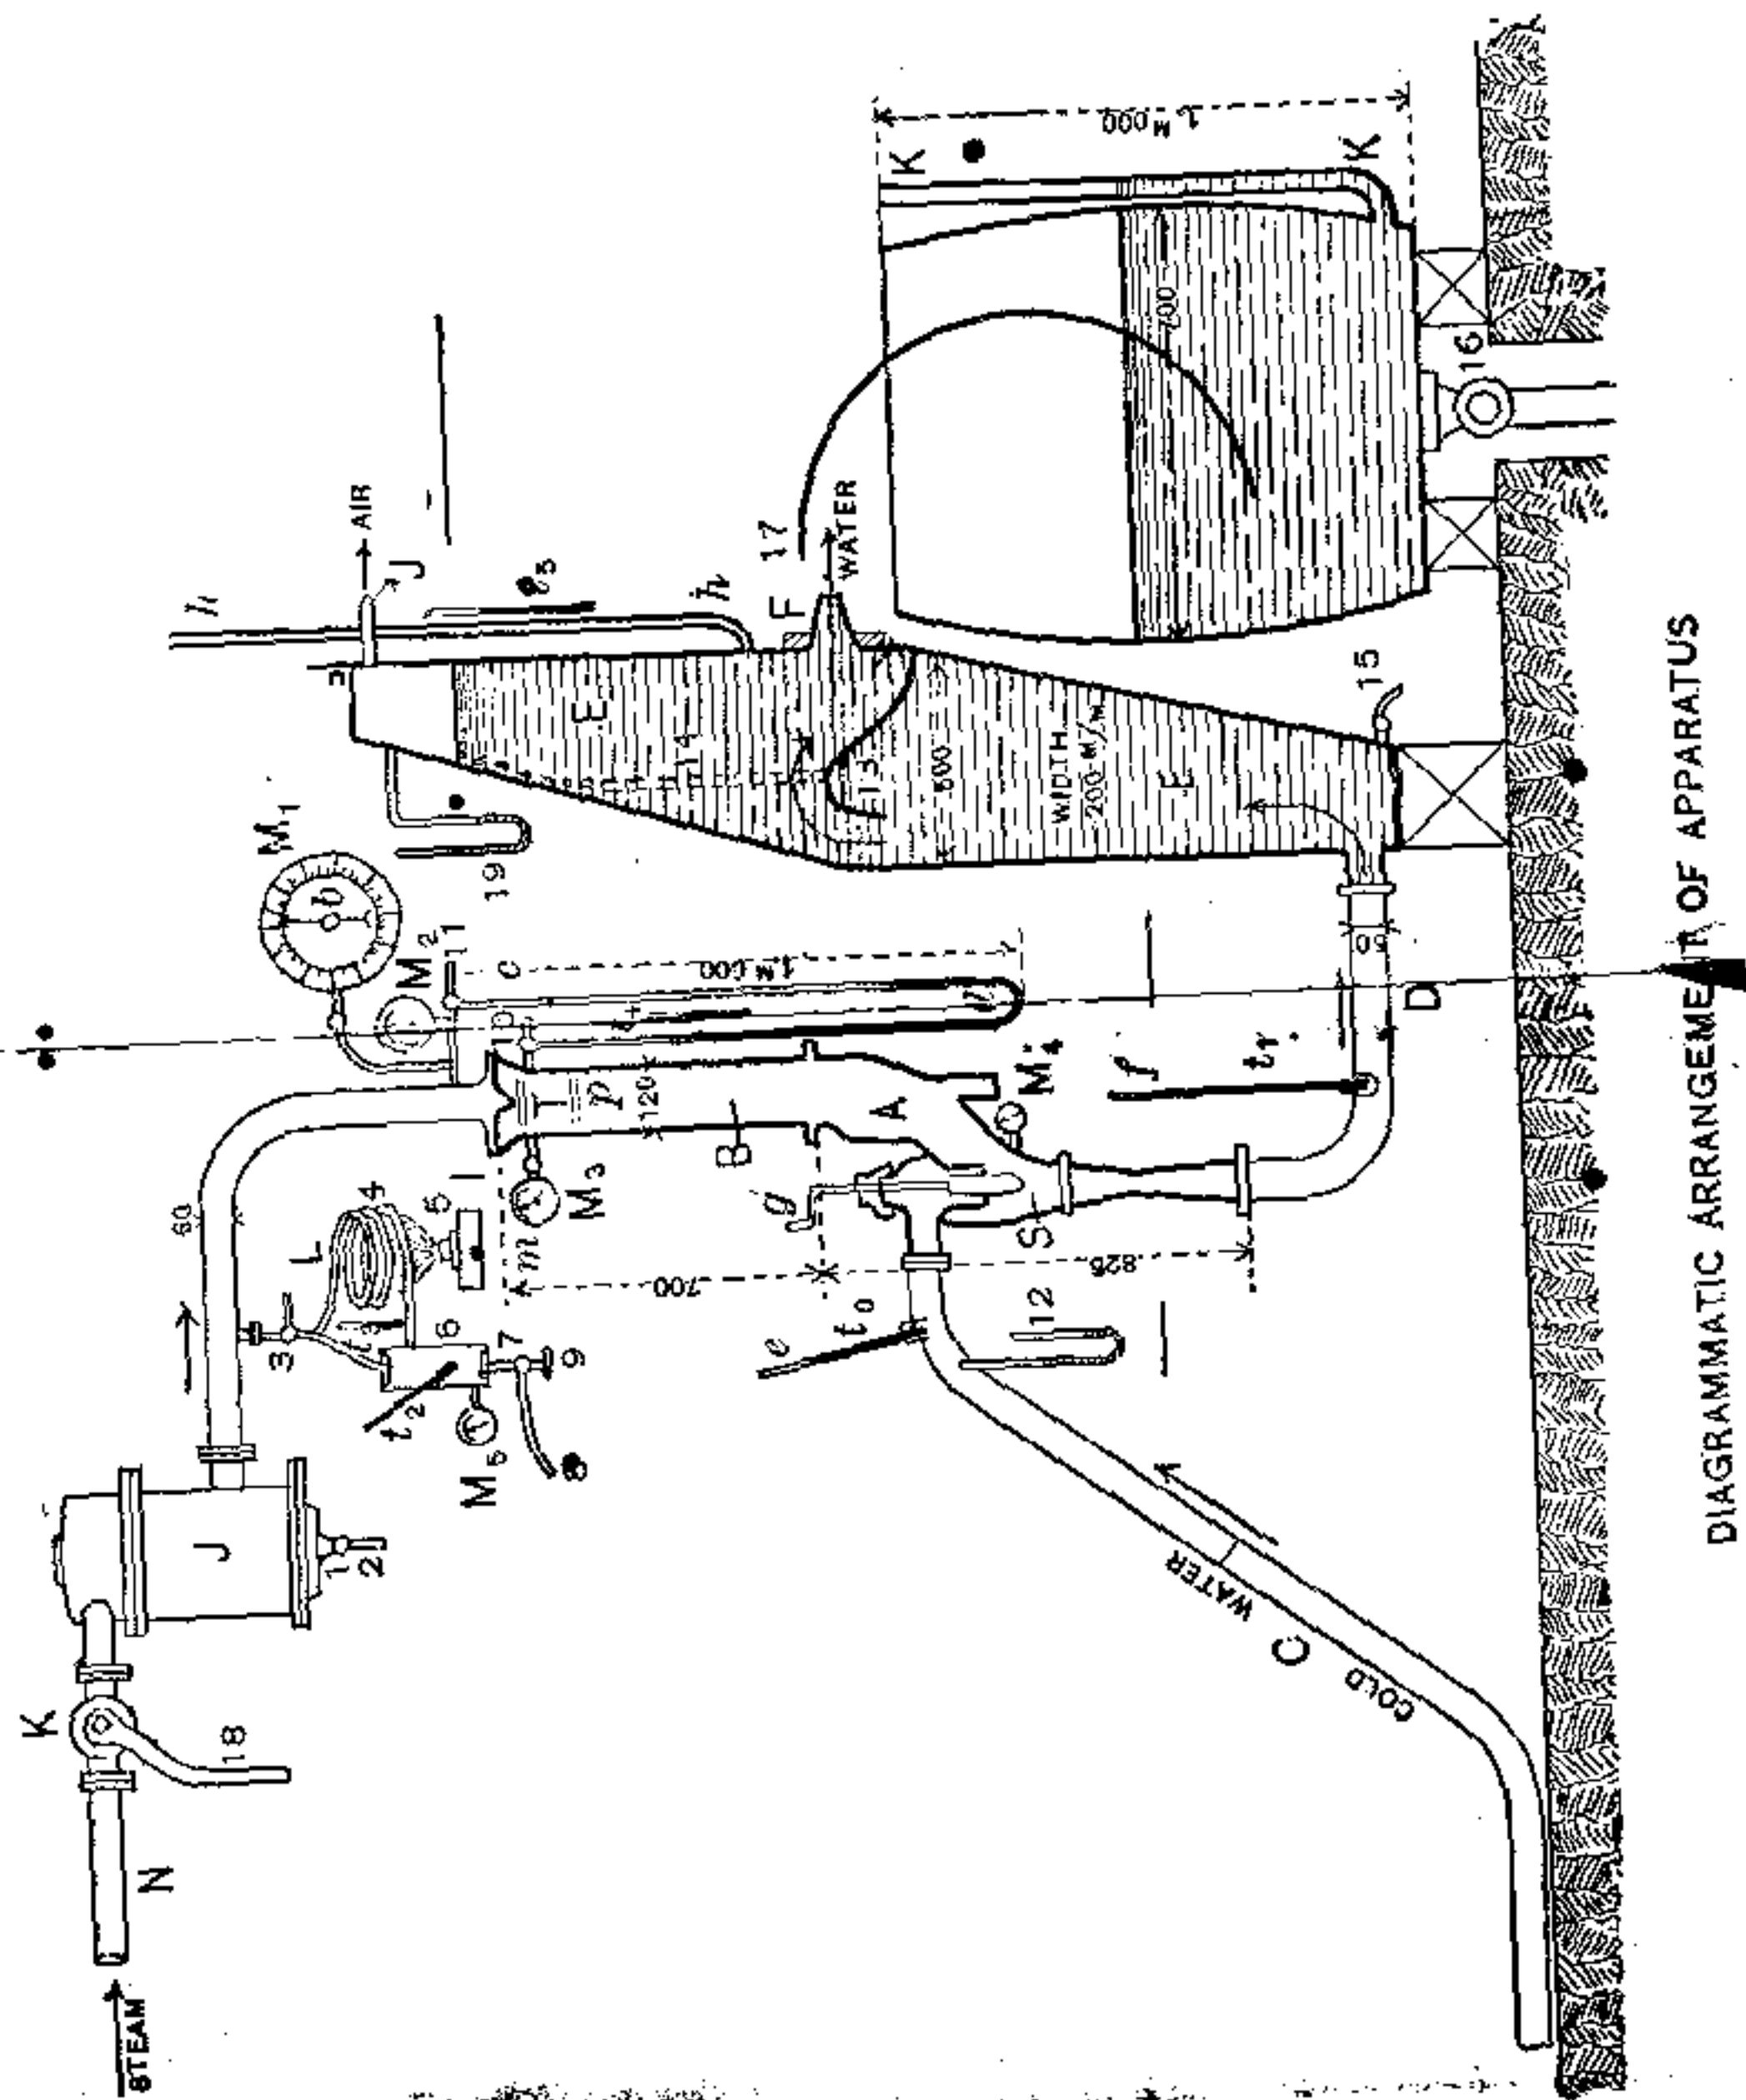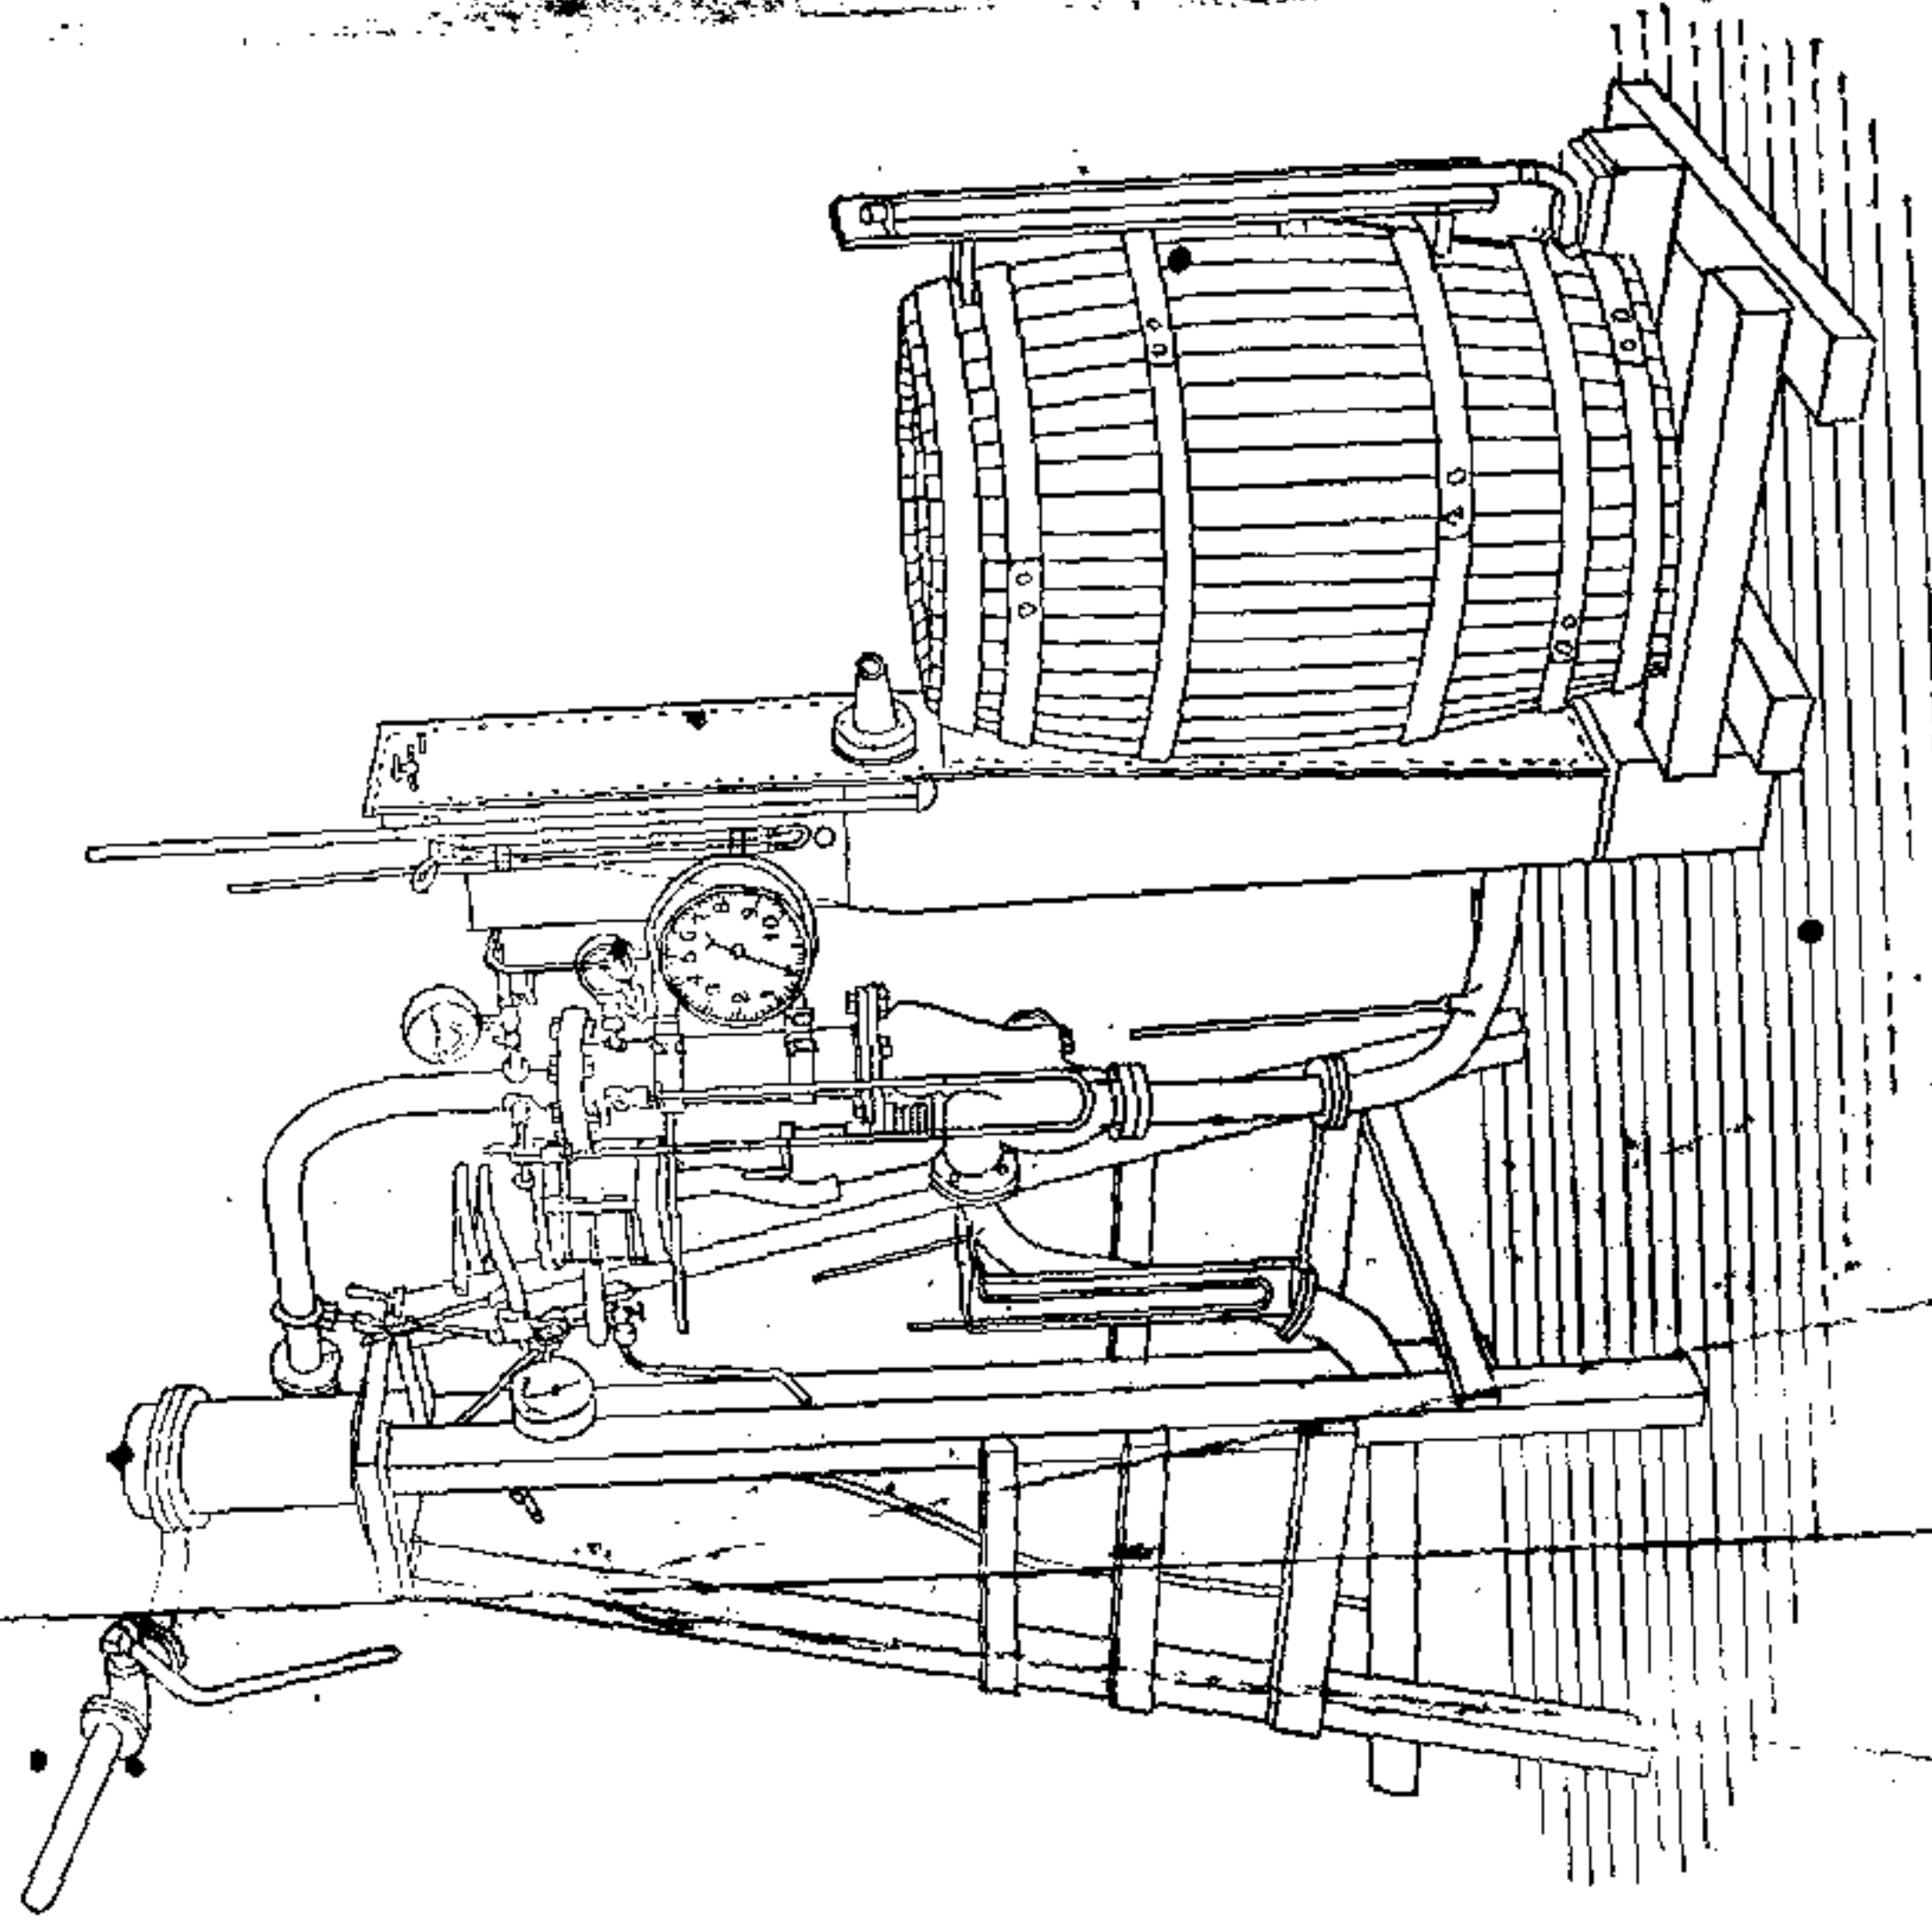


DIAGRAMMATIC ARRANGEMENT OF APPARATUS




EXPERIMENTS ON THE FLOW OF STEAM

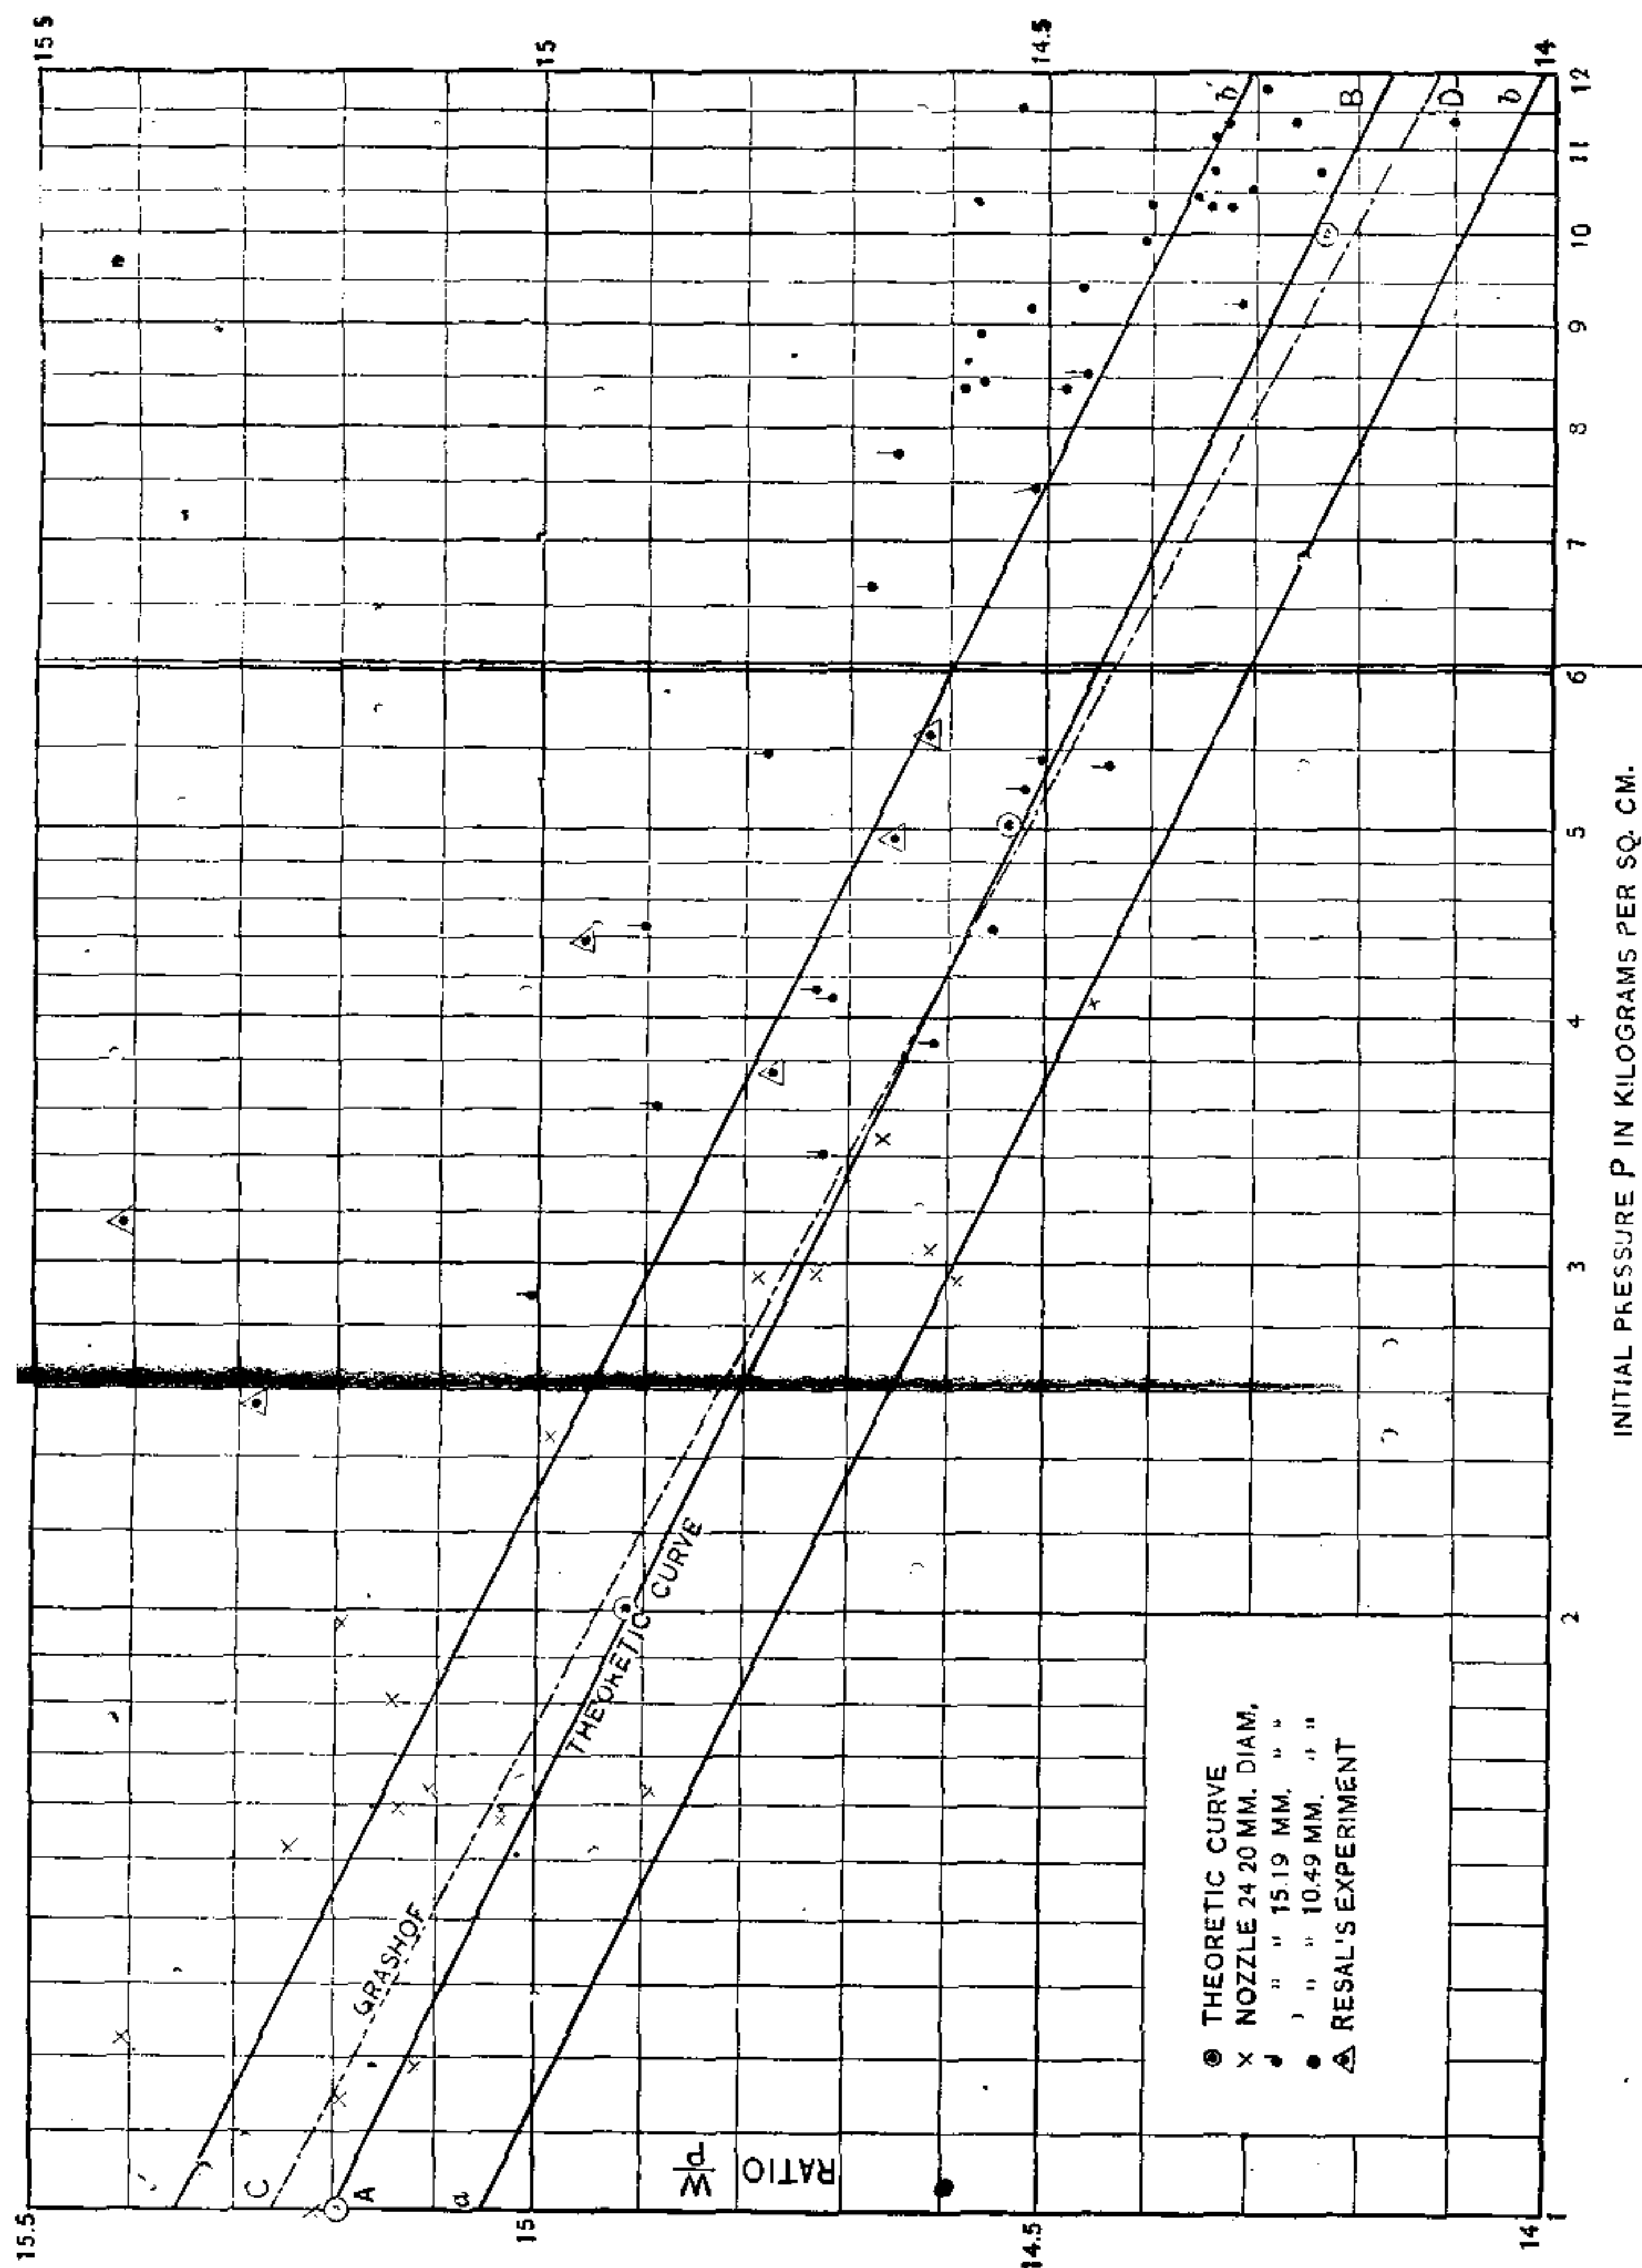


ORIFICE IN THIN PLATE

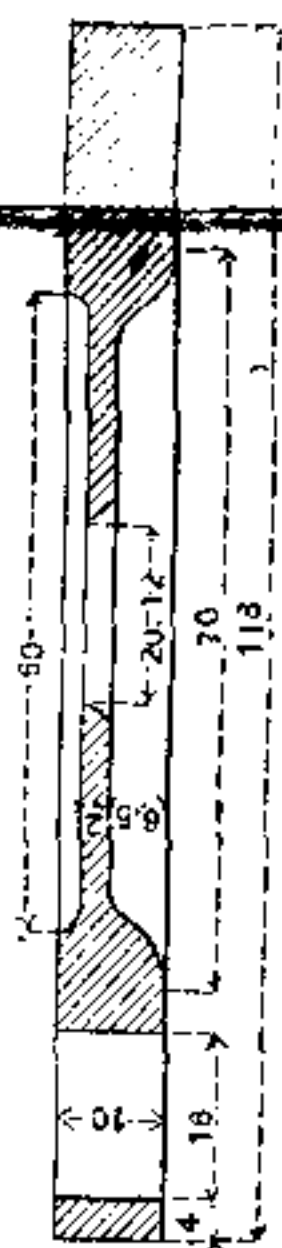


A. NOZZLE 10.49 MM. DIAM. AT 15°

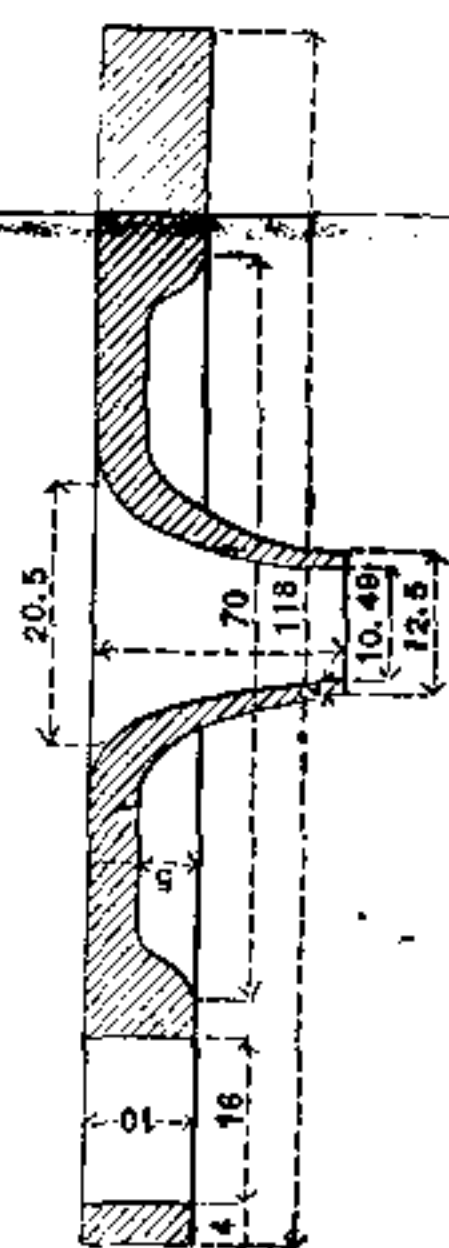


B. NOZZLE 15.19 MM. DIAM. AT 15°

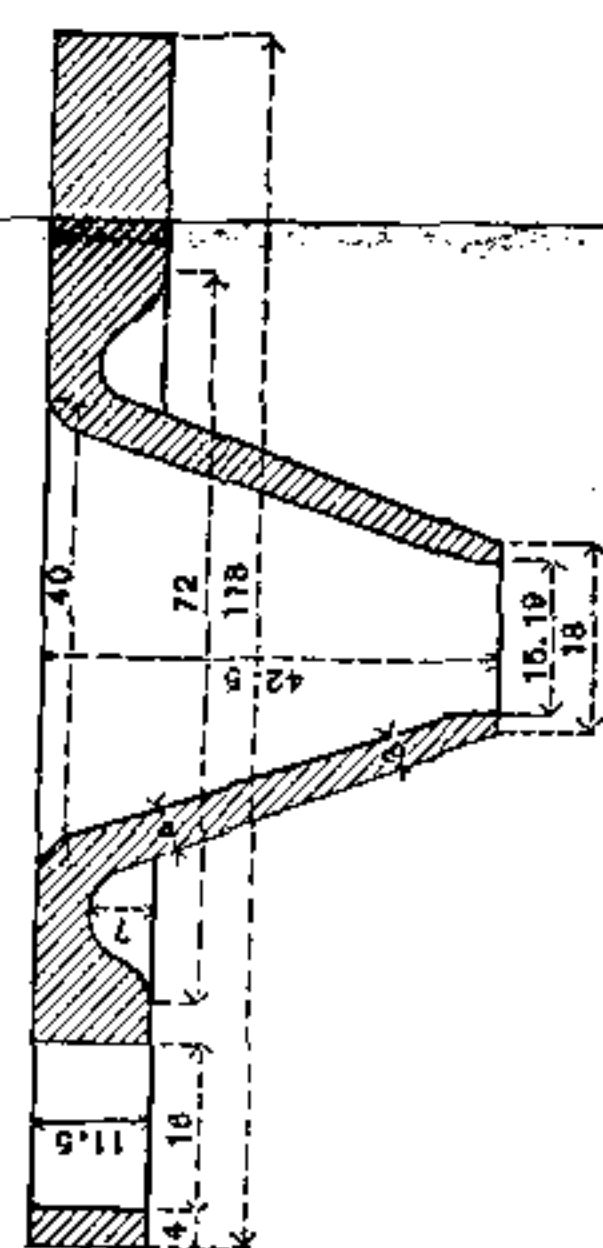


C. NOZZLE 24.20 MM. DIAM. AT 15°

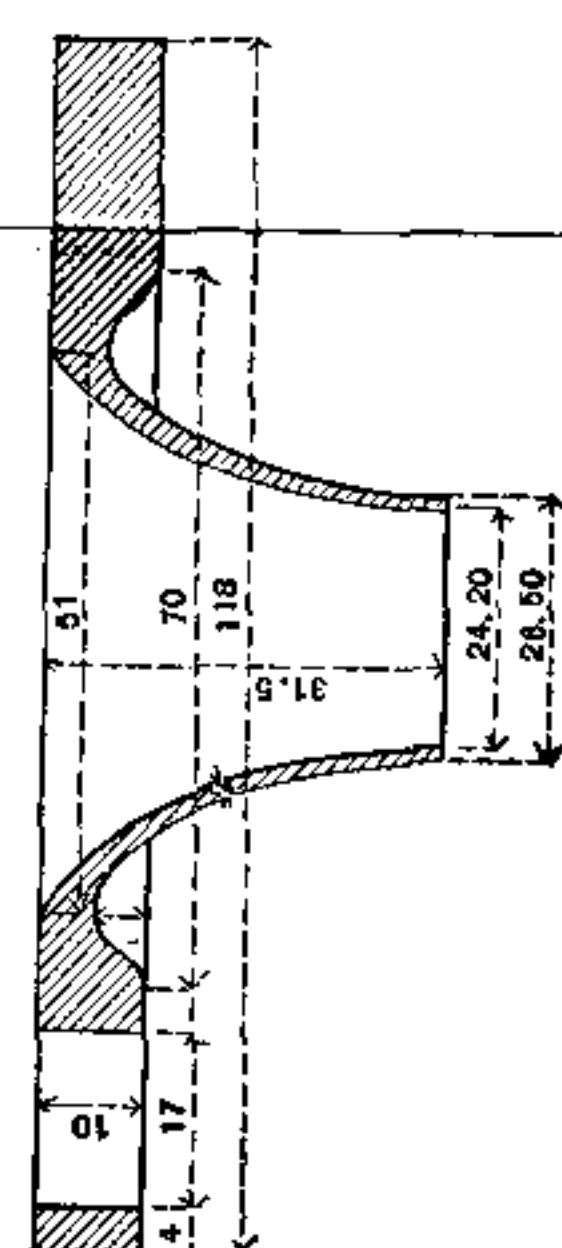



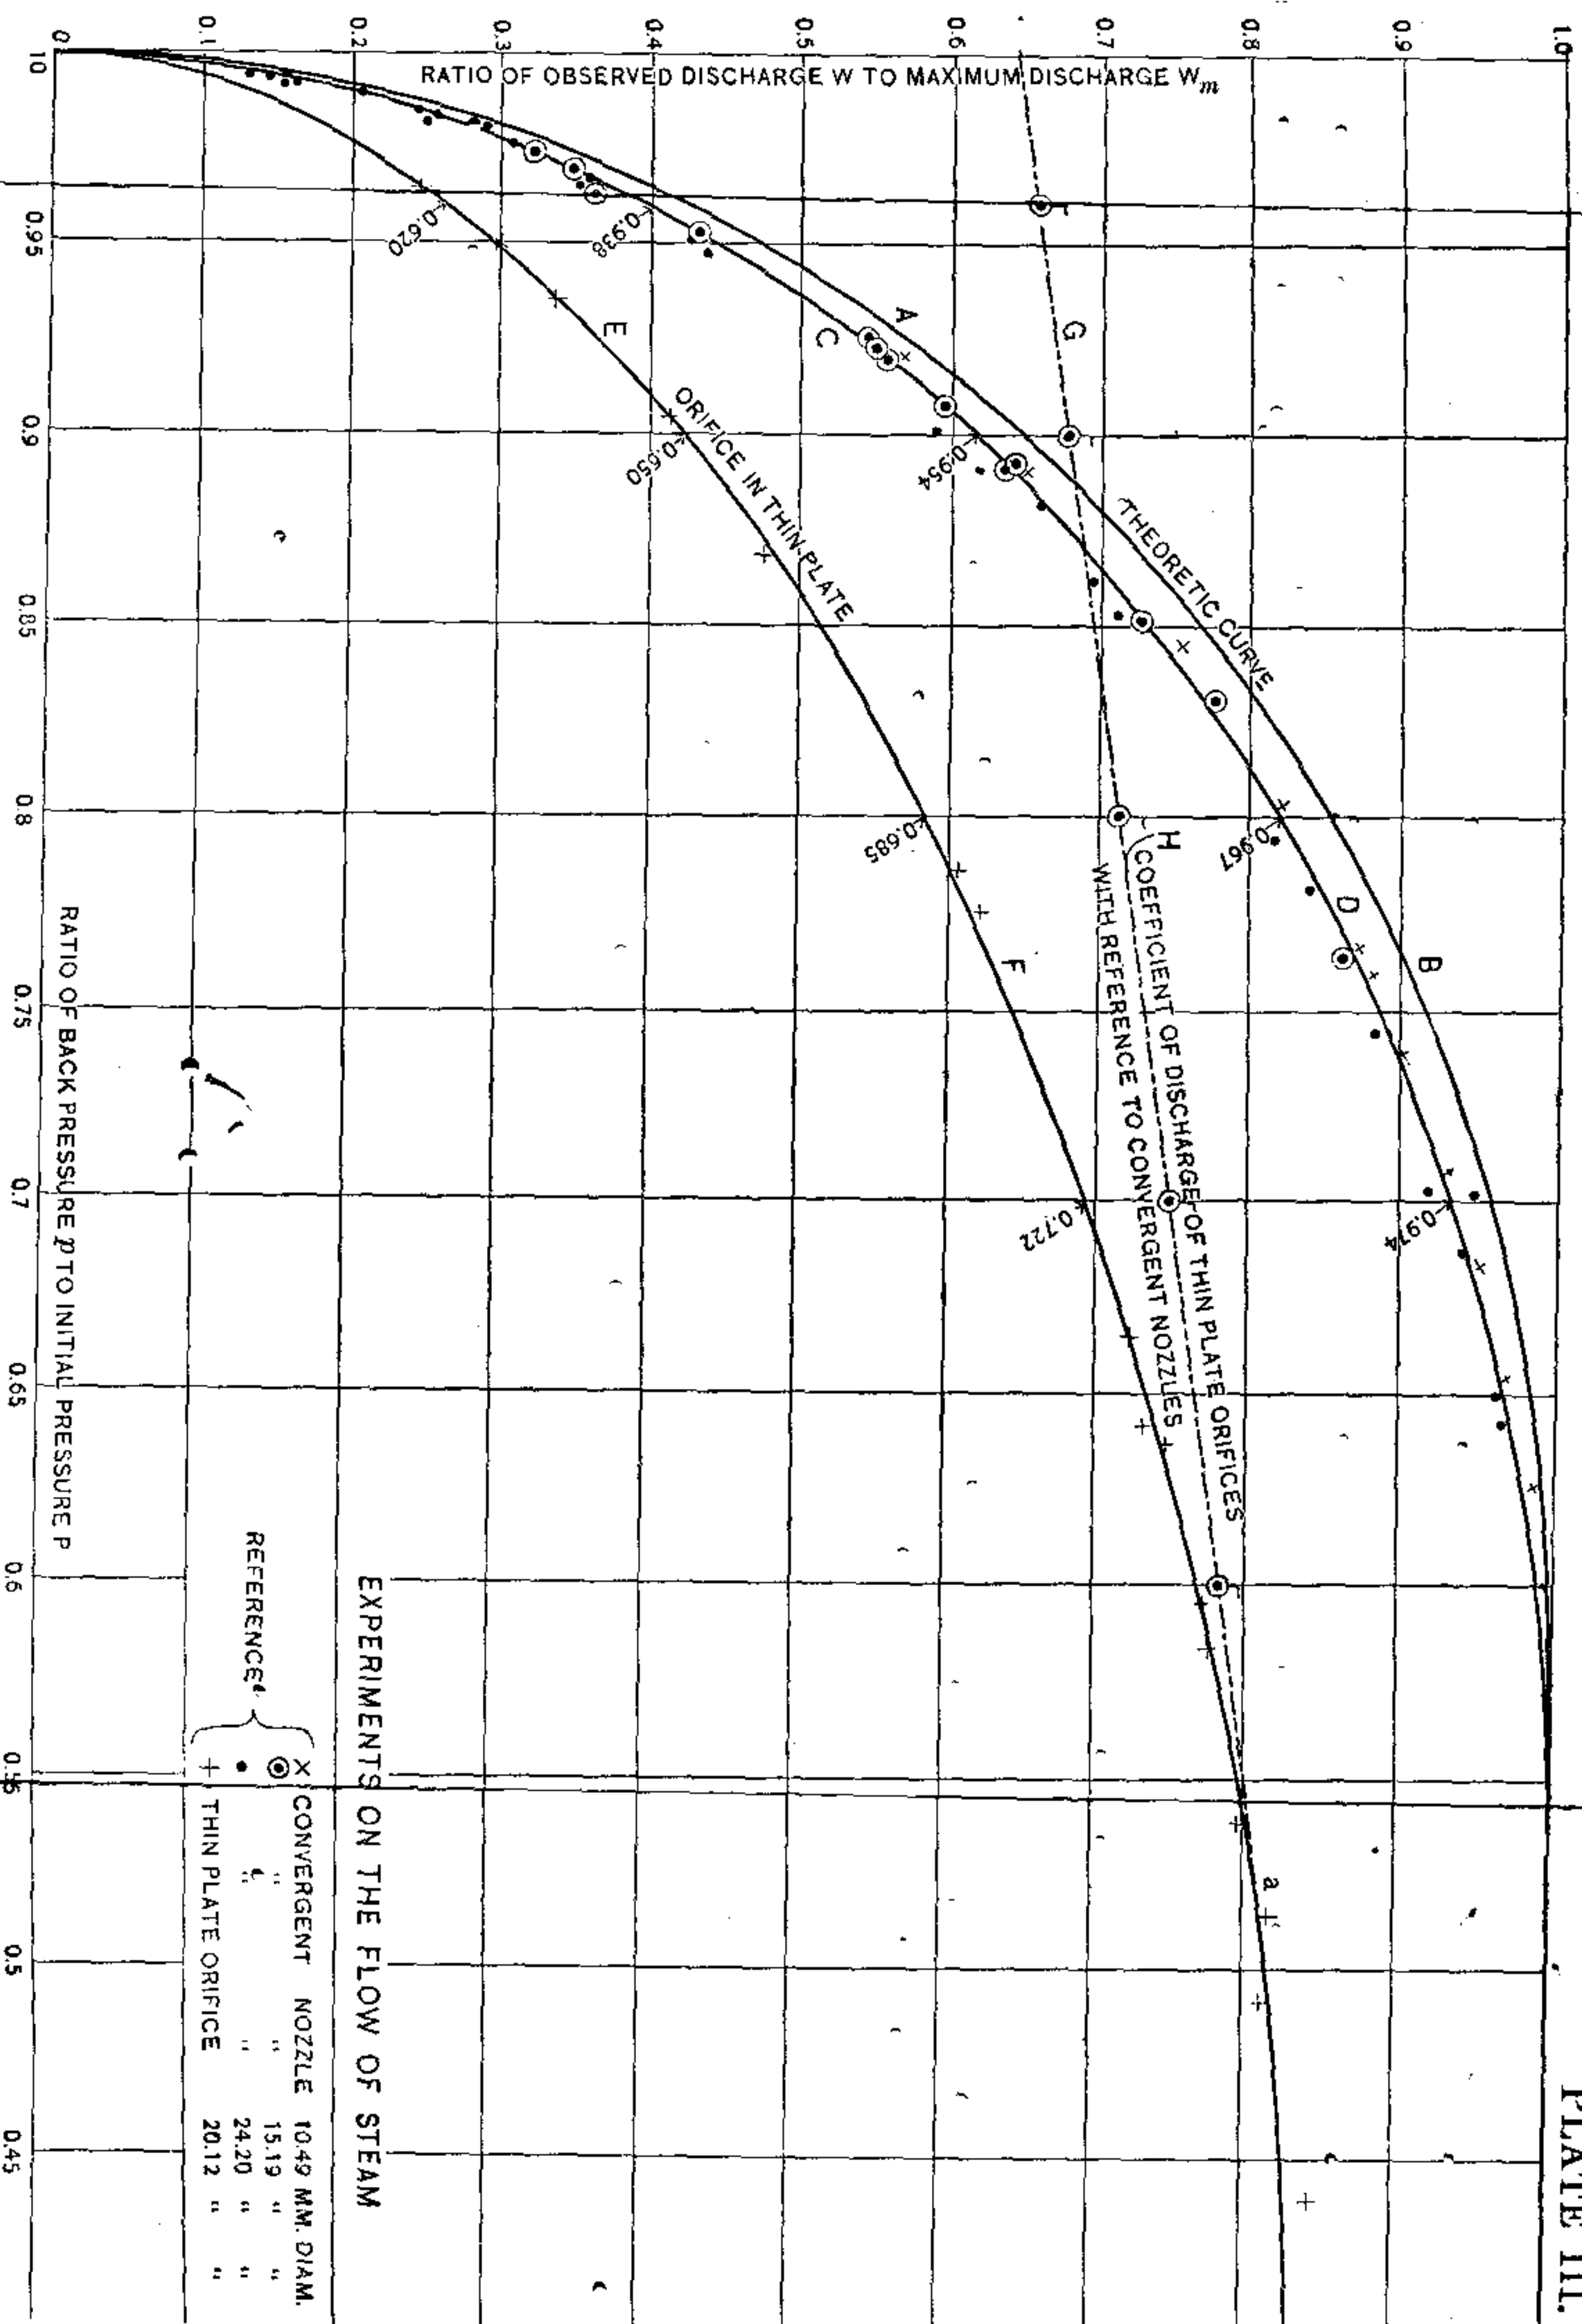



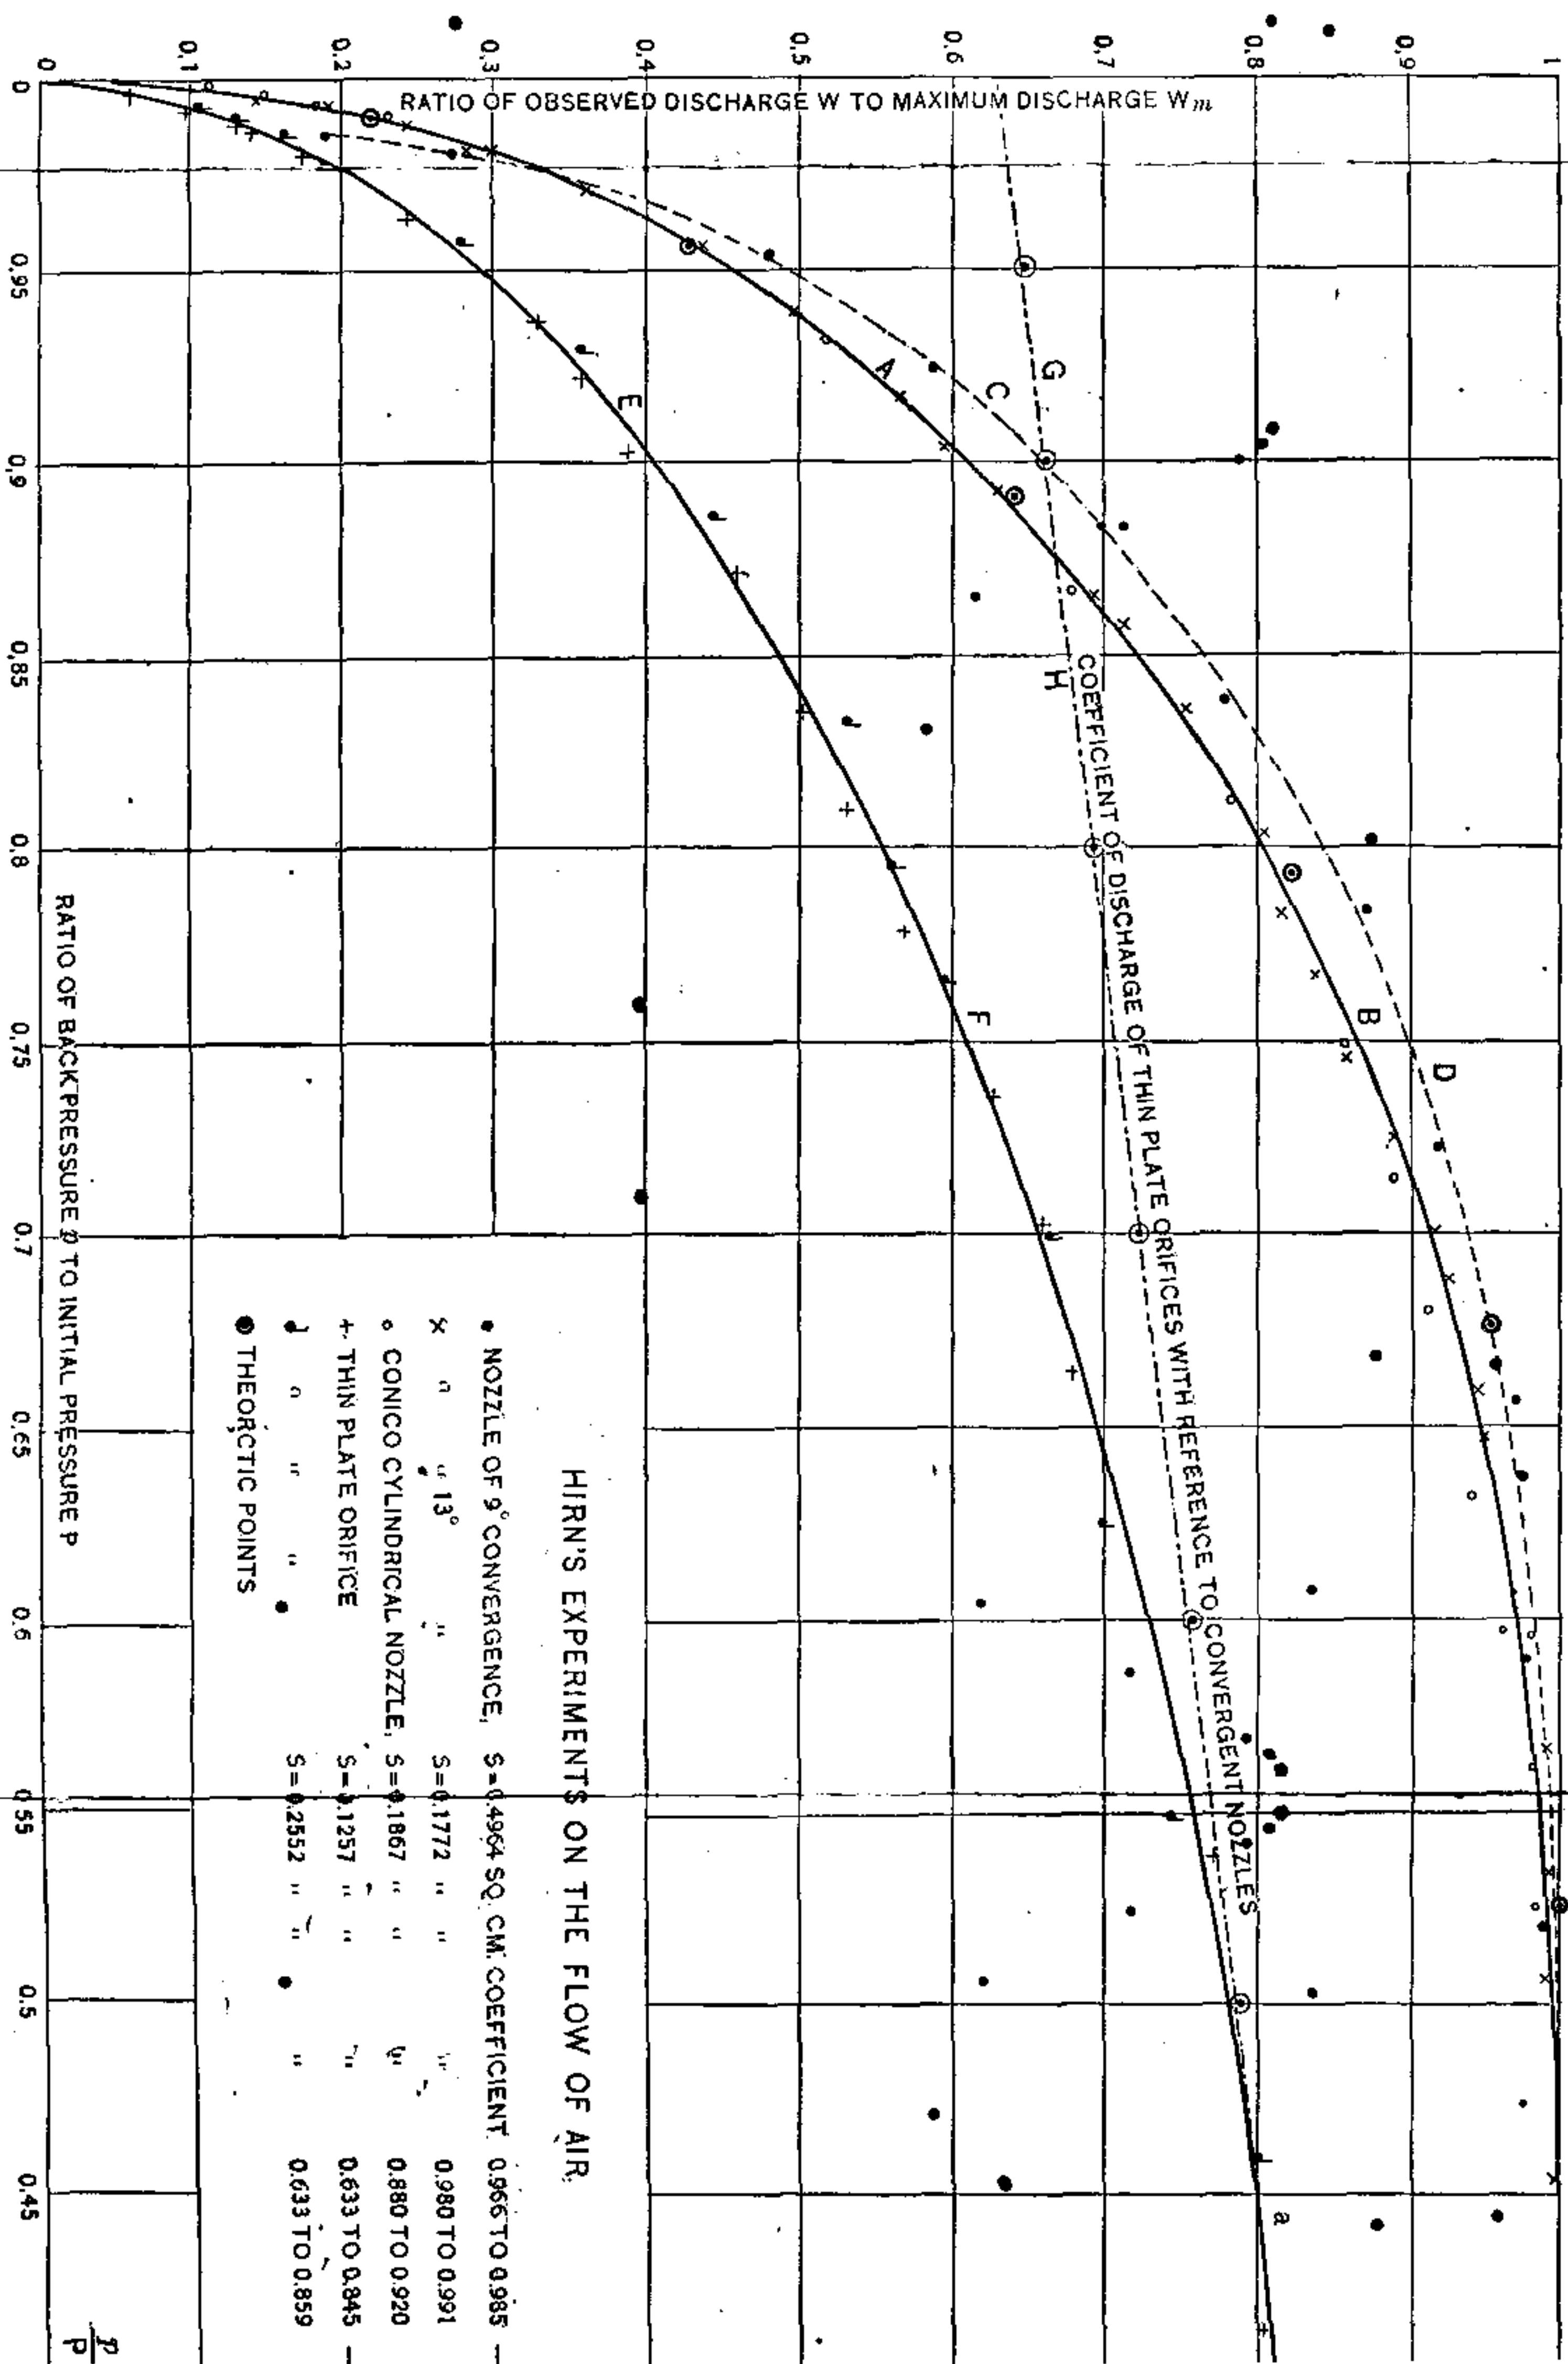



umns of water. On account of this the readings of the mercury manometer were not always as exact as I could have wished. When the columns of water were not discontinuous, as sometimes happened, the correction could be made with certainty.

The thermometers *e* and *f* were plunged in small iron wells penetrating into the interior of the pipes conveying the water. These thermometer-cups were filled with mercury, so that the transmission of heat was very rapid. In fact the reading of the thermometers became steady in a few seconds. It may be asked whether these thermometers really indicated the true mean temperatures of the water. In the case of thermometer *e*, placed in the current of cold water, there can be no doubt that this was so, for the temperature of the cold water varied very little. But in the case of thermometer *f*, plunged in a current of water which was necessarily but little homogeneous, immediately at the outlet from the ejector, this was more doubtful, especially as the temperature of this water varied greatly from one experiment to another. I think, however, that the readings of these temperatures were always very close to the true mean, because on putting a thermometer into the water at the mouth of the nozzle *F*, where the temperature had evidently become uniform throughout the mass of water, I found that this thermometer always gave the same reading as thermometer *f* to within one tenth of a degree, sometimes more, sometimes less. This difference may be attributed to the walls of the tank *E* not immediately reach-

ing their steady temperature after a change of conditions.

The thermometers used were made of ordinary glass. I had them carefully compared, as I said, with a standard Baudin thermometer to obtain the necessary corrections, if possible, to one twentieth of one degree. Unfortunately I found out too late that I had been wrong in not using a good thermometer made of hard glass for measuring the temperature of the hot water. I thought that up to  $50^{\circ}\text{C}$ . the displacement of the zero occasioned by the expansion of the glass could be neglected. I found that it was not so, however.

My first calculations having disclosed an error of more than 1 per cent between the experimental results and the theoretical figures, I suspected that the thermometer was incorrect, and standardized it again *de novo*. I found that its zero was displaced fully two tenths of a degree when it was subjected to a temperature of  $50^{\circ}$ , which was sometimes exceeded in my experiments, and that the zero returned to its original position when cold. This annoying variation in the zero was sufficient to render some of my results incorrect by over 1 per cent.

To reduce this influence to a minimum I ascertained the mean position of the zero due to the changes of temperature during several successive days. Finding that this mean differed by  $0.15^{\circ}$  from that which I had first obtained, I corrected all my results by this amount. For this reason the chart and the conclusions given

here for the formula for the discharge are not identical with those in my *Rapport sur les Turbines à Vapeur au Congrès de Mécanique Appliquée*, 1890.<sup>1</sup>

**12. Calibration of the Water-nozzle.** — The determination of the total weight of water discharged depends upon the coefficient of discharge of the water-nozzle. Consequently it was necessary to measure this coefficient with the utmost possible accuracy at the outset. This calibration was repeated several times. The diameter of the mouth of the nozzle was 37.4 millimetres at 15° C.

Two glass reference-marks were fixed in the barrel into which the water was discharged by the nozzle, and the water contained in the barrel between these two points was carefully weighed. At an interval of two months the weights obtained were 278.2 kilogrammes and 278.05 kilogrammes at about 15° C.; so that the error to be allowed for in this measurement was not more than one in two thousand.

While the head  $H$  measured by the water-gauge  $hh$  remained quite constant, the time required to fill the barrel between these two marks was noted with a good seconds chronometer. To give an idea of the approximation obtained I produce below the calibration measurements made on the 27th and 30th of January, 1896. (See the Table below.)

---

<sup>1</sup> This report was drawn up hurriedly a few days before the Congress. The portion relating to the flow of steam contains some errors which are rectified here.

# EXAMPLES OF THE CALIBRATION OF THE WATER-NOZZLE.

*Diameter of the nozzle 37.4 mm. Contents of tank 278.5 litres.*

| Temperature<br>of the Water. | Head,<br>$H$ .                                                                        | Tempera-<br>ture $t$ of<br>the Water-<br>manom-<br>eter.                             | Time to<br>Fill Tank.                                                       | Time<br>reduced to<br>$H = 478$<br>mm.                                      | Averages.                                                     | Co-<br>efficient<br>of Dis-<br>charge. |
|------------------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------|----------------------------------------|
|                              | Millim.                                                                               |                                                                                      | Seconds.                                                                    | Seconds.                                                                    | Seconds.                                                      |                                        |
| Jan. 27,<br>1896             | $\left\{ \begin{array}{l} 29.35^\circ \\ 25.70 \\ 31.90 \\ 22.65 \end{array} \right.$ | $\left\{ \begin{array}{l} 22^\circ \text{ C.} \\ 17 \\ 17 \\ 18 \end{array} \right.$ | $\left\{ \begin{array}{l} 79.0 \\ 79.6 \\ 77.5 \\ 78.2 \end{array} \right.$ | $\left\{ \begin{array}{l} 84.6 \\ 86.1 \\ 85.4 \\ 84.8 \end{array} \right.$ | $\left\{ \begin{array}{l} \\ 85.2 \\ \\ \end{array} \right.$  | 0.9711                                 |
| Jan. 30,<br>1896             | $\left\{ \begin{array}{l} 32 \\ 30 \\ 29 \\ 29 \end{array} \right.$                   | $\left\{ \begin{array}{l} 19 \\ 23 \\ 16 \\ 21 \end{array} \right.$                  | $\left\{ \begin{array}{l} 84.7 \\ 83.0 \\ 86.0 \\ 87.2 \end{array} \right.$ | $\left\{ \begin{array}{l} 84.7 \\ 84.7 \\ 84.9 \\ 84.6 \end{array} \right.$ | $\left\{ \begin{array}{l} \\ 84.75 \\ \\ \end{array} \right.$ | 0.9763                                 |

As will be seen, the results differ by a few thousandths. Regarding the management of the chronometer, it will be understood that it was difficult to avoid errors of  $\frac{1}{4}$  second which correspond to a relative error of three thousandths in a duration of about 80 seconds.

In calculating the discharge, I adopted the mean coefficient 0.9750, which is perhaps a little high. It is astonishing that the coefficient of discharge reached a value so close to unity; but that was the result of the experiments, and it was necessary to take the coefficient obtained.

I regret very much that I did not replace the 350-litre barrel by a much larger tank, say of 3 or 4 cubic metres capacity, so that the discharge could have been measured for some ten minutes. I would then have

obtained an approximation certainly to one one-thousandth.

**13. Results of the Experiments.**—Three convergent nozzles were tested successively, and then an orifice in a thin plate. The nozzles and the orifice, which were of bronze, are represented to scale in Plate II. The convergent nozzles had, as I have already said, a diameter at the mouth of 10.49 millimetres, 15.19 millimetres, and 24.20 millimetres, respectively, at 15° C. The thin-plate orifice had a diameter of 20.12 millimetres at 15° C. These diameters were measured with great precision to 0.01 millimetre, and the orifices were previously corrected by passing calibrated mandrels through them so as to render them as perfectly circular as possible.

The results of the experiments and the calculations are given in the tables attached to this paper. The experiments are numbered 1 to 152; eleven have not been transcribed because they appear to me to contain very large accidental errors. These are numbered 9, 38, 56, 57, 58, 61, 82, 83, 84, 91, and 92; number 47 may also be omitted.

The first column of the tables gives the number of the experiment. Columns 2 and 3 are the absolute initial and back pressures. These figures are corrected from the observed readings and represent the true values. For example, a small quantity, about 0.01 kilogramme, due to the velocity of the steam in the supply-pipe, has been added to the initial pressure as indicated by the gauge. The gauge reading is due to

the static pressure only, while the true initial pressure on the nozzle is the sum of the dynamic pressure and the static pressure.

Column 5 gives the head  $H$  on the axis of the water-nozzle,<sup>1</sup> and the figures correspond to the temperature of the water flowing through the nozzle.

Columns 6 and 7 indicate the temperatures  $t_0$  and  $t_1$  before and after the ejector condenser. As I have explained above, these are reduced to the readings of the air-thermometer. The difference between these figures gives the rise in temperature  $t_1 - t_0$  of the water (column 8)."

The volume of water discharged was obtained by the formula

$$Q = KS\sqrt{2gH}, \quad . \quad . \quad . \quad . \quad (11)$$

where  $Q$  = cubic centimetres per second,

$S$  = area of the nozzle in square centimetres,

$K$  = coefficient of discharge = 0.975,

$H$  = head in centimetres.

The area  $S$  of the nozzle is corrected for expansion at the temperature of the current of hot water. The weight discharged in kilogrammes per second is written in column 9.

The quantity of steam flowing per second is then calculated by means of the total discharge of water and from the temperatures  $t_0$  and  $t_1$ . Calling  $\lambda$  the total heat of the steam above 0° C., and  $C$  the mean

---

<sup>1</sup> This was a brass nozzle.

specific heat of the water between the temperatures  $t_0$  and  $t_1$ ,  $X$  the weight of steam discharged per second by the nozzle, and  $Q - X$  the quantity of injection water supplied to the condenser, the water resulting from the condensation of the steam being at the temperature  $t_1$ , then the quantity of heat given up by the steam <sup>1</sup>  $H = X(\lambda - Ct_1)$ , while the quantity of water  $Q - X$  is heated from  $t_0$  to  $t_1$  and absorbs  $(Q - X)C(t_1 - t_0)$  heat units. We have then the following equation:

$$X(\lambda - Ct_1) = (Q - X)C(t_1 - t_0),$$

whence

$$X = Q \frac{C\theta}{\lambda - Ct_0}, \quad \text{. . . . .} \quad (12)$$

where  $\theta = t_1 - t_0$ .

The quantity of heat  $\lambda$  is given by the formula or by Regnault's Tables, and the specific heat  $C$  of the water is given by the well-known expression

$$C = 1 + 0.4 \frac{t}{10^3} - 0.9 \frac{t^2}{10^6}.$$

The steam discharged, calculated in this manner, expressed in grammes per second, is given in column 10 of the tables.

Dividing by the area of the nozzle, we have the discharge per square centimetre in column 11.

---

<sup>1</sup> During the expansion of the steam in the nozzle a certain quantity of heat is transformed into mechanical energy, but this quantity is immediately and entirely given back again by the destruction of the kinetic energy of the jet, so that it is quite correct to take  $X(\lambda - Ct_1)$  as the quantity of heat given up by the steam.

A remark is necessary here. What value should be taken for the area of a nozzle? The diameter I have given is measured cold ( $15^{\circ}\text{C.}$ ), while under the action of the current of steam the nozzle becomes heated and expands. It is impossible to know exactly what to take for the temperature of the walls, because the current of steam has a varying pressure and also a varying temperature during its passage through the nozzle; and further, the walls are subjected to different temperatures at different points. It seems to me to be useless to try to calculate the true temperature of the nozzle in each experiment.

I adopted finally a mean temperature of  $120^{\circ}\text{C.}$  and based the calculations on the diameters corresponding to this temperature. This is one of the difficulties of these researches on the flow of steam and also on the flow of gases. To eliminate this cause of error entirely, it would be advantageous to employ metals having a very small coefficient of expansion, such as the new alloys of iron and nickel. When my experiments were made, however, these alloys were not yet known. It is unnecessary to give too much importance to this cause of error. The variation of temperature of the nozzle did not differ by more than about  $40^{\circ}\text{C.}$  from the mean temperature adopted ( $120^{\circ}\text{C.}$ ), and for bronze  $40^{\circ}$  corresponds to a linear expansion of one in fifteen hundred, so that the error in the area did not exceed 1 in 750, or but little more than one tenth of one per cent.

Finally, the last column of the table gives the ratio of the discharge of steam  $W$  to the initial pressure  $P$

when  $p$  is less than  $0.58P$ ; or the ratio of the actual discharge  $W$  to the maximum discharge  $W_m$  when the ratio  $\frac{p}{P}$  is greater than 0.58. These two cases are always distinguished in the tables, because in the first case the discharge depends on the initial pressure  $P$  which is constant (as is  $p$ ), while in the second case it depends on the back pressure also.

We will now examine the results of the experiments and compare them with those given by theory.

**14. Convergent Nozzles.**—The ratio  $\frac{W}{P}$  varies but slightly. It oscillates about the value 15. A very clear chart can be made by plotting as ordinates the value of this ratio, as is done on Plate II, where I have taken as abscissæ the logarithm of the initial pressure. This graphic representation is very satisfactory because the origin of the coordinates is a long way off the paper, so that variations of only 1 per cent correspond to a relatively large height. To give an idea of the amplification of the ordinates, I have drawn the lines  $ab$  and  $a'b'$  corresponding to a difference of 1 per cent above and below the theoretical line  $AB$ . It will be seen that the majority of the points lie above the theoretic line  $AB$ . Only a few points are more than 2 per cent away from this line. If the mean distance of the experimental points from the theoretical curve be taken for each nozzle, the following results are found:

For the nozzle 10.49 millimetres diameter (21

experiments) the mean departure is 1.17 per cent high.

For the nozzle 15.19 millimetres diameter (19 experiments) the mean departure is 0.69 per cent high.

For the nozzle 24.20 millimetres diameter (19 experiments) the mean departure is 0.25 per cent high.

These are very small differences and clearly show the satisfactory agreement between the experiments and theory.

If the curve for the mean results of the experiments be plotted, it will be seen that it follows the direction of the theoretical curve closely, but is a few thousandths above it. This difference between experiment and theory can be accounted for by several causes.

First of all, in the theoretical calculations I have taken the mechanical equivalent of the calorie as 425. This is a little low, as is now recognized. Now  $E^{\frac{1}{2}}$  enters into the expression for the speed of the steam. If 428 be taken instead of 425, the figures for the theoretical discharge will be increased by 0.35 per cent, and the mean difference between experiment and theory will not be more than 0.35 per cent.

Further, we have seen that the calibration of the water-nozzle was not as accurate as could have been wished; perhaps a certain error is to be feared there. I do not believe that it exceeds 0.3 per cent.

Finally there was a displacement of the zero of the thermometer measuring the temperature of the hot water. This is certainly the most important source of error. I stated above that I was led to modify the

first standardization by  $0.15^{\circ}$  after having carefully observed the variations of the thermometer. Nevertheless it may be that the mean position of the zero during the experiments was slightly different from that which I finally adopted. An error of less than one tenth of a degree would be sufficient to account for the remaining error of 0.35 per cent.

I have indicated on the chart the points corresponding to the old experiments by Minary and Résal. These points are surrounded by a triangle; one of them has not been plotted, as it is outside the limits of the figure. It appears that these experiments gave very much larger results than ours, which is explained, as I have already remarked, by the method employed not allowing of a correction being made for the effect of the entrained moisture. The error reaches 5.2 per cent and averages 2.5 per cent.

Similarly Rosenhain's experiments on nozzle No. 4 give an error reaching 3 to 4 per cent.

We shall see shortly in analyzing Hirn's experiments on the flow of air that he had the same trouble with that fluid.

Thus there is a satisfactory agreement between experiment and theory, but the experimental discharge appears to be a little larger than what we should expect from theory.

Should the theoretical formula be followed in practice, or should we adopt the coefficients given by the preceding experiments? If it be desired to use the theoretical formula, the coefficient must be taken as 15.20

for  $E=425$ , or 15.25 for  $E=428$ ; and if it be desired to follow experiment, a value of 15.32 at most should be taken for the coefficient. The practical formula then will be

$$\frac{W}{P} = 15.20 \text{ to } 15.32 - 0.96 \log P, \quad . \quad . \quad (13)$$

within the limits of our experiments; that is to say, between  $P=1$  and  $P=12$  kg. per square centimetre.

In my report to the Congrès de Mécanique Appliquée I gave 15.42, which resulted from a summary glance over the experiments, as the first term of the second member of this equation, and for the second term  $-\log P$ . At the International Congress in Glasgow I suggested the value 15.20 resulting from the theoretical formula in which  $E$  is taken as 425. These are the limiting values of this term. I estimate that the most probable actual value is 15.26 with a possible error less than 0.4 per cent. This is exactly the coefficient in Grashof's formula which was deduced from theory by the first method given on page 15. Grashof's formula, however, gives a too rapid decrease for the ratio  $\frac{W}{P}$ , as will be seen from the figure on Plate II, where the line  $CD$  corresponds to this formula.

The value of the coefficient of  $\log P$  is between 0.96 and unity. At first I always took unity because of the simplification which results; nevertheless it is better to take 0.96, which is probably more exact because it is given by the thermodynamic calculation.

**15. Remarks.**—The agreement between experiment and theory to less than 1 per cent leads to the conclusion that, contrary to the opinion sometimes stated, there is no sensible retardation in the condensation of the steam. In fact the calculation takes into account the condensation during the expansion, and the proportion of steam condensed when the pressure has become equal to  $0.58P$  is about 0.3 to 0.36 per cent, depending on the value of  $P$ . Now if any retardation in the condensation occurred, experiment would reveal a deficit amounting to 0.3 per cent to 0.35 per cent in the quantity of steam discharged. But in place of a deficit, a too high value is always found so that it may be concluded that if there is any retardation of the condensation it is very small, of the order of 0.00001 of a second.

On the other hand it will be seen also that the coefficient of discharge for convergent nozzles of the form tested by me is very close to unity for values of  $p$  less than  $0.58P$ , since the experimental discharge is always found to be larger than the theoretical. A similar conclusion results from Hirn's experiments on air. When  $p$  is greater than  $0.58P$  this is not the case, however.

Finally, if, conversely, we suppose *a priori* that the coefficient of discharge is unity, then the value of  $E$ , the mechanical equivalent of the calorie which will make the experimental discharge equal to the theoretical, is found to be 431, which differs by 0.7 per cent only from the value 428 generally adopted.

**16. Experiments with  $p$  larger than  $0.58P$ .** — When the back pressure is larger than  $0.58P$  the flow depends not only on the initial pressure  $P$ , but also on the back pressure  $p$ . The results can be best represented by taking the ratio of the actual discharge  $W$  to the maximum discharge  $W_m$ , which occurs when the back pressure is less than  $0.58P$ . This ratio  $\frac{W}{W_m}$  is then practically independent of the ratio  $\frac{p}{P}$  of the pressures. The points can be plotted on cross-section paper and the curve of  $\frac{W}{W_m}$  as a function of  $\frac{p}{P}$  constructed.

For the experiments where  $p$  was larger than  $0.58P$  the tables give, in column 12, the theoretical maximum discharge  $W_m$  calculated by the formula given above:

$$W_m = P(15.26 - 0.96 \log P), \quad . \quad . \quad . \quad (14)$$

and in column 13 the ratio  $\frac{W}{W_m}$ .

The results of these experiments have been plotted in this manner on Plate III, the results for each of the three convergent nozzles experimented on being differently indicated.

It will be seen that the points fall very well on a curve of the elliptic form, as was pointed out by M. H. Parenty.<sup>1</sup> As I have remarked above, the larger de-

---

<sup>1</sup> Annales de Chimie et de Physique, May 1896.

partures from this curve may be considered as being due to the great uncertainty that sometimes occurred in measuring the difference of the pressures by the mercury manometer when the column of water surmounting the column of mercury was interrupted by bubbles of air. The standard gauges also gave but a poor approximation at low pressures. It will be noticed further that the greatest differences occur in the results for the largest nozzle, 24.20 millimetres in diameter. The results given by the small nozzle are much more regular.

To compare the results obtained with theory the curve *AB*, based on the thermodynamic calculation, has been drawn. This curve is easily obtained by taking the ratios of the function  $\frac{DV}{x}$  defined on page 9 to the maximum value of this function. It is simply necessary to take the reciprocal of the ratios of the numbers in column 8 of the table on page 11 to the smallest of these numbers, 0.70276.

It will be noticed that the experimental curve lies a little below the theoretical curve, as would be expected, and that it becomes horizontal a little later than the theoretical curve, which means that the maximum experimental discharge is not attained until the back pressure is lower than  $0.58P$ . By taking the ratio between the ordinates of the experimental and theoretical curves the coefficient of discharge for the converging nozzles is obtained, from which it will be seen that this coefficient starts with a value about 0.94

when the ratio of the pressures is in the neighborhood of unity and gradually increases towards the value unity. As the experimental curve and also the theoretical curve are very nearly ellipses, the ratio  $\frac{W}{W_m}$  as a function of the ratio  $\frac{p}{P}$  of the pressures can be expressed by a very simple formula, but it does not seem worth while to go into this.

We shall see that the curves for air are also very nearly quadrants of an ellipse.

**17. Orifice in a Thin Plate.**—The orifice in a thin plate does not behave in the same way as the convergent nozzles. The discharge does not reach a maximum for  $p$  equal to or a little less than  $0.58P$ , but increases constantly as  $p$  falls.

The experimental figures are given in the tables either with the ratio  $\frac{W}{P}$  or, which is better, the ratio  $\frac{W}{W_m}$ .

The results relating to this orifice are also plotted graphically on Plate III up to the value of  $\frac{p}{P}$  equal to 0.4. It will be noticed that the points fall very regularly on a curve  $EF$  which is always rising. If the ratio between the ordinates of this curve to those of the theoretical curve  $AB$  be taken, it will be seen that the coefficient of discharge for the thin-plate orifice starts at a value of 0.61 for small differences of pressure and increases

very regularly to the value 0.87 which is reached for very small back pressures. But the curve of this coefficient of discharge as a function of the ratio  $\frac{p}{P}$  is not at all a straight line. It shows a slight depression around  $\frac{p}{P} = 0.7$ . On the contrary, if the ratio of the ordinates of the curve for the thin-plate orifice be taken to those of the experimental curve  $CD$  for convergent nozzles instead of to the theoretical curve, it is found that the ratio increases in a straight line. On Plate III points representing this ratio for certain values of  $\frac{p}{P}$  are marked. It will be seen that these points be very nearly on a straight line  $GH$ , which of course is tangent to the thin-plate orifice curve at the point  $A$ , which is on the ordinate of the point where the curve  $CD$  becomes horizontal.

#### COMPARISON WITH THE RESULTS OF HIRN'S EXPERIMENTS ON AIR.

In 1885, Hirn made some very precise experiments on the flow of air through nozzles and orifices in thin plates. It is interesting to compare his results with those of our experiments on steam. Hirn used the direct method. After passing through a holder the air was caused to flow into a receptacle in which a vacuum had previously been formed. By a certain method of registering he measured the fall of the holder at equal intervals of time, as well as the initial and discharge pressures.

On analyzing his numerical results, given in the *Annales de Chimie et de Physique*, March 1886, it will be noted, first of all, that Hirn did not take into account in his calculations the slight contraction of the orifice occasioned by the lowering of the temperature due to the expansion of the air. It is easy to make the correction, however. Again, it appears to me to be wrong to dry the air after it left the holder and before passing the nozzle, because dry air was flowing through the nozzle, while the gas-holder measured humid air. As the volumetric discharge of gases (referred to the initial pressure and temperature) is the same for all gases at the same temperature, and that of the vapor could not differ very much, it would have been better, in my opinion, if he had not dried the air. The resulting error would only have been a fraction of the proportion of water vapor. What is the error to be expected from this cause in Hirn's experiments? At  $10^{\circ}\text{C.}$ , the mean temperature during the experiments, the vapor pressure of water is 0.0125 kilogramme per square centimeter, and its density is equal to 0.00195. The error due to this cause would increase the results by about 2 per cent. Hirn's experiments were made on two convergent nozzles, one having  $9^{\circ}$  and the other  $13^{\circ}$  convergence; also on a conico-cylindrical nozzle, and on two thin-plate orifices. The experiments on the nozzles clearly showed that the discharge becomes a maximum when the back pressure falls slightly below the theoretical figure for permanent gases ( $0.526P$ ). Taking the discharge per

unit area of the mouth of the orifice, we have the following figures: 19.80 litres per square centimetre per second for the  $9^\circ$  nozzle at the initial temperature of  $15.75^\circ \text{C.}$ ; 19.77 litres per square centimetre per second for the  $13^\circ$  nozzle, at the temperature of  $8^\circ \text{C.}$ ; 18.85 litres per square centimetre for the conico-cylindrical nozzle at the temperature of  $6.5^\circ \text{C.}$  The theoretical maximum discharge for these nozzles, calculated by the formula  $Q = 1.164T$ , where  $T$  is the absolute initial temperature and  $Q$  is expressed in litres per square centimetre per second, is respectively 19.77, 19.50, and 19.47 litres.

For the conico-cylindrical nozzle, then, the experimental discharge is less than the theoretical, which is to be expected because of the losses by friction in the cylindrical part. But for the convergent nozzles the experimental discharge is larger than the theoretical by about 0.75 per cent on the average. Here we have the same results that we have already observed for the vapor of water. It should be noted always that this exaggeration of the measured discharge could arise, as I have explained above, from Hirn's having dried the air.

I have plotted on Plate IV the experimental points, taking the ratio of the pressures as abscissæ and the ratio of the observed discharge to the maximum discharge as ordinates. I have also plotted a few theoretical points.

It will be seen that for the nozzle having a convergence of  $13^\circ$  and for the conico-cylindrical nozzle the experimental curve  $AB$  is very close to the theoretical curve except in the neighborhood of the maximum

discharge. But for the nozzle with  $9^\circ$  convergence the experimental curve  $CD$  departs considerably from the theoretical curve, particularly towards the origin. It would seem that there was some systematic error in the series of measurements relative to this nozzle.

The results obtained by the two thin-plate orifices lie very nicely along the curve  $EF$  on Plate IV. Taking the ratio between the ordinates of this curve and those of the curve  $AB$  for convergent nozzles, we find figures which increase along a straight line in the same way as was obtained in the case of steam. That is to say, the points representing these ratios which are plotted on the chart lie very exactly on a straight line  $GH$  tangent to the curve  $EF$  for the thin-plate orifice. The origin of this line is 0.629, while Hirn found by direct experiment that for small differences of pressures the coefficient of discharge for thin-plate orifices was 0.633.

Comparing the curves thus obtained for the flow of air with those obtained for the flow of steam, it will be noticed that they are entirely analogous and can be almost superposed. There is always this difference, that the theoretical maximum of the curves for air occurs at  $\frac{p}{P} = 0.526$ , while for steam it occurs at  $\frac{p}{P} = 0.58$ . It will be noticed also that the straight line which represents the ratio of the coefficient of discharge for thin-plate orifices to that for convergent nozzles for steam lies about 2 per cent above the corresponding line for air. I am unable to decide whether this difference is due to experimental errors or to the different nature of the fluids.

1.—January 30, 1896. Outside temperature 16° C. Barometer 736 mm. = 0.997 kg. Convergent nozzle B.  
Diam. 15.9 mm. Area at 120° C.: 1.819 sq. cm.

| No. | Absolute Pressures.                         |                                           | Ratio,<br>$\frac{p}{P}$ | Head,<br>$H$<br>Milli-<br>metres. | Temperatures.           |                        | Rise of<br>Tempera-<br>ture,<br>$t_1 - t_0$ | Total<br>Water<br>Discharged,<br>kgs/sec | Steam Discharged.      |                                                  | Ratio,<br>$\frac{W}{P}$ |
|-----|---------------------------------------------|-------------------------------------------|-------------------------|-----------------------------------|-------------------------|------------------------|---------------------------------------------|------------------------------------------|------------------------|--------------------------------------------------|-------------------------|
|     | Initial,<br>$P$<br>kgs/cm <sup>2</sup><br>2 | Final,<br>$p$<br>kgs/cm <sup>2</sup><br>3 |                         |                                   | Entering,<br>$t_0$<br>6 | Leaving,<br>$t_1$<br>7 |                                             |                                          | Total,<br>gr/sec<br>10 | Per<br>sq. cm.,<br>$\frac{W}{P}$<br>gr/sec<br>11 |                         |
| 1   | 9.26                                        | 0.144                                     | 0.0155                  | 553                               | 5.40                    | 50.50                  | 45.10                                       | 3.491                                    | 240.97                 | 132.48                                           | 14.311                  |
| 2   | 8.53                                        | 0.157                                     | 0.0184                  | 589                               | 5.50                    | 46.05                  | 40.55                                       | 3.609                                    | 224.37                 | 123.36                                           | 14.467                  |
| 3   | 8.43                                        | 0.144                                     | 0.0171                  | 582                               | 5.40                    | 45.65                  | 40.25                                       | 3.599                                    | 222.05                 | 122.08                                           | 14.487                  |
| 4   | 7.49                                        | 0.144                                     | 0.0192                  | 590                               | 5.50                    | 41.05                  | 35.55                                       | 3.620                                    | 197.72                 | 108.69                                           | 14.520                  |
| 5   | 6.68                                        | 0.144                                     | 0.0216                  | 591.5                             | 5.50                    | 37.40                  | 31.90                                       | 3.629                                    | 178.20                 | 97.97                                            | 14.678                  |
| 6   | 5.52                                        | 0.103                                     | 0.0187                  | 584.5                             | 6.82                    | 33.35                  | 26.53                                       | 3.611                                    | 148.27                 | 81.51                                            | 14.786                  |
| 7   | 4.48                                        | 0.0895                                    | 0.0200                  | 575.5                             | 6.72                    | 28.60                  | 21.88                                       | 3.588                                    | 121.50                 | 67.01                                            | 14.902                  |
| 8   | 3.64                                        | 0.103                                     | 0.0283                  | 579                               | 6.07                    | 23.65                  | 17.58                                       | 3.604                                    | 98.61                  | 54.22                                            | 14.890                  |
| 10  | 4.14                                        | 0.166                                     | 0.2816                  | 473                               | 5.67                    | 27.65                  | 21.98                                       | 3.253                                    | 111.02                 | 61.03                                            | 14.737                  |
| 11  | 4.10                                        | 1.945                                     | 0.4744                  | 426                               | 5.59                    | 28.50                  | 22.91                                       | 3.087                                    | 109.79                 | 60.19                                            | 14.717                  |

## FLOW OF STEAM

3.—February 4, 1896. Outside temperature 16° C. Barometer 734 mm. = 0.996 kg. Convergent nozzle C.  
 Diam. 24.20 mm. Area at 120° C.: 4.6176 sq. cm.

| No. | Absolute Pressures.                |                                  | Ratio, $\frac{p}{P}$ | Head, $H$ metres. | Temperatures.   |                | Rise of Temperature, $t_1 = t_0$ | Total Water Discharged, kgs/sec | Steam Discharged. |                      | Ratio $\frac{W}{P}$ |
|-----|------------------------------------|----------------------------------|----------------------|-------------------|-----------------|----------------|----------------------------------|---------------------------------|-------------------|----------------------|---------------------|
|     | Initial, $P_2$ kgs/cm <sup>2</sup> | Final, $P_3$ kgs/cm <sup>2</sup> |                      |                   | Entering, $t_0$ | Leaving, $t_1$ |                                  |                                 | Total, gr/sec     | Per, sq. cm., gr/sec |                     |
| 1   |                                    |                                  | 4                    | 5                 | 6               | 7              | 8                                | 9                               | 10                | 11                   | 12                  |
| 25  | 2.44                               | 0.154                            | 0.0631               | 564               | 11.25           | 41.31          | 30.06                            | 3.538                           | 168.05            | 36.395               | 14.92               |
| 26  | 1.99                               | 0.133                            | 0.0668               | 560               | 10.85           | 35.80          | 24.95                            | 3.532                           | 139.59            | 30.229               | 15.19               |
| 27  | 1.53                               | 0.108                            | 0.0706               | 564               | 10.65           | 29.73          | 19.08                            | 3.551                           | 107.69            | 23.319               | 15.24               |
| 28  | 1.15                               | 0.127                            | 0.1103               | 551               | 10.40           | 24.78          | 14.38                            | 3.514                           | 80.63             | 17.461               | 15.19               |
| 29  | 1.22                               | 0.122                            | 0.1000               | 578               | 6.90            | 22.10          | 15.20                            | 3.601                           | 86.76             | 18.788               | 15.40               |
| 30  | 1.80                               | 0.198                            | 0.1100               | 572               | 6.77            | 29.10          | 22.33                            | 3.577                           | 123.86            | 27.256               | 15.14               |
| 31  | 2.93                               | 0.171                            | 0.0584               | 574.5             | 6.57            | 42.38          | 35.81                            | 3.570                           | 199.99            | 43.311               | 14.78               |
| 32  | 3.57                               | 0.184                            | 0.0516               | 550.5             | 6.47            | 50.98          | 44.51                            | 3.482                           | 241.64            | 53.352               | 14.66               |
| 33  | 4.03                               | 0.235                            | 0.0547               | 570.5             | 6.12            | 55.02          | 48.90                            | 3.537                           | 269.21            | 58.298               | 14.46               |
| 34  | 1.00                               | 0.355                            | 0.3550               | 558.5             | 6.07            | 18.52          | 12.55                            | 3.542                           | 70.20             | 15.206               | 15.21               |
| 35  | 3.05                               | 1.462                            | 0.4800               | 391               | 5.70            | 50.52          | 44.82                            | 2.935                           | 205.86            | 44.579               | 14.61               |
| 36  | 2.97                               | 0.964                            | 0.3223               | 452               | 5.77            | 46.62          | 40.85                            | 3.160                           | 202.05            | 43.757               | 14.73               |
| 37. | 2.95                               | 1.685                            | 0.5710               | 364               | 5.62            | 50.21          | 44.59                            | 2.833                           | 198.77            | 43.047               | 14.59               |

5.—February 20, 1896. Outside temperature 19° C. Barometer 732 mm. = 0.991 kg. Convergent nozzle A.  
 Diam. 10.49 mm. Area at 120° C.: 0.8686 sq. cm.

| No. | Absolute Pressures.                    |                                      | Ratio,<br>$\frac{p}{P}$ | Head,<br>$H$<br>Milli-<br>metres. | Temperatures.      |                   | Rise of<br>Tempera-<br>ture,<br>$t_1 - t_0$ | Total<br>Water<br>Dis-<br>charged,<br>kgs/sec | Steam Discharged. |                                            | Ratio,<br>$\frac{W}{P}$ |
|-----|----------------------------------------|--------------------------------------|-------------------------|-----------------------------------|--------------------|-------------------|---------------------------------------------|-----------------------------------------------|-------------------|--------------------------------------------|-------------------------|
|     | Initial,<br>$P$<br>kgs/cm <sup>2</sup> | Final,<br>$p$<br>kgs/cm <sup>2</sup> |                         |                                   | Entering,<br>$t_0$ | Leaving,<br>$t_1$ |                                             |                                               | Total,<br>gr/sec  | Per<br>sq. cm.,<br>$\frac{W}{P}$<br>gr/sec |                         |
| 1   | 2                                      | 3                                    | 4                       | 5                                 | 6                  | 7                 | 8                                           | 9                                             | 10                | 11                                         | 12                      |
| 79  | 9.16                                   | 0.231                                | 0.0252                  | 583                               | 7.77               | 28.61             | 20.84                                       | 3.612                                         | 115.57            | 133.34                                     | 14.522                  |
| 80  | 8.42                                   | 0.201                                | 0.0239                  | 581.7                             | 8.21               | 27.43             | 19.22                                       | 3.608                                         | 106.78            | 122.73                                     | 14.583                  |
| 81  | 7.76                                   | 0.191                                | 0.0246                  | 572.6                             | 8.46               | 26.35             | 17.89                                       | 3.581                                         | 98.74             | 113.68                                     | 14.653                  |
| 85  | 10.74                                  | 0.151                                | 0.0140                  | 599                               | 6.42               | 30.37             | 23.95                                       | 3.659                                         | 133.82            | 154.06                                     | 14.339                  |
| 86  | 10.41                                  | 0.151                                | 0.0145                  | 594                               | 6.49               | 29.88             | 23.39                                       | 3.644                                         | 130.25            | 149.96                                     | 14.401                  |
| 87  | 9.98                                   | 0.151                                | 0.0151                  | 589.5                             | 6.71               | 29.20             | 22.49                                       | 3.631                                         | 124.93            | 143.83                                     | 14.407                  |
| 88  | 9.48                                   | 0.141                                | 0.0149                  | 586.5                             | 6.82               | 28.31             | 21.49                                       | 3.622                                         | 119.23            | 137.27                                     | 14.475                  |
| 89  | 8.99                                   | 0.141                                | 0.0157                  | 583.3                             | 6.71               | 27.26             | 20.55                                       | 3.613                                         | 113.83            | 131.05                                     | 14.572                  |
| 90  | 8.46                                   | 0.131                                | 0.0155                  | 567                               | 6.62               | 26.21             | 19.59                                       | 3.563                                         | 107.11            | 123.32                                     | 14.572                  |
| 93  | 11.34                                  | 0.191                                | 0.0168                  | 565.5                             | 6.19               | 31.81             | 25.62                                       | 3.554                                         | 138.84            | 159.84                                     | 14.098                  |
| 94  | 11.42                                  | 0.191                                | 0.0167                  | 580.5                             | 6.26               | 32.05             | 25.79                                       | 3.600                                         | 141.58            | 163.00                                     | 14.268                  |
| 95  | 11.44                                  | 0.191                                | 0.0167                  | 580.5                             | 6.29               | 32.25             | 25.96                                       | 3.600                                         | 142.51            | 164.07                                     | 14.338                  |
| 96  | 11.14                                  | 0.151                                | 0.0136                  | 574.5                             | 6.27               | 31.56             | 25.29                                       | 3.582                                         | 138.21            | 159.12                                     | 14.339                  |
| 97  | 10.46                                  | 0.151                                | 0.0144                  | 576.5                             | 6.27               | 30.43             | 24.16                                       | 3.589                                         | 132.46            | 152.50                                     | 14.574                  |
| 98  | 11.84                                  | 0.151                                | 0.0128                  | 570                               | 6.24               | 33.30             | 27.06                                       | 3.566                                         | 147.04            | 169.29                                     | 14.294                  |
| 99  | 11.54                                  | 0.151                                | 0.0131                  | 565                               | 6.12               | 33.05             | 26.93                                       | 3.551                                         | 145.75            | 167.81                                     | 14.536                  |

## FLOW OF STEAM

6.—March 10, 1896. Outside temperature 20° C. Barometer 732 mm. = 0.992 kg. Convergent nozzle A.  
 Diam. 10.49 mm. Area at 120° C.: 0.6886 sq. cm.

| No. | Absolute Pressures.                    |                                      | Ratio,<br>$\frac{p}{P}$ | Head,<br>$H$<br>Milli-<br>metres. | Temperatures.      |                   | Rise of<br>Tempera-<br>ture,<br>$t_1 - t_0$ | Total<br>Water<br>Dis-<br>charged,<br>kgs/sec | Steam Discharged, |                                            | Ratio,<br>$\frac{W}{P}$ |
|-----|----------------------------------------|--------------------------------------|-------------------------|-----------------------------------|--------------------|-------------------|---------------------------------------------|-----------------------------------------------|-------------------|--------------------------------------------|-------------------------|
|     | Initial,<br>$P$<br>kgs/cm <sup>2</sup> | Final,<br>$p$<br>kgs/cm <sup>2</sup> |                         |                                   | Entering,<br>$t_0$ | Leaving,<br>$t_1$ |                                             |                                               | Total,<br>gr/sec  | Per<br>sq. cm.,<br>$\frac{W}{P}$<br>gr/sec |                         |
| 1   | 2                                      | 3                                    | 4                       | 5                                 | 6                  | 7                 | 8                                           | 9                                             | 10                | 11                                         | 12                      |
| 100 | 10.74                                  | 4.89                                 | 0.4553                  | 352.5                             | 5.92               | 37.00             | 31.08                                       | 2.801                                         | 132.86            | 152.96                                     | 14.236                  |
| 101 | 10.54                                  | 5.24                                 | 0.4767                  | 353.5                             | 5.97               | 36.55             | 30.58                                       | 2.805                                         | 130.98            | 150.80                                     | 14.30                   |
| 102 | 10.49                                  | 5.49                                 | 0.5234                  | 353.5                             | 5.97               | 36.50             | 30.53                                       | 2.805                                         | 130.78            | 150.56                                     | 14.35                   |
| 103 | 10.46                                  | 5.74                                 | 0.5488                  | 352.5                             | 5.97               | 36.45             | 30.48                                       | 2.801                                         | 130.39            | 150.12                                     | 14.34                   |
| 104 | 10.43                                  | 5.99                                 | 0.5744                  | 351.5                             | 5.97               | 36.35             | 30.38                                       | 2.797                                         | 129.79            | 149.43                                     | 14.32                   |

4.—February 5, 1896. Outside temperature 17° C. Barometer 735 mm. = 0.996 kg. Convergent nozzle C.  
 Diam. 24.20 mm. Area at 120° C.: 4.6176 sq. cm.

| No. | Absolute Pressures.                    |                                      | Ratio,<br>$\frac{p}{P}$ | Head,<br>$H$<br>Milli-<br>metres. | Temperatures.      |                   | Rise of<br>Tempera-<br>ture,<br>$t_1 - t_0$ | Total<br>Water<br>Dis-<br>charged,<br>kgs/sec | Steam Discharged. |                                            | Ratio,<br>$\frac{W}{P}$ |
|-----|----------------------------------------|--------------------------------------|-------------------------|-----------------------------------|--------------------|-------------------|---------------------------------------------|-----------------------------------------------|-------------------|--------------------------------------------|-------------------------|
|     | Initial,<br>$P$<br>kgs/cm <sup>2</sup> | Final,<br>$p$<br>kgs/cm <sup>2</sup> |                         |                                   | Entering,<br>$t_0$ | Leaving,<br>$t_1$ |                                             |                                               | Total,<br>gr/sec  | Per<br>sq. cm.,<br>$\frac{W}{P}$<br>gr/sec |                         |
| 1   | 2                                      | 3                                    | 4                       | 5                                 | 6                  | 7                 | 8                                           | 9                                             | 10                | 11                                         | 12                      |
| 55  | 1.19                                   | 0.644                                | 0.5412                  | 522                               | 6.37               | 21.70             | 15.33                                       | 3.423                                         | 82.48             | 17.985                                     | 15.11                   |
| 62  | 1.58                                   | 0.646                                | 0.4089                  | 532                               | 5.47               | 25.62             | 20.15                                       | 3.452                                         | 109.47            | 23.784                                     | 15.03                   |
| 63  | 1.59                                   | 0.713                                | 0.4485                  | 519                               | 5.47               | 25.97             | 20.50                                       | 3.409                                         | 109.48            | 23.887                                     | 15.03                   |
| 64  | 1.60                                   | 0.796                                | 0.4975                  | 505                               | 5.47               | 26.55             | 21.08                                       | 3.362                                         | 111.65            | 24.191                                     | 15.13                   |
| 65  | 1.63                                   | 0.887                                | 0.5442                  | 490                               | 5.49               | 26.96             | 21.47                                       | 3.311                                         | 111.52            | 24.293                                     | 14.89                   |
| 67  | 1.64                                   | 0.717                                | 0.4372                  | 503                               | 5.47               | 27.08             | 21.61                                       | 3.355                                         | 114.18            | 24.788                                     | 15.10                   |

## FLOW OF STEAM

7.—March 12, 1896. Outside temperature 21° C. Barometer 729 mm. = 0.988 kg. Thin-plate orifice D.  
 Diam. 20.12 mm. Area at 120° C. = 3.1918 sq. cm.

| No. | Absolute Pressures.                    |                                      | Ratio,<br>$\frac{p}{P}$ | Head,<br>$H$<br>Milli-<br>metres. | Temperatures.      |                   | Rise of<br>Tempera-<br>ture,<br>$t_1 - t_0$ | Total<br>Water<br>Dis-<br>charged,<br>kgs/sec | Steam Discharged. |                                            | Ratio,<br>$\frac{W}{P}$ |
|-----|----------------------------------------|--------------------------------------|-------------------------|-----------------------------------|--------------------|-------------------|---------------------------------------------|-----------------------------------------------|-------------------|--------------------------------------------|-------------------------|
|     | Initial,<br>$P$<br>kgs/cm <sup>2</sup> | Final,<br>$p$<br>kgs/cm <sup>2</sup> |                         |                                   | Entering,<br>$t_0$ | Leaving,<br>$t_1$ |                                             |                                               | Total,<br>gr/sec. | Per<br>sq. cm.,<br>$\frac{W}{P}$<br>gr/sec |                         |
| 1   | 2                                      | 3                                    | 4                       | 5                                 | 6                  | 7                 | 8                                           | 9                                             | 10                | 11                                         | 12                      |
| 117 | 4.04                                   | 1.820                                | 0.4505                  | 577                               | 6.22               | 35.95             | 29.73                                       | 3.585                                         | 165.63            | 51.024                                     | 12.85                   |
| 118 | 4.02                                   | 1.534                                | 0.3816                  | 548                               | 6.12               | 36.35             | 30.23                                       | 3.493                                         | 164.20            | 51.444                                     | 12.80                   |
| 119 | 3.96                                   | 1.236                                | 0.3121                  | 489                               | 6.04               | 37.55             | 31.51                                       | 3.298                                         | 161.63            | 50.640                                     | 12.79                   |
| 120 | 3.86                                   | 0.993                                | 0.2573                  | 445                               | 6.02               | 38.27             | 32.25                                       | 3.145                                         | 157.83            | 49.448                                     | 12.82                   |
| 121 | 2.41                                   | 0.298                                | 0.1237                  | 571.3                             | 6.12               | 24.09             | 17.97                                       | 3.578                                         | 100.77            | 31.573                                     | 13.10                   |
| 122 | 2.54                                   | 0.728                                | 0.2866                  | 506.5                             | 6.12               | 25.87             | 19.05                                       | 3.368                                         | 104.12            | 32.626                                     | 12.85                   |
| 123 | 2.57                                   | 0.958                                | 0.3728                  | 482.5                             | 5.97               | 26.35             | 20.38                                       | 3.287                                         | 104.84            | 32.846                                     | 12.78                   |
| 124 | 2.61                                   | 1.148                                | 0.4398                  | 460.6                             | 6.12               | 26.80             | 20.68                                       | 3.211                                         | 103.94            | 32.566                                     | 12.48                   |
| 125 | 2.27                                   | 1.168                                | 0.5145                  | 464.2                             | 6.12               | 23.45             | 17.33                                       | 3.226                                         | 87.69             | 27.480                                     | 12.11                   |
| 126 | 2.36                                   | 1.378                                | 0.5839                  | 453.2                             | 6.12               | 23.45             | 17.33                                       | 3.187                                         | 86.58             | 27.130                                     | 11.50                   |

8.—March 13, 1896. Outside temperature 23° C. Barometer 727 mm. = 0.985 kg. Thin-plate orifice D.  
Diameter 20.12 mm. Area at 120° C.: 3.1918 sq. cm.

| No. | Absolute Pressures.       |                                      | Ratio,<br>$\frac{p}{P}$ | Head,<br>$H$<br>Milli-<br>metres. | Temperatures.      |                   | Rise of<br>Temper-<br>ature,<br>$t_1 - t_0$ | Total<br>Water<br>Dis-<br>charged,<br>kgs/sec | Steam Discharged. |                                            | Ratio,<br>$\frac{W}{P}$ |
|-----|---------------------------|--------------------------------------|-------------------------|-----------------------------------|--------------------|-------------------|---------------------------------------------|-----------------------------------------------|-------------------|--------------------------------------------|-------------------------|
|     | Initial,<br>$P$<br>kgs/cm | Final,<br>$p$<br>kgs/cm <sup>2</sup> |                         |                                   | Entering,<br>$t_0$ | Leaving,<br>$t_1$ |                                             |                                               | Total,<br>gr/sec  | Per<br>sq. cm.,<br>$\frac{W}{P}$<br>gr/sec |                         |
| 1   | 2                         | 3                                    | 4                       | 5                                 | 6                  | 7                 | 8                                           | 9                                             | 10                | 11                                         | 12                      |
| 129 | 4.135                     | 1.355                                | 0.3285                  | 428                               | 5.87               | 40.03             | 34.16                                       | 3.083                                         | 163.65            | 51.275                                     | 12.40                   |
| 130 | 4.135                     | 1.635                                | 0.3955                  | 396                               | 5.82               | 41.08             | 35.26                                       | 2.965                                         | 162.42            | 50.910                                     | 12.31                   |
| 131 | 3.835                     | 1.885                                | 0.4920                  | 387                               | 5.84               | 37.68             | 31.84                                       | 2.934                                         | 145.38            | 45.551                                     | 11.88                   |
| 132 | 3.805                     | 2.045                                | 0.5375                  | 377                               | 5.87               | 37.32             | 31.45                                       | 2.897                                         | 141.75            | 44.421                                     | 11.68                   |
| 133 | 2.985                     | 1.595                                | 0.5344                  | 421                               | 5.82               | 29.25             | 23.43                                       | 3.068                                         | 112.27            | 35.182                                     | 11.73                   |

## FLOW OF STEAM

9.—March 17, 1896. Outside temperature 16° C. Barometer 730 mm. = 0.989 kg. Convergent nozzle B.  
 Diameter 15.19 mm. Area at 120° C.: 1.819 sq. cm.

| No. | Absolute Pressures.                    |                                      | Ratio,<br>$\frac{P}{P}$ | Head,<br>$H$<br>Milli-<br>metres. | Temperatures.      |                   | Dise of<br>Temper-<br>ature,<br>$t_1 - t_0$ | Total<br>Water<br>Dis-<br>charged,<br>kgs/sec | Steam Discharged. |                                            | Ratio,<br>$\frac{W}{P}$ |
|-----|----------------------------------------|--------------------------------------|-------------------------|-----------------------------------|--------------------|-------------------|---------------------------------------------|-----------------------------------------------|-------------------|--------------------------------------------|-------------------------|
|     | Initial,<br>$P$<br>kgs/cm <sup>2</sup> | Final,<br>$P$<br>kgs/cm <sup>2</sup> |                         |                                   | Entering,<br>$t_0$ | Leaving,<br>$t_1$ |                                             |                                               | Total,<br>gr/sec  | Per<br>sq. cm.,<br>$\frac{W}{P}$<br>gr/sec |                         |
| 1   | 2                                      | 3                                    | 4                       | 5                                 | 6                  | 7                 | 8                                           | 9                                             | 10                | 11                                         | 12                      |
| 144 | 5.266                                  | 0.369                                | 0.0701                  | 585.2                             | 6.12               | 30.97             | 24.85                                       | 3.616                                         | 139.03            | 76.523                                     | 14.52                   |
| 145 | 3.893                                  | 0.369                                | 0.0948                  | 585                               | 6.12               | 24.50             | 18.38                                       | 3.621                                         | 103.50            | 56.896                                     | 14.61                   |
| 146 | 2.912                                  | 0.229                                | 0.0787                  | 571.5                             | 6.17               | 20.35             | 14.18                                       | 3.582                                         | 79.34             | 43.690                                     | 15.60                   |
| 147 | 5.395                                  | 0.249                                | 0.0462                  | 593.5                             | 5.97               | 31.13             | 25.16                                       | 3.642                                         | 141.67            | 77.881                                     | 14.44                   |
| 148 | 4.444                                  | 0.209                                | 0.0476                  | 583                               | 5.97               | 26.95             | 20.98                                       | 3.613                                         | 117.58            | 64.640                                     | 14.55                   |
| 149 | 3.423                                  | 0.169                                | 0.0494                  | 578.2                             | 5.97               | 22.30             | 16.33                                       | 3.601                                         | 91.52             | 50.371                                     | 14.72                   |
| 150 | 5.495                                  | 0.179                                | 0.0326                  | 579.7                             | 5.90               | 31.97             | 26.07                                       | 3.598                                         | 144.98            | 79.698                                     | 14.50                   |
| 151 | 4.474                                  | 0.169                                | 0.0378                  | 569                               | 5.92               | 27.34             | 21.42                                       | 3.569                                         | 118.57            | 65.176                                     | 14.56                   |

1.—January 30, 1896. Outside temperature 16° C. Barometer 736 mm. = 0.997 kg. Convergent nozzle B.  
Diameter 15.19 mm. Area at 120° C.: 1.819 sq. cm.

| No. | Absolute Pressures.                    |                                      | Ratio,<br>$\frac{p}{P}$ | Head,<br>$H$<br>Milli-<br>metres. | Temperatures.      |                   | Rise of<br>Temper-<br>ature,<br>$t_1 - t_0$ | Total<br>Water<br>Dis-<br>charged,<br>kgs/sec | Steam Discharged. |                                              |                                                    | Ratio,<br>$\frac{W}{W_m}$ |
|-----|----------------------------------------|--------------------------------------|-------------------------|-----------------------------------|--------------------|-------------------|---------------------------------------------|-----------------------------------------------|-------------------|----------------------------------------------|----------------------------------------------------|---------------------------|
|     | Initial,<br>$P$<br>kgs/cm <sup>2</sup> | Final,<br>$p$<br>kgs/cm <sup>2</sup> |                         |                                   | Entering,<br>$t_0$ | Leaving,<br>$t_1$ |                                             |                                               | Total,<br>gr/sec  | Per<br>sq. cm.,<br>$\frac{W}{W_m}$<br>gr/sec | Theoretic<br>Maximum,<br>$\frac{W}{W_m}$<br>gr/sec |                           |
| 1   | 2                                      | 3                                    | 4                       | 5                                 | 6                  | 7                 | 8                                           | 9                                             | 10                | 11                                           | 12                                                 | 13                        |
| 12  | 3.84                                   | 2.933                                | 0.764                   | 451                               | 5.60               | 23.50             | 17.90                                       | 3.179                                         | 88.44             | 48.62                                        | 56.43                                              | 0.816                     |
| 13  | 3.92                                   | 3.492                                | 0.891                   | 482                               | 5.60               | 18.70             | 13.10                                       | 3.290                                         | 66.94             | 36.75                                        | 57.57                                              | 0.638                     |
| 14  | 4.04                                   | 3.716                                | 0.920                   | 220                               | 5.41               | 22.85             | 17.45                                       | 2.222                                         | 60.29             | 33.09                                        | 59.29                                              | 0.558                     |
| 15  | 5.00                                   | 4.826                                | 0.965                   | 131                               | 5.07               | 23.10             | 18.03                                       | 1.714                                         | 47.76             | 26.26                                        | 72.95                                              | 0.360                     |

## FLOW OF STEAM

2.—January 31, 1896. Outside temperature 17° C. Barometer 735 mm. = 0.996 kg. Convergent nozzle D. Diameter 15.19 mm. Area at 120° C.: 1.819 sq. cm.

| No. | Absolute Pressures.                    |                                      | Ratio,<br>$\frac{P}{P}$ | Head,<br>$H$<br>Milli-<br>metres. | Temperatures.      |                   | Rise of<br>Temper-<br>ature,<br>$t_1 - t_0$ | Total<br>Water<br>Dis-<br>charged,<br>kgs/sec | Steam Discharged. |                                            |                                                    | Ratio,<br>$\frac{W}{W_m}$ |
|-----|----------------------------------------|--------------------------------------|-------------------------|-----------------------------------|--------------------|-------------------|---------------------------------------------|-----------------------------------------------|-------------------|--------------------------------------------|----------------------------------------------------|---------------------------|
|     | Initial,<br>$P$<br>kgs/cm <sup>2</sup> | Final,<br>$p$<br>kgs/cm <sup>2</sup> |                         |                                   | Entering,<br>$t_0$ | Leaving,<br>$t_1$ |                                             |                                               | Total<br>gr/sec   | Per<br>sq. cm.,<br>$\frac{W}{W}$<br>gr/sec | Theoretic<br>Maximum,<br>$\frac{W_m}{W}$<br>gr/sec |                           |
| 1   | 2                                      | 3                                    | 4                       | 5                                 | 6                  | 7                 | 8                                           | 9                                             | 10                | 11                                         | 12                                                 | 13                        |
| 16  | 4.23                                   | 3.603                                | 0.852                   | 458.5                             | 5.60               | 22.10             | 16.50                                       | 3.207                                         | 82.09             | 45.12                                      | 61.99                                              | 0.728                     |
| 17  | 5.42                                   | 5.164                                | 0.953                   | 498                               | 5.72               | 17.72             | 12.00                                       | 3.345                                         | 62.01             | 34.08                                      | 78.89                                              | 0.432                     |
| 18  | 5.52                                   | 4.581                                | 0.830                   | 399                               | 5.60               | 29.98             | 24.38                                       | 2.986                                         | 112.46            | 61.82                                      | 80.30                                              | 0.770                     |
| 19  | 5.75                                   | 5.113                                | 0.892                   | 413                               | 5.62               | 26.50             | 20.88                                       | 3.041                                         | 98.00             | 53.87                                      | 83.50                                              | 0.645                     |
| 20  | 5.56                                   | 5.132                                | 0.923                   | 443.5                             | 5.62               | 22.30             | 16.68                                       | 3.154                                         | 81.23             | 44.66                                      | 80.87                                              | 0.552                     |
| 21  | 6.24                                   | 5.763                                | 0.924                   | 415.5                             | 5.57               | 24.78             | 19.21                                       | 3.051                                         | 90.32             | 49.65                                      | 90.45                                              | 0.549                     |
| 22  | 6.43                                   | 6.236                                | 0.970                   | 485                               | 5.62               | 17.33             | 11.71                                       | 3.301                                         | 59.42             | 32.72                                      | 93.11                                              | 0.351                     |
| 23  | 6.46                                   | 6.296                                | 0.975                   | 120.4                             | 5.17               | 27.00             | 21.83                                       | 1.641                                         | 55.12             | 30.30                                      | 93.53                                              | 0.324                     |
| 24  | 6.05                                   | 5.496                                | 0.908                   | 390.5                             | 5.54               | 26.45             | 20.91                                       | 2.954                                         | 95.23             | 52.35                                      | 87.79                                              | 0.597                     |

3.—February 4, 1896. Outside temperature  $16^{\circ}\text{C}$ . Barometer 734 mm. = 0.995 kg. Convergent nozzle C.  
Diameter 24.20 mm. Area at  $120^{\circ}\text{C}$ .: 4.6176 sq. cm.

| No. | Absolute Pressures.                    |                                      | Ratio,<br>$\frac{p}{\bar{p}}$ | Head,<br>$H$ ,<br>Milli-<br>metres. | Temperatures.      |                   | Rise of<br>Temper-<br>ature,<br>$t_1 - t_0$ | Total<br>Water<br>Dis-<br>charged,<br>kgs/sec | Steam Discharged. |                                              |                                                    | Ratio,<br>$\frac{W}{W_m}$ |
|-----|----------------------------------------|--------------------------------------|-------------------------------|-------------------------------------|--------------------|-------------------|---------------------------------------------|-----------------------------------------------|-------------------|----------------------------------------------|----------------------------------------------------|---------------------------|
|     | Initial,<br>$p$<br>kgs/cm <sup>2</sup> | Final,<br>$p$<br>kgs/cm <sup>2</sup> |                               |                                     | Entering,<br>$t_0$ | Leaving,<br>$t_1$ |                                             |                                               | Total,<br>gr/sec  | Per<br>sq. cm.,<br>$\frac{W}{W_m}$<br>gr/sec | Theoretic<br>Maximum,<br>$\frac{W}{W_m}$<br>gr/sec |                           |
| 1   | 2                                      | 3                                    | 4                             | 5                                   | 6                  | 7                 | 8                                           | 9                                             | 10                | 11                                           | 12                                                 | 13                        |
| 39  | 2.72                                   | 1.943                                | 0.744                         | 373                                 | 5.52               | 41.97             | 36.45                                       | 2.876                                         | 162.97            | 35.51                                        | 40.33                                              | 0.881                     |
| 40  | 3.23                                   | 2.025                                | 0.853                         | 348                                 | 5.47               | 41.77             | 36.50                                       | 2.777                                         | 157.20            | 34.04                                        | 47.67                                              | 0.714                     |
| 41  | 3.02                                   | 2.754                                | 0.901                         | 387.5                               | 5.57               | 32.11             | 26.54                                       | 2.941                                         | 121.83            | 26.38                                        | 45.65                                              | 0.591                     |
| 42  | 2.85                                   | 2.731                                | 0.943                         | 437.5                               | 5.57               | 23.00             | 17.43                                       | 3.132                                         | 85.26             | 18.46                                        | 42.20                                              | 0.437                     |
| 43  | 4.05                                   | 2.702                                | 0.951                         | 370.5                               | 5.52               | 31.76             | 26.24                                       | 2.876                                         | 117.22            | 25.38                                        | 59.43                                              | 0.427                     |
| 44  | 5.05                                   | 4.958                                | 0.982                         | 414.7                               | 5.52               | 23.79             | 18.27                                       | 3.049                                         | 86.16             | 18.66                                        | 73.66                                              | 0.253                     |
| 45  | 5.50                                   | 5.458                                | 0.992                         | 453                                 | 5.57               | 17.82             | 12.25                                       | 3.190                                         | 60.33             | 13.06                                        | 80.02                                              | 0.159                     |
| 46  | 2.95                                   | 5.850                                | 0.966                         | 478                                 | 5.32               | 19.21             | 13.89                                       | 3.276                                         | 70.98             | 15.37                                        | 43.57                                              | 0.353                     |
| 48  | 4.03                                   | 3.964                                | 0.984                         | 472                                 | 5.32               | 18.03             | 13.34                                       | 3.252                                         | 67.38             | 14.59                                        | 59.15                                              | 0.247                     |
| 49  | 4.75                                   | 4.656                                | 0.980                         | 414.5                               | 5.32               | 25.18             | 19.86                                       | 3.047                                         | 93.67             | 20.29                                        | 69.39                                              | 0.292                     |
| 50  | 4.96                                   | 4.922                                | 0.992                         | 151                                 | 5.07               | 24.14             | 19.07                                       | 1.830                                         | 53.94             | 11.68                                        | 72.38                                              | 0.161                     |
| 51  | 5.02                                   | 4.987                                | 0.993                         | 104                                 | 4.92               | 26.35             | 21.43                                       | 1.526                                         | 50.53             | 10.94                                        | 72.23                                              | 0.149                     |
| 52  | 1.95                                   | 1.717                                | 0.881                         | 440                                 | 5.32               | 23.40             | 18.08                                       | 3.141                                         | 89.15             | 19.31                                        | 29.21                                              | 0.661                     |
| 53  | 1.58                                   | 1.236                                | 0.782                         | 457                                 | 5.32               | 23.55             | 18.23                                       | 3.201                                         | 91.90             | 19.90                                        | 23.78                                              | 0.837                     |
| 54  | 1.32                                   | 1.138                                | 0.862                         | 484.3                               | 5.32               | 17.57             | 12.25                                       | 3.308                                         | 64.00             | 13.86                                        | 19.96                                              | 0.694                     |

4.—February 5, 1896. Outside temperature 17° C. Barometer 735 mm. = 0.996 kg. Convergent nozzle C.  
Diameter 24.20 mm. Area at 120° C.: 4.6176 sq. cm.

# FLOW OF STEAM

| No. | Absolute Pressures.                    |                                      | Ratio,<br>$\frac{P}{P}$ | Head,<br>$H$<br>Milli-<br>metres. | Temperatures.      |                   | Rise of<br>Temper-<br>ature,<br>$t_1 - t_0$ | Total<br>Water<br>Dis-<br>charged,<br>kgs/sec | Steam Discharged. |                                            |                                                    | Ratio,<br>$\frac{W}{W_m}$ |
|-----|----------------------------------------|--------------------------------------|-------------------------|-----------------------------------|--------------------|-------------------|---------------------------------------------|-----------------------------------------------|-------------------|--------------------------------------------|----------------------------------------------------|---------------------------|
|     | Initial,<br>$P$<br>kgs/cm <sup>2</sup> | Final,<br>$P$<br>kgs/cm <sup>2</sup> |                         |                                   | Entering,<br>$t_0$ | Leaving,<br>$t_1$ |                                             |                                               | Total,<br>gr/sec  | Per<br>sq. cm.,<br>$\frac{W}{W}$<br>gr/sec | Theoretic<br>Maximum,<br>$\frac{W_m}{W}$<br>gr/sec |                           |
| 1   | 2                                      | 3                                    | 4                       | 5                                 | 6                  | 7                 | 8                                           | 9                                             | 10                | 11,                                        | 12                                                 | 13                        |
| 56  | 1.21                                   | 0.787                                | 0.650                   | 521.5                             | 5.42               | 20.50             | 15.08                                       | 3.416                                         | 81.46             | 17.64                                      | 18.34                                              | 0.961                     |
| 57  | 1.24                                   | 0.871                                | 0.702                   | 513.5                             | 5.42               | 20.30             | 14.88                                       | 3.395                                         | 79.68             | 17.25                                      | 18.78                                              | 0.918                     |
| 58  | 1.07                                   | 0.750                                | 0.701                   | 521.5                             | 5.47               | 18.62             | 13.15                                       | 3.423                                         | 71.29             | 15.44                                      | 16.29                                              | 0.948                     |
| 59  | 1.18                                   | 0.937                                | 0.794                   | 513.5                             | 5.47               | 17.97             | 12.50                                       | 3.396                                         | 67.16             | 14.54                                      | 17.90                                              | 0.812                     |
| 60  | 1.16                                   | 1.003                                | 0.865                   | 517.0                             | 5.47               | 15.83             | 10.36                                       | 3.409                                         | 55.86             | 12.10                                      | 17.61                                              | 0.687                     |
| 66  | 1.64                                   | 0.966                                | 0.590                   | 477                               | 5.47               | 27.39             | 21.92                                       | 3.267                                         | 112.72            | 24.42                                      | 24.66                                              | 0.991                     |
| 68  | 1.68                                   | 1.077                                | 0.641                   | 462                               | 5.42               | 27.59             | 22.17                                       | 3.215                                         | 112.20            | 24.30                                      | 25.24                                              | 0.963                     |
| 69  | 1.50                                   | 1.036                                | 0.687                   | 466                               | 5.42               | 24.68             | 19.26                                       | 3.261                                         | 98.11             | 21.25                                      | 22.60                                              | 0.940                     |
| 70  | 1.72                                   | 1.366                                | 0.794                   | 442                               | 5.42               | 25.08             | 19.66                                       | 3.146                                         | 97.22             | 21.07                                      | 25.83                                              | 0.816                     |
| 71  | 2.16                                   | 1.924                                | 0.891                   | 421                               | 5.42               | 24.78             | 19.36                                       | 3.072                                         | 92.78             | 20.09                                      | 32.25                                              | 0.623                     |
| 72  | 5.94                                   | 5.689                                | 0.958                   | 305.5                             | 5.02               | 45.87             | 40.85                                       | 2.590                                         | 163.19            | 35.34                                      | 86.24                                              | 0.410                     |
| 73  | 6.05                                   | 5.855                                | 0.968                   | 335                               | 5.02               | 39.88             | 34.86                                       | 2.727                                         | 146.54            | 31.64                                      | 87.81                                              | 0.360                     |
| 74  | 6.14                                   | 5.995                                | 0.977                   | 357.3                             | 5.02               | 34.25             | 29.23                                       | 2.823                                         | 127.11            | 27.53                                      | 89.06                                              | 0.310                     |
| 75  | 6.26                                   | 6.157                                | 0.983                   | 389.7                             | 5.20               | 28.90             | 23.70                                       | 2.953                                         | 106.77            | 23.34                                      | 90.74                                              | 0.257                     |
| 76  | 6.40                                   | 6.330                                | 0.989                   | 432                               | 5.22               | 23.69             | 18.47                                       | 3.112                                         | 88.47             | 19.16                                      | 92.71                                              | 0.207                     |
| 77  | 6.58                                   | 6.535                                | 0.993                   | 481                               | 5.22               | 19.36             | 14.14                                       | 3.287                                         | 71.48             | 15.48                                      | 95.24                                              | 0.162                     |
| 78  | 6.67                                   | 6.639                                | 0.995                   | 496.5                             | 5.20               | 16.83             | 11.63                                       | 3.340                                         | 59.71             | 12.93                                      | 96.51                                              | 0.134                     |

6.—March 10, 1896. Outside temperature 20° C. Barometer 732 mm. = 0.992 kg. Convergent nozzle A.  
Diameter 10.49 mm. Area at 120° C.: 0.8686 sq. cm.

| No. | Absolute Pressures.                    |                                      | Ratio,<br>$\frac{p}{P}$ | Head,<br>$H$<br>Milli-<br>metres. | Temperatures.      |                   | Rise of<br>Temper-<br>ature,<br>$t_1 - t_0$ | Total<br>Water<br>Dis-<br>charged,<br>kgs/sec | Steam Discharged. |                                              |                                                      | Ratio,<br>$\frac{W}{W_m}$ |
|-----|----------------------------------------|--------------------------------------|-------------------------|-----------------------------------|--------------------|-------------------|---------------------------------------------|-----------------------------------------------|-------------------|----------------------------------------------|------------------------------------------------------|---------------------------|
|     | Initial,<br>$P$<br>kgs/cm <sup>2</sup> | Final,<br>$p$<br>kgs/cm <sup>2</sup> |                         |                                   | Entering,<br>$t_0$ | Leaving,<br>$t_1$ |                                             |                                               | Total,<br>gr/sec  | Per<br>sq. cm.,<br>$\frac{W}{W_m}$<br>gr/sec | Theoretic<br>Maximum,<br>$\frac{W_m}{W_m}$<br>gr/sec |                           |
| 1   | 2                                      | 3                                    | 4                       | 5                                 | 6                  | 7                 | 8                                           | 9                                             | 10                | 11                                           | 12                                                   | 13                        |
| 105 | 10.31                                  | 6.10                                 | 0.600                   | 344.3                             | 5.90               | 36.00             | 30.10                                       | 2.769                                         | 127.30            | 146.54                                       | 147.30                                               | 0.995                     |
| 106 | 10.29                                  | 6.44                                 | 0.626                   | 344.3                             | 5.90               | 35.75             | 29.85                                       | 2.765                                         | 126.07            | 145.14                                       | 147.02                                               | 0.987                     |
| 107 | 10.21                                  | 6.69                                 | 0.655                   | 346.3                             | 5.88               | 34.75             | 28.87                                       | 2.778                                         | 122.50            | 141.03                                       | 145.91                                               | 0.966                     |
| 108 | 10.17                                  | 6.94                                 | 0.683                   | 349                               | 5.88               | 34.05             | 28.17                                       | 2.789                                         | 120.05            | 138.21                                       | 145.37                                               | 0.951                     |
| 109 | 10.14                                  | 7.19                                 | 0.710                   | 356                               | 5.88               | 33.05             | 27.17                                       | 2.818                                         | 117.00            | 134.69                                       | 144.90                                               | 0.929                     |
| 110 | 10.09                                  | 7.44                                 | 0.738                   | 364                               | 5.88               | 31.76             | 25.88                                       | 2.851                                         | 112.73            | 129.78                                       | 144.25                                               | 0.899                     |
| 111 | 10.19                                  | 7.74                                 | 0.760                   | 368                               | 5.88               | 31.22             | 25.34                                       | 2.867                                         | 110.97            | 127.76                                       | 145.65                                               | 0.877                     |
| 112 | 10.44                                  | 7.99                                 | 0.766                   | 366                               | 5.88               | 31.67             | 25.79                                       | 2.859                                         | 112.56            | 129.60                                       | 149.10                                               | 0.869                     |
| 113 | 10.52                                  | 8.44                                 | 0.803                   | 380.7                             | 5.88               | 29.79             | 23.91                                       | 2.917                                         | 106.47            | 122.58                                       | 150.21                                               | 0.816                     |
| 114 | 10.56                                  | 8.94                                 | 0.846                   | 403.5                             | 5.88               | 27.25             | 21.37                                       | 3.005                                         | 98.01             | 112.84                                       | 150.76                                               | 0.754                     |
| 115 | 10.67                                  | 9.49                                 | 0.890                   | 428                               | 5.88               | 23.99             | 18.11                                       | 3.097                                         | 85.58             | 98.51                                        | 152.29*                                              | 0.647                     |
| 116 | 10.78                                  | 9.92                                 | 0.921                   | 439                               | 5.88               | 21.70             | 15.82                                       | 3.138                                         | 75.72             | 87.16                                        | 153.81                                               | 0.567                     |

7.—March 12, 1896. Outside temperature 21° C. Barometer 729 mm. = 0.988 kg. Thin-plate orifice  $\Delta$   
 Diameter 20.12 mm. Area at 120° C.: 3.1918 sq. cm.

| No. | Absolute Pressures.                    |                                      | Ratio,<br>$\frac{p}{P}$ | Head,<br>$H$<br>Milli-<br>metres. | Temperatures.      |                   | Rise of,<br>Temper-<br>ature,<br>$t_1 - t_0$ | Total<br>Water<br>Dis-<br>charged,<br>kgs/sec | Steam Discharged. |                                              |                                                    | Ratio,<br>$\frac{W}{W_m}$ |
|-----|----------------------------------------|--------------------------------------|-------------------------|-----------------------------------|--------------------|-------------------|----------------------------------------------|-----------------------------------------------|-------------------|----------------------------------------------|----------------------------------------------------|---------------------------|
|     | Initial,<br>$P$<br>kgs/cm <sup>2</sup> | Final,<br>$p$<br>kgs/cm <sup>2</sup> |                         |                                   | Entering,<br>$t_0$ | Leaving,<br>$t_1$ |                                              |                                               | Total,<br>gr/sec  | Per<br>sq. cm.,<br>$\frac{W}{W_m}$<br>gr/sec | Theoretic<br>Maximum,<br>$\frac{W}{W_m}$<br>gr/sec |                           |
| 1   | 2                                      | 3                                    | 4                       | 5                                 | 6                  | 7                 | 8                                            | 9                                             | 10                | 11                                           | 12                                                 | 13                        |
| 117 | 4.04                                   | 0.156                                | 0.0390                  | 577                               | 6.22               | 35.95             | 29.73                                        | 3.585                                         | 165.72            | 51.92                                        | 59.29                                              | 0.876                     |
| 118 | 4.02                                   | 0.441                                | 0.1096                  | 548                               | 6.12               | 36.35             | 30.23                                        | 3.493                                         | 164.19            | 51.44                                        | 59.01                                              | 0.872                     |
| 119 | 3.96                                   | 0.738                                | 0.1863                  | 489                               | 6.04               | 37.55             | 31.51                                        | 3.298                                         | 161.64            | 50.64                                        | 58.15                                              | 0.871                     |
| 120 | 3.86                                   | 0.993                                | 0.2573                  | 445                               | 6.02               | 38.27             | 32.25                                        | 3.145                                         | 157.82            | 49.45                                        | 56.72                                              | 0.872                     |
| 121 | 2.41                                   | 0.298                                | 0.1237                  | 571.3                             | 6.12               | 24.09             | 17.97                                        | 3.578                                         | 100.77            | 31.56                                        | 35.86                                              | 0.884                     |
| 122 | 2.54                                   | 0.728                                | 0.2866                  | 506.5                             | 6.12               | 25.87             | 19.05                                        | 3.368                                         | 104.12            | 32.63                                        | 37.73                                              | 0.865                     |
| 123 | 2.57                                   | 0.958                                | 0.3728                  | 482.5                             | 5.97               | 26.35             | 20.38                                        | 3.287                                         | 104.84            | 32.75                                        | 38.16                                              | 0.858                     |
| 124 | 2.61                                   | 1.148                                | 0.4398                  | 460.6                             | 6.12               | 26.80             | 20.68                                        | 3.211                                         | 103.93            | 32.57                                        | 38.74                                              | 0.841                     |
| 125 | 2.27                                   | 1.168                                | 0.5145                  | 464.2                             | 6.12               | 23.45             | 17.33                                        | 3.226                                         | 87.69             | 27.44                                        | 33.84                                              | 0.811                     |
| 126 | 2.36                                   | 1.378                                | 0.5839                  | 453.2                             | 6.12               | 23.45             | 17.33                                        | 3.187                                         | 86.58             | 27.13                                        | 35.13                                              | 0.772                     |
| 127 | 2.51                                   | 1.668                                | 0.665                   | 439.2                             | 6.12               | 23.55             | 17.43                                        | 3.145                                         | 85.64             | 26.84                                        | 37.30                                              | 0.720                     |
| 128 | 2.24                                   | 1.738                                | 0.776                   | 459.8                             | 6.12               | 19.22             | 13.10                                        | 3.218                                         | 66.03             | 20.69                                        | 33.40                                              | 0.619                     |

8.—March 13, 1896. Outside temperature 23° C. Barometer 727 mm. = 0.985 kg. Thin-plate orifice *D*.  
Diameter 20.12 mm. Area at 120° C.: 3.1918 sq. cm.

| No. | Absolute Pressures.                    |                                      | Ratio,<br>$\frac{p}{P}$ | Head,<br><i>H</i><br>Milli-<br>metres. | Temperatures.      |                   | Rise of<br>Temper-<br>ature,<br>$t_1 - t_0$ | Total<br>Water<br>Dis-<br>charged,<br>kgs/sec | Steam Discharged. |                                              |                                                    | Ratio,<br>$\frac{W}{W_m}$ |
|-----|----------------------------------------|--------------------------------------|-------------------------|----------------------------------------|--------------------|-------------------|---------------------------------------------|-----------------------------------------------|-------------------|----------------------------------------------|----------------------------------------------------|---------------------------|
|     | Initial,<br>$P$<br>kgs/cm <sup>2</sup> | Final,<br>$p$<br>kgs/cm <sup>2</sup> |                         |                                        | Entering,<br>$t_0$ | Leaving,<br>$t_1$ |                                             |                                               | Total,<br>gr/sec  | Per<br>sq. cm.,<br>$\frac{W}{W_m}$<br>gr/sec | Theoretic<br>Maximum,<br>$\frac{W}{W_m}$<br>gr/sec |                           |
| 1   | 2                                      | 3                                    | 4                       | 5                                      | 6                  | 7                 | 8                                           | 9                                             | 10                | 11                                           | 12                                                 | 13                        |
| 129 | 4.135                                  | 1.355                                | 0.329                   | 428                                    | 5.87               | 40.03             | 34.16                                       | 3.083                                         | 163.54            | 51.27                                        | 60.63                                              | 0.846                     |
| 130 | 4.135                                  | 1.635                                | 0.396                   | 396                                    | 5.82               | 41.08             | 35.26                                       | 2.965                                         | 162.43            | 50.91                                        | 60.63                                              | 0.840                     |
| 131 | 3.835                                  | 1.885                                | 0.492                   | 397                                    | 5.84               | 37.68             | 31.84                                       | 2.934                                         | 145.38            | 45.55                                        | 56.40                                              | 0.808                     |
| 132 | 3.805                                  | 2.045                                | 0.538                   | 377                                    | 5.87               | 37.32             | 31.45                                       | 2.897                                         | 141.75            | 44.42                                        | 55.97                                              | 0.794                     |
| 133 | 2.985                                  | 1.595                                | 0.534                   | 421                                    | 5.82               | 29.25             | 23.43                                       | 3.068                                         | 112.27            | 35.18                                        | 44.15                                              | 0.797                     |
| 134 | 3.035                                  | 1.805                                | 0.595                   | 409.6                                  | 5.82               | 29.10             | 23.28                                       | 3.026                                         | 109.92            | 34.45                                        | 44.87                                              | 0.768                     |
| 135 | 3.185                                  | 2.045                                | 0.642                   | 399.6                                  | 5.82               | 29.20             | 23.38                                       | 2.989                                         | 109.01            | 34.15                                        | 47.03                                              | 0.726                     |
| 136 | 2.635                                  | 1.678                                | 0.637                   | 423                                    | 5.82               | 25.18             | 19.36                                       | 3.077                                         | 93.18             | 29.13                                        | 39.26                                              | 0.743                     |
| 137 | 2.985                                  | 2.349                                | 0.786                   | 456.5                                  | 5.67               | 22.65             | 16.98                                       | 3.199                                         | 84.88             | 26.57                                        | 44.15                                              | 0.602                     |
| 138 | 3.235                                  | 2.711                                | 0.838                   | 455.5                                  | 5.67               | 21.95             | 16.28                                       | 3.196                                         | 81.09             | 25.41                                        | 47.75                                              | 0.532                     |
| 139 | 3.485                                  | 3.036                                | 0.870                   | 450.5                                  | 5.72               | 21.50             | 15.78                                       | 3.181                                         | 78.14             | 24.48                                        | 51.36                                              | 0.477                     |
| 140 | 3.885                                  | 3.516                                | 0.905                   | 453.5                                  | 5.72               | 20.90             | 15.18                                       | 3.190                                         | 75.23             | 23.57                                        | 57.13                                              | 0.413                     |
| 141 | 4.385                                  | 4.113                                | 0.936                   | 454.3                                  | 5.70               | 19.61             | 19.91                                       | 3.193                                         | 68.88             | 21.58                                        | 64.20                                              | 0.336                     |
| 142 | 4.635                                  | 4.409                                | 0.950                   | 462.2                                  | 5.70               | 18.71             | 13.01                                       | 3.222                                         | 64.93             | 20.34                                        | 67.76                                              | 0.300                     |
| 143 | 4.985                                  | 4.814                                | 0.965                   | 480                                    | 5.70               | 17.02             | 11.32                                       | 3.284                                         | 57.50             | 18.02                                        | 72.74                                              | 0.248                     |

## NOTE ON THE FLOW OF HOT WATER THROUGH NOZZLES.

IN this short note I propose to analyze the phenomenon of the flow of hot water through a convergent nozzle and to explain the results obtained by Sauvage & Pulin in experiments made by them in 1892,<sup>1</sup> which appear very singular at the first glance.

The theory developed in the preceding work relating to the flow of steam can be extended to the somewhat more complex problem of hot water which is partially vaporized during the discharge. The most simple case, which I will discuss first, is that in which the water in the high-pressure receptacle is initially at exactly the temperature  $T_0$  corresponding to the pressure  $P_0$  of the steam; that is to say, just on the point of evaporating. It will then begin to evaporate as soon as its pressure and temperature fall. A remarkable circumstance gives to this phenomenon a very special interest, namely, that the quantity vaporized on the one hand and the velocity of flow of the mixture of water and steam formed on the other hand are both practically

---

<sup>1</sup> Ed. Sauvage, *Ecoulement de l'eau des Chaudières* (Annales des Mines, 9th Series, Vol. II, page 192).

proportional to the fall of temperature. Considering the entropy diagram,<sup>1</sup> Fig. 3, let  $AD$  be the curve of the entropy of water, and  $EF$  that of saturated steam. Let the point  $A$  represent the state of the hot water

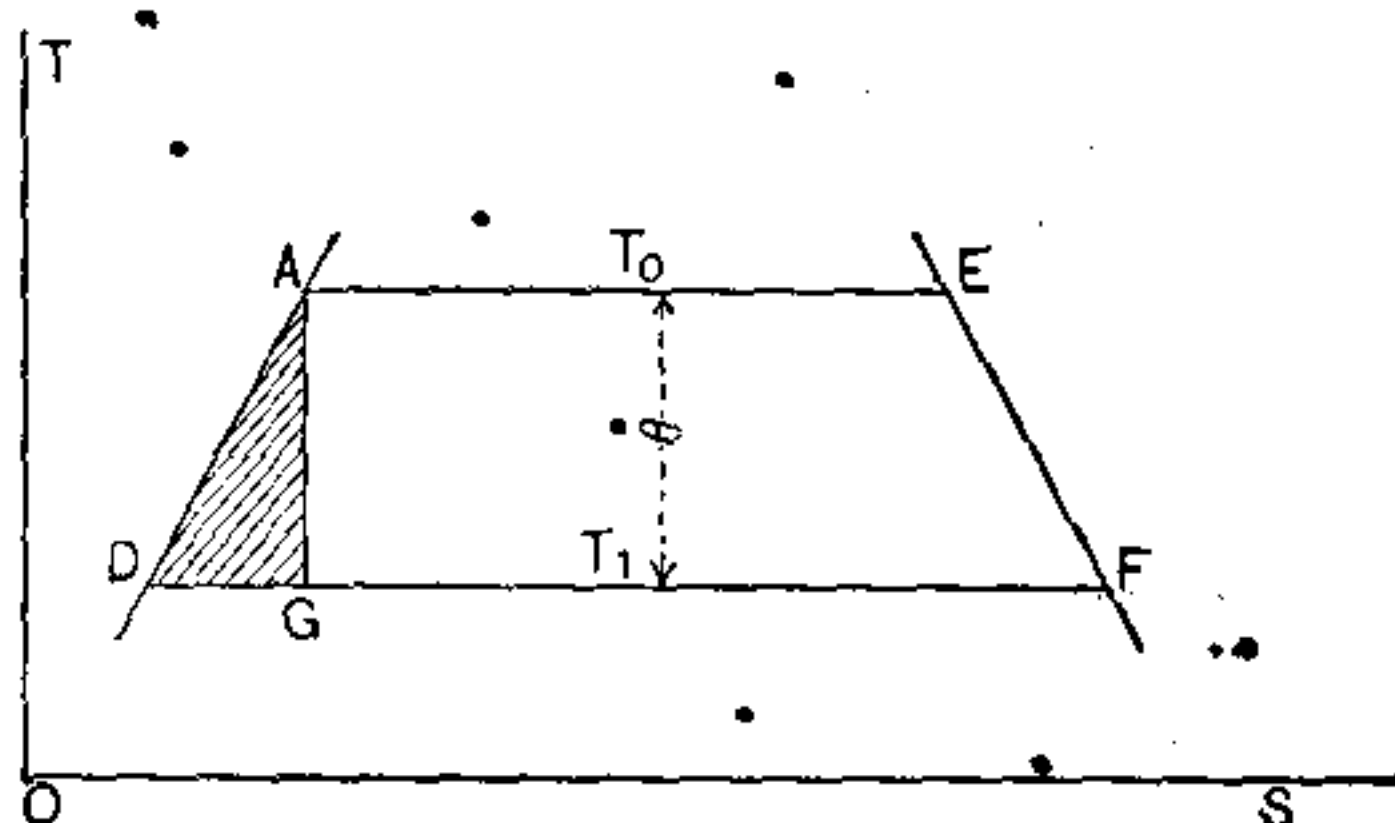


FIG. 3.

at the temperature  $T_0$  and the corresponding pressure  $P_0$ .

During the expansion in the nozzle a small quantity of steam is generated which forms a more or less homogeneous mixture with the remaining water. It may be admitted that the expansion is adiabatic on account of the very short time during which the fluid remains in contact with the walls of the nozzle. This adiabatic expansion is represented on the entropy diagram by the line  $AG$  parallel to the axis of temperatures. When the mixture has reached the temperature  $T_1$  differing from  $T_0$  by the quantity  $\theta$ , the proportion of steam

---

<sup>1</sup> The utilization of the entropy diagram for the vapor of water was made the subject of some remarkable articles by Prof. Boulvin in the *Revue de Mécanique* in 1897 and 1901.

generated is given by the ratio of the segment of the straight line  $DG$  to  $DF$ .<sup>1</sup> Now the curve  $AD$  of the entropy of water is practically the same as its tangent at the point  $A$ , if the fall of temperature is not large.  $DG$  is then proportional to the fall in temperature  $\theta$ , with a tendency, however, to increase a little quicker than  $\theta$ , and one can write that the ratio of  $DG$  to  $DF$  is very nearly proportional to  $\theta$ ; that is to say,

$$x = a\theta,$$

$a$  being a coefficient which depends on the initial temperature  $T_0$ . The value of this coefficient can be easily ascertained if the entropy diagram be drawn to a large scale.

On the other hand the velocity of flow  $V$  at the moment when the temperature has fallen to  $T$ , is given by the area of the triangle  $AGD$ . The base of this triangle is approximately equal to  $x\frac{r}{T_0}$ ,  $r$  being the heat of vaporization of the water. We have then the following relation:

$$\frac{V^2}{2g} = \frac{1}{2}Ex\theta \frac{r}{T_0} = \frac{1}{2}Ea\theta^2 \frac{r}{T_0},$$

whence

$$V = \theta \sqrt{gEa \frac{r}{T_0}}. \quad \cdot \quad \cdot \quad \cdot \quad \cdot \quad \cdot \quad (1)$$

---

<sup>1</sup> We may safely assume that there is no retardation of the vaporization so that the quantity of steam in the mixture is that corresponding to the segment  $DG$  at each instant.

We will now calculate the area of nozzle necessary to allow unit mass of water to flow when the temperature has fallen by  $\theta^\circ$ . This area is equal to the specific volume  $v$  of the mixture of water and steam divided by the velocity  $V$ .

The specific volume  $v$  is equal to  $1 - x + \frac{x}{D}$ ,  $D$  being the density of saturated steam at the temperature  $T_1 = T_0 - \theta$ , or replacing  $x$  by its value  $a\theta$ , we have

$$v = 1 - a\theta + \frac{a\theta}{D}. \quad \dots \quad (2)$$

Dividing  $v$  by  $V$ , we have the area  $S$ :

$$S = \frac{1}{\sqrt{gEa\frac{r}{T_0}}} \left( \frac{1}{\theta} + \frac{a}{D} - a \right). \quad \dots \quad (3)$$

For any given initial temperature  $a$  and  $r$  are fixed. In the expression for  $S$ , consequently, the only variables are the fall of temperature  $\theta$  and the density  $D$  which is a function of  $T_0 - \theta$ ; consequently  $S$  increases or decreases in proportion to the quantity  $\frac{1}{\theta} + \frac{a}{D}$ , and since  $a$  is very small,  $S$  is practically proportional to this quantity. Now when  $\theta$  increases  $\frac{1}{\theta}$  decreases. But on the other hand the density  $D$  diminishes and consequently the second term  $\frac{a}{D}$  increases, so that a time arrives when the increase of the second term compen-

sates for the decrease of the first, and the quantity  $\frac{1}{\theta} + \frac{a}{D}$  then passes through a minimum.

In order to ascertain the position of the minimum it is necessary to express  $D$  as a function of the temperature.

In default of a simple relation between these quantities the problem can be solved in any particular case by the aid of Regnault's tables; for example:

Suppose the initial pressure  $P$  equals 10 kilogrammes per square centimetre. The corresponding temperature  $T_0$  equals  $178.886 + 273^\circ$ . By the entropy diagram the value of  $a$  is found to be 0.00216; the density is given by the tables. It should be noted that  $D$  must be expressed in kilogrammes per cubic decimetre.

The following are the values of the quantity  $\frac{1}{\theta} + \frac{a}{D}$  for increasing values of  $\theta$  in the neighborhood of the minimum:

|                                   |                                           |
|-----------------------------------|-------------------------------------------|
| For $\theta = 6^\circ \text{ C.}$ | $\frac{1}{\theta} + \frac{a}{D} = 0.6501$ |
| 7°                                | 0.6374                                    |
| 8°                                | 0.6300                                    |
| 9°                                | 0.6274                                    |
| 10°                               | 0.6293                                    |
| 11°                               | 0.6325                                    |
| 12°                               | 0.6355                                    |

Plotting the curve, it is seen that the minimum occurs for  $\theta = 9.2^\circ$ . The absolute pressure corresponding to this value of  $\theta$  is 8.044 kilogrammes per square centi-

metre. Consequently when the pressure falls below about 80 per cent of the initial pressure it is necessary for the nozzle to diverge in order that the mixture of water and steam should continue to expand.

If the nozzle is simply convergent, the pressure at the mouth of the nozzle will be exactly equal to the value just obtained (i.e., 8.044 kg.). If the discharge takes place into a space in which the pressure is much less than this, as, for example, into the atmosphere, a sudden expansion occurs which is much stronger than in the case of the discharge of steam alone. The jet is seen to swell suddenly and take the form of a very wide paraboloid, as is well shown by the photographs reproduced in M. Sauvage's memoir.

The lateral expansion of the jet is enormous at the mouth of the nozzle because, as we shall see, the speed of flow of the mixture is not high and it is proportionately greater as the pressure in the exhaust space is lower than the pressure  $p$  giving the maximum output. The discharge per unit of area of the mouth of the nozzle can be calculated from the pressure  $p$  which

makes the quantity  $\frac{1}{\theta} + \frac{a}{D}$  a minimum. Making this

calculation for the case under consideration, we find first that the quantity of steam generated  $x$  is equal to 1.99 per cent; that the specific volume of the mixture reaches the value 5.78; that is to say, at the mouth of the nozzle the steam occupies a volume 4.78 times that of the water; that the speed of the mixture at the mouth is 28.55 metres per second; and finally that the

weight of fluid discharged is 494 grammes per square centimetre of orifice per second.

It is interesting to compare this last figure with that obtained if the nozzle was discharging initially saturated steam. In that case the quantity discharged would be 143 grammes per square centimetre per second. In the case of the hot water, therefore, the weight discharged is 3.5 times larger.

If the expansion is to be continued in the nozzle, the throat must be followed by a divergent portion. In Fig. 4 the curve  $CMD$  of the areas as ordinates is

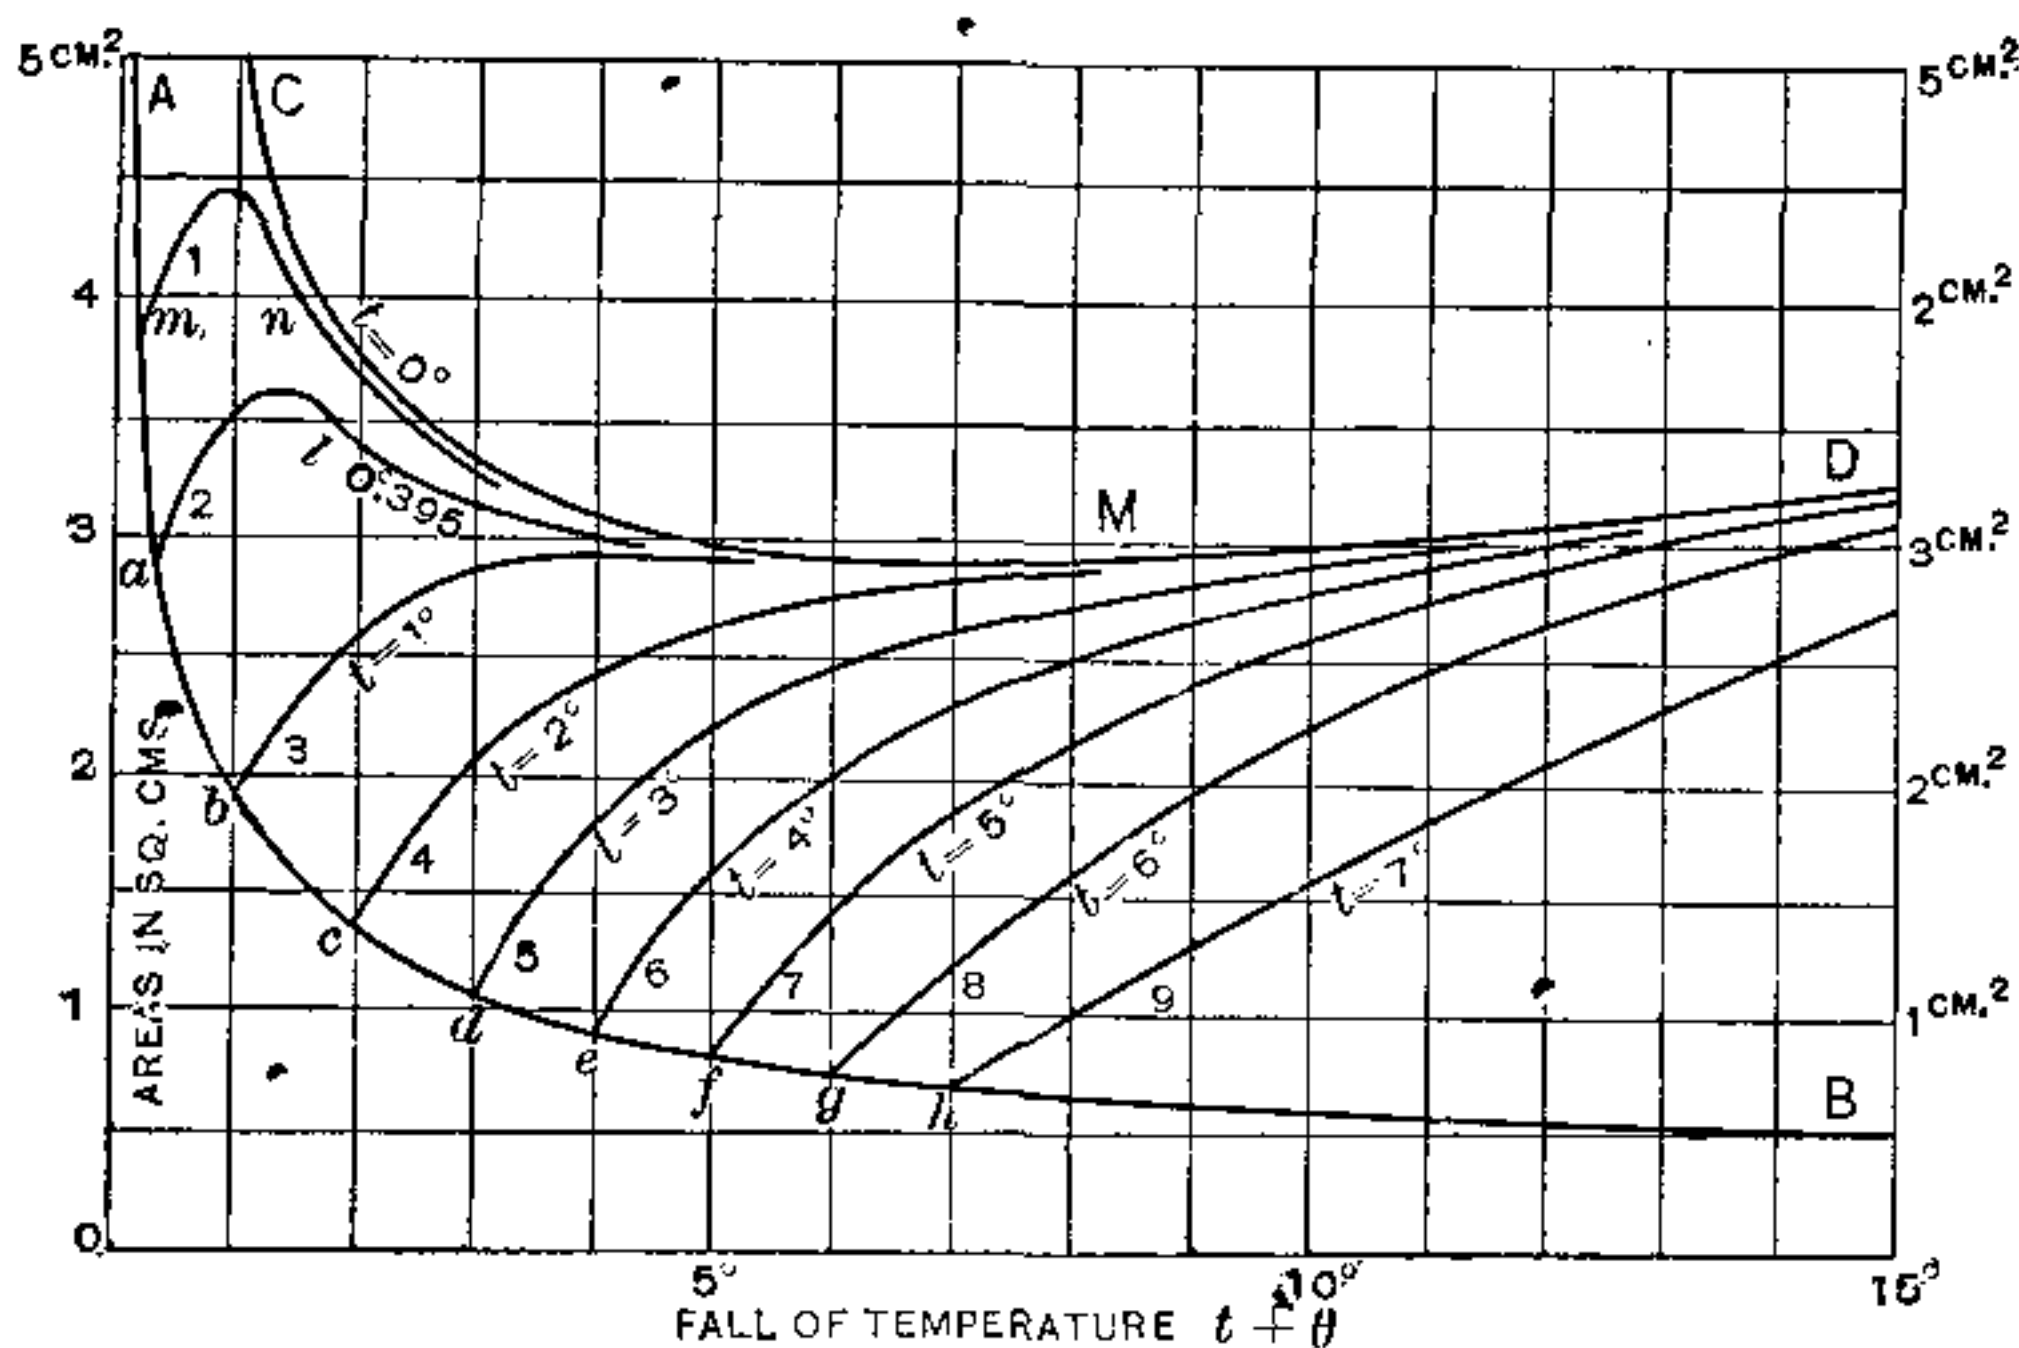


FIG. 4.

given as a function of the fall of temperature for the case where  $P_0$  is 6 kilogrammes per square centimetre, the water being initially at the temperature of vaporization at this pressure.

In the case of the flow of initially saturated steam, it was found that the value of the ratio  $\frac{p}{P}$  corresponding to the minimum area (that is to say also, to the maximum discharge) is equal to 0.58, and that it is sensibly independent of the initial pressure  $P_0$ . In the case of hot water we have found, when  $P_0$  equals 10 kilogrammes per square centimetre, that the value of the ratio corresponding to the minimum area is equal to 0.804, a value very much larger than the preceding. On repeating the same calculations for different initial pressures it is found that the value of the ratio  $\frac{p}{P}$  corresponding to the minimum varies considerably. It approaches unity as the pressure  $P_0$  decreases; thus for  $P_0=6$  kilogrammes per square centimetre we find that the fall of temperature  $\theta$ , which gives the minimum value for  $\frac{1}{\theta} - \frac{a}{D}$ , is 7.15 degrees, whence  $\frac{p}{P}=0.829$ ; the speed of flow at the mouth of the nozzle is now only 22.5 metres per second, and the discharge 344 grammes per second.

Let it be supposed now that the water is initially at a temperature lower by  $t^0$  than  $T_0$ , the temperature of vaporization at the pressure  $P_0$ . As long as the fall of pressure is insufficient to cause evaporation the water will remain in the liquid state and the discharge will follow the laws for liquids. When the pressure falls below this limit, however, partial evaporation will take place, and again a point will be reached at

which the increase of the specific volume will compensate the increase of velocity. At this moment the area of the flow will become a minimum. The decrement of temperature  $t$  has the effect, then, of rapidly increasing the possible discharge per unit section of a given nozzle. We shall see later, by an example, that, except for very small values of  $t$ , the minimum area corresponds exactly to the point where evaporation begins to occur.

Calling  $P'$  the pressure existing at the point where evaporation begins (namely, the pressure corresponding to the temperature  $T_0 - t$  for saturated steam) and  $\theta$  the fall of temperature from this point, the speed of flow is given by the relation

$$\frac{V^2}{2g} = \frac{P_0 - P'}{D} + \frac{1}{2} g E a \theta^2 \frac{r}{T_0 - t}, \quad (4)$$

$D$  being the density of the liquid and  $a$  having the signification already given. The specific volume of the mixture is always given by the expression

$$V = 1 - a\theta + \frac{a\theta}{D}.$$

The analytical discussion in this case is even more difficult than in the preceding; but any particular case can be solved by means of Regnault's tables. It will be seen from the above that only a slight fall of temperature is sufficient to increase the discharge enormously. Thus, for example, to obtain a discharge of 494 grammes per second for a pressure of 10 kilogrammes per square

centimetre, the speed must increase to 4.94 metres per second. For this speed

$$P_0 - P' = 0.124, \text{ whence } t = 0.54^\circ.$$

This low value clearly shows the considerable influence which the decrement of temperature has on the discharge from a convergent nozzle.

Now in different parts of a boiler the temperature of the water is always a little lower than the temperature of vaporization. This difference will easily amount to several degrees, and is very variable, not only from point to point in the boiler, but also from one moment to another, depending on the state of the internal currents and the activity of the evaporation. One would consequently expect to find extremely variable discharges, such as have been shown by the experiments of Sauvage & Pulin. The increase of the discharge with reference to that taking place if there were no decrement of temperature, forms an indication of the amount of the decrement in temperature.

As this decrement of temperature increases, the flow tends to approach more and more that of a simple liquid and does not differ at all when the initial temperature of the water  $T_0 - t$  is equal to or less than that of the vapor corresponding to the pressure  $P_1$  in the exhaust space. The discharge will then reach the value

$$\sqrt{2g \cdot \frac{P_0 - P_1}{D}}$$

per square centimetre per second. The actual dis-

charge is always found to lie between this last value and that which we have previously calculated for the case when the water is initially at the temperature  $T_0$ . For example, for an initial pressure of 6 kilogrammes per square centimetre and discharging into the atmosphere, the discharge per second per square centimetre should lie between 3130 grammes and 344 grammes, the figure just given. In their experiments Sauvage & Pulin found discharges for a pressure of 6 kilogrammes per square centimetre, varying irregularly around the value 1350 grammes, which would appear to indicate that under the conditions of the experiments the water was at a temperature about 6 degrees lower than that of steam at the same pressure.

For the sake of example I have given in Fig. 4 nozzle areas for the discharge of hot water from an initial pressure of 6 kilogrammes per square centimetre with differences of temperature increasing by single degrees. The total fall of temperature ( $t + \theta$ ) is plotted as abscissæ, while the ordinates indicate the area of flow in square centimetres for a discharge of 1 kilogramme per second. The curve  $AB$  represents the case of cold water (without evaporation);  $CMD$  that of hot water initially at the temperature of vaporization (where  $t = 0$ ); curves 3, 4, . . . 9 correspond to the cases where the decrement of temperature is  $1^\circ$ ,  $2^\circ$ , etc.

For a decrement of  $2^\circ$ , for example, the water at first flows without causing evaporation and the areas decrease up to the point  $C$ ; then, because evaporation takes place, the area increases, from which it will be

seen that if the nozzle is convergent hot water will be discharged without any portion being vaporized, at its initial temperature and at the pressure corresponding to that temperature for saturated steam.

This is not quite general, however. If the curve of areas be drawn for decrements of temperature less than about 1 degree it will be found that two successive minima are obtained, as, for example, curve 2. The first minimum  $a$  is an angular point; the other occurs in the neighborhood of a point  $M$  on the curve  $CD$ . Further, when  $t$  is less than 0.395 degree, the first minimum is larger than the second, as will be seen from curve 1. It would appear from the singular form of this curve of areas that the flow in a convergent nozzle ought to undergo a discontinuity because it is impossible for the fluid to be in the states corresponding to the part of the curve between the points  $m$  and  $n$ . Since the areas of the nozzle are always decreasing, there must be a sudden jump from  $m$  to  $n$ ; that is to say, an instantaneous partial evaporation, and, which is very curious, an equally instantaneous increase in the velocity.

This remarkable phenomenon of a sudden variation in the evaporation and in the speed demands very careful examination. It would appear incompatible *a priori* with the laws of inertia of material bodies; but on thinking of the matter one can see, I think, that these discontinuities are not impossible when fluid bodies are being experimented with, which can be decomposed

#### 74. *FLOW OF HOT WATER THROUGH NOZZLES.*

actually and not only theoretically into very small elementary masses.

I will conclude with these remarks, which are sufficient to show that the flow of a hot liquid presents peculiarities very well worthy of attention.

## APPENDIX.

---

To those wishing to study this subject further, the following bibliography may be of assistance:

YOUNG. Phil. Trans., 1800, p. 187.

LAGERBEIN. Annales de Physique et de Chimie, XVI, 1811 to 1815, p. 204.

SCHMIDT. Poggendorf's Annalen, II, 1824.

BANKS. Memoirs of the Lit. and Phil. Soc. of Manchester (England), Vol. I, p. 389.

D'AUBISSON. Annales des Mines, 1826.

KOCH and BUFF. Pog. Ann., 1836-7.

ST. VENANT and WANTZELL. Jour. de l'Ecole Polytechnique, 1838; Comptes Rendus, 1839-45.

TREMERY. Ann. des Mines, 1844.

BECQUEREL and PONCELET. Comptes Rendus, XXI, 1845.

GRAHAM. Phil. Trans., 1846, 1849, 1863.

FROUDE. Proc. Inst. Civil Eng., VI, 1847.

JOULE and THOMSON. Proc. Royal Soc. London, 1856.

WEISBACH. Civil Ingenieur, V, 1859; XII, 1866.

JOULE. Mem. Lit. and Phil. Soc. Manchester, 3d Series, I, p. 102.

NAPIER. On the Velocity of Steam and other Gases. Spon, 1866.

HERRMAN. Z. V. Deut. Ing., 1867, p. 345.

RANKINE. Outflow of Steam. Van Nostrand's Eng. Mag., Vol. II, p. 116.

ZEUNER. Civil Ing., XX, 1874, and Thermodynamics.

FLIEGNER. Civil Ing., XX, 1874; XXIII, 1874.

BROWNLEE. Trans. Engrs. and Shipbuilders in Scotland, Vol. XVII, 1874-5, p. 13.

GRASHOF. Theor. Masch. Leipsic, 1875.

HIRN. Comptes Rendus, 1886.

REYNOLDS. Phil. Mag., 1886.

PEABODY and KUNHARDT, Trans. A. S. M. E., X, 1888; XI, 1889.

SAUVAGE and PULIN. Ann. des Mines, 1892, p. 192.

DE PARENTY. Ann. de Chim. et de Phys., 1896-7.

UNWIN. Enc. Brit., 9th Ed., Art. Hydromechanics.

MINARY and RESAL. Ann. des Mines, 5th Series, Vol. IX.

MILLER and READ. Tech. Quart., Boston, Vol. VII.

KNEASS. Discharge of Steam through Orifices, Proc. Eng. Club, Phila., Vol. VIII, 3, July, 1891.

STODOLA. Z. V. Deut. Ing., Jan. 10, 1903.

BORSODY and CAIRNCROSS. Pressures and Temperatures in Free Expansion, Trans. A. S. M. E., Vol. XXVI.

ARCHIBALD CONSTABLE & Co. LTD.

# *Technical List*

## STEAM TURBINES

With an Appendix on Gas Turbines  
and the Future of Heat Engines

By DR. A. STODOLA.

PROFESSOR AT THE POLYTECHNIKUM IN ZURICH

Authorized Translation from the Second Enlarged and Revised  
German Edition.

By DR. LOUIS C. LOEWENSTEIN

DEPARTMENT OF MECHANICAL ENGINEERING  
LEHIGH UNIVERSITY

With 241 Cuts and 3 Lithograph Tables.

21s. net.

### CONTENTS :

Elementary Theory of the Steam Turbine. Axial Turbines. Radial Turbines. Theory of the Steam Turbine Thermodynamically Considered. The Steady Flow of Steam. The Laws of Energy in the Steam Turbine. Axial Turbines. Radial Turbines. Construction of the Most Important Turbine Parts. The Critical Angular Velocity of a Multiple Loaded Shaft. Steam Turbine Types. A Few Special Problems of Steam Turbine Theory and Construction. The Future of the Heat Engine.

\* \* Messrs. Archibald Constable & Co. send detailed  
Prospectuses of individual Books post free on application.

## Reinforced Concrete

By CHARLES F. MARSH, M.INST.C.E.

Imperial 8vo. Fully Illustrated.

31s. 6d. net.

### CONTENTS:

General Review of the Subject. Systems Employed. Materials. Practical Construction. Experimental Research and Data Deduced Therefrom. Calculations. Some Structures which have been Erected in Reinforced Concrete. Appendix.

This book is designed to place before engineers, architects and others a complete treatment of the subject of reinforced concrete, in so far as is possible at the present day. The book will be found useful by the many engineers and architects who already take an interest in this form of construction, and who wish to investigate it, and should also be the means of bringing to the notice of others a material whose usefulness and economy in suitable cases are beyond dispute.

The author has endeavoured to make the part relating to the calculations cover all form of construction in as concise a manner as possible, and it is hoped that the tables and diagrams may be of use in saving the labour necessary in making the requisite calculations. The graphical method for finding the stresses to be resisted in domed coverings is new, and greatly simplifies the treatment of these structures.

The book is very fully illustrated in order that all the subject matter, where possible, may be rendered clear, and that a true idea may be formed of the remarkable adaptability of reinforced concrete for constructional purposes.

---

## Steam Boilers

By H. H. POWLES, M.INST.M.E., ETC.

Impl. 8vo. Fully Illustrated.

24s. net.

### CONTENTS:

Early Ideas on the Nature, Production, and Uses of Steam. Savery, Newcomen, Beighton. Jonathan Hulls, Payne, Smeaton, Brindley, Cugnot. Watt, Boulton, Symington, Trevithick. Nathan, Read, Court. Rawford, Trevithick. Trevithick, Woolf, Fulton, Stevens, Linaker Bell, Blenkinsop, Hedley, Stephenson, Griffiths. James, Jacob, Perkins, Joseph Eve, McCurdy. Stephenson, Neville, Goldsworthy Gurney, Seguin. Walter Hancock. Trevithick, Church, Maudslay, Penn, Maceroni, and Squire. Plain Cylindrical Cornish and Lancashire Boilers. Locomotive Boilers. Marine Boilers—Return Tube Boilers. Vertical Boilers.

# Liquid Fuel and its Combustion

By W. H. BOOTH

With about 120 Illustrations and Diagrams.

24s. net.

## CONTENTS :

Historical Notes. Advantages of Liquid Fuel. Petroleum Economics. General Principles of Liquid Fuel Combustion. Atomizing. Varieties of Liquid Fuel. Analysis of Oils. Physical Properties. The Limits of Liquid Fuel. Equivalents of Oil and Coal. Chemical and other Properties of Petroleum. Materials. Combustibles. Water. Calorific and other Units. Smoke and Combustion. Oil Storage on Ships. Marine Furnace Gear. Liquid Fuel Application to Locomotives. Application of Liquid Fuel to Stationary and other Boilers. Mixed System. Navy Tests. Locomotive Practice. Storage. Compressed Air. Calorimetry and Draught. Atomizers. Application to Metallurgy. Appendices. Tables and Data.

---

# Steam Pipes

By W. H. BOOTH

Demy 8vo. Fully Illustrated.

5s. net.

## CONTENTS :

The Duty and Object of Pipes. Faults of Duplicate Pipe Systems. Flow of Steam. Loss of Head Velocity. Formulæ Tables. Equation of Pipes. Resistance of Elbows, etc. Materials: Copper, Cast Iron, Steel. Thickness of Pipes. • Junction Pieces. Dimensions. Flexible Pipes. Riveted Pipe. Flanges. Joints. Socketed Pipes. Whitworth Pipe Threads. American Pipe Threads. Expansion. Coefficients. Spring Bends. General Arrangement. Sliding Joints. Swivel Joint. Anchoring. Temperature and Pressure of Steam. Strength of Pipes. Threads. Board of Trade Rules. Anti-Priming Pipes. Outlet Valves. Drain Pipes. Inclination. Isolating Valves. Water Hammer. Branches. Pipe Joints. Spigot. Socket. Screw Flanges. Jointing Rings, etc. Superheated Steam. Pipe Supports. Bracket Suspension. Pillars. Plain Brackets. Vibration. Anchor Bracket. Tables of Dimensions. Erection of Pipes. Templets for Pipes. Taper Joint Rings. Extensions to Existing Pipes. Pipe Bending. General Arrangements. Relative Position of Boilers, Engines and Superheaters. Size of Valves. Boiler Output. Modern Boiler Capacity. Valves, Globe, Angle, Fullway or Gate. Bye-Pass Relief. Reversed Flexible Seats. Insolation. Materials. Drainage. Steam Traps. Junction Pieces and Flanges. Weights. Construction. Materials. Flange Dimensions. Bolt Pitch. Standards. Separators.

# Mechanical Appliances

## Mechanical Movements

## and Novelties of Construction

An Encyclopedia of Mechanical Movements and Mechanical Appliances, including many Novelties of Construction used in the practical operation of the Arts, Manufactures, and in Engineering. For Engineers, Draughtsmen, Inventors, Patent Attorneys and all others interested in Mechanical Operations.

By GARDNER H. HISCOX, M.E.

Author of "Gas, Gasoline, and Oil Engines," "Compressed Air," etc., etc.

*Being a supplementary Volume to the Author's work entitled,*  
MECHANICAL MOVEMENTS, POWERS AND DEVICES.

400 pages.      About 1,000 Illustrations.

12s. 6d. net.

### CONTENTS:

Mechanical Power Lever. Transmission of Power. Measurement of Power. Springs. Generation of Power. Steam. Steam Power Appliances. Explosive Motor Power and Appliances. Hydraulic Power and Appliances. Air-Power Motors and Appliances. Gas and Gas-Air Devices. Electric Power and Devices. Navigation, Vessels and Marine Appliances. Road and Vehicle Appliances. Railway Devices and Appliances. Gearing and Gear Motion. Motion and Controlling Devices. Horological Time Devices. Mining Devices and Appliances. Mill and Factory Appliances and Tools. Textile and Manufacturing Devices. Engineering and Construction. Miscellaneous Devices. Draughting Devices. Perpetual Motion.

The ten editions through which the first series "Mechanical Movements" has passed is more than a sufficient encouragement to warrant the publication of a second, more special in scope than the first, inasmuch as it deals with the peculiar requirements of various arts and manufactures,

ARCHIBALD CONSTABLE & CO. LTD.

---

# Mechanical Movements Powers, Devices, and Appliances

By GARDNER D. HISCOX, M.E.

Author of "Gas, Gasoline, and Oil Vapor Engines."

Tenth Edition. Demy 8vo.

Over 400 pages, 1,649 Illustrations and Descriptive Text.

12s. 6d. net.

This work embraces an illustrated description of the greatest variety of mechanical movements and devices in any language. Commencing with the simple resolution of forces, and the elements of the lever in its various forms and applications, with a notation that is easily resolved by any ordinary arithmetician. It extends the notation and the resolution of power to the screw, worm gear, tackle blocks and to the measurement of power by the prony brake and various kinds of dynamometers.

It illustrates fully the leading devices for the transmission of power and its measurement. Generators and transmitters of steam power; steam appliances; gas motors and valve gears of steam and gas Engines. Hydraulic power and devices for the measurement of hydraulic effects. Filtration and water supply. Atmospheric power and motor devices, blowers, air-compressors and water-lifts. Pneumatic tools. The principles of construction in electric appliances for power, lighting, heating and welding. The names and rig of sailing vessels of all kinds; rope-knots, screw propellers. Road appliances; the horseless carriage, tricycle and bicycle movements. Intermittent, elliptic and epicyclic gearing and gear movements. The Fergusson paradox and its kind; planetary gear. Ratchet motions and devices controlling motions of all kinds. Cranes and counting devices, curious crank and eccentric motions, universal joints of many designs. Clock and watch movements and devices. Mining-hoisting and conveying devices. Separating of ores and dredging. Shop and factory appliances, tools, standard screw threads. Mills and mill appliances; roofs, bridges, railway devices, locomotives. Gas controlling and operating devices. Acetylene generators, lamps and burners. Arms and ordnance. Combining in all a most useful encyclopædia of the mechanical arts. A book for inventors, students, draughtsmen, mechanics, engineers, electricians, and all interested in any way in the devising and operation of mechanical works.

---

## Smoke Prevention

By W. H. BOOTH AND J. B. KERSHAW, F.I.C.

Demy 8vo. Fully Illustrated.

6s. net.

### CONTENTS:

Preface. Introduction. The Chemistry of the Combustion Process. Present Methods of Burning Fuel and their Defects. Improved Methods

# Hardening, Tempering, Annealing, and Forging of Steel

*A Treatise on the Practical Treatment and Working of  
High and Low Grade Steel*

By JOSEPH V. WOODWORTH

Demy 8vo. 288 pages. With 201 Illustrations.

10s. net

## CONTENTS :

Selection and Identification of Steel. The Treatment of well-known Brands. The Effect of Heat. Annealing Processes. The Heating and Cooling of Steel. The Use of Gas Blast Furnaces and Heating Machines. The Hardening of Steel—in water, brine, oil and solutions. Special Processes. Tempering—by colours, in oil, on hot plates, by thermometer, in hot water, in the sand bath, by special methods. Case Hardening Processes. The Use of Machinery Steel for Cutting Tools. Hardening and Tempering. Milling Cutters and similar Tools. Small Tools. Dies and Press Tools. Forging and Welding. Grinding. Miscellaneous Methods. Processes. Kinks, Pointers, Tables, etc.

## Dies

### Their Construction and Use for the Modern Working of Sheet Metals

By JOSEPH V. WOODWORTH.

Demy 8vo. 384 pages. With 505 Illustrations.

12s. 6d. net.

A treatise upon the designing, constructing and use of tools, fixtures and devices, together with the manner in which they should be used in the Power press, for the cheap and rapid production of Sheet-metal parts and articles. A complete treatise on the subject and the most comprehensive and exhaustive one in existence, and one that diemakers, machinists, tool-makers or metal working mechanics cannot afford to be without.

## CONTENTS :

The Construction and Use of "Single" or Blanking Dies, and "Double" or Piercing and Blanking Dies. Simple Dies for Use in the Machine Shop. "Gang" and "Follow" Dies. How to adapt and use them. The Adaptation and Use of Simple Dies and Press Fixtures for the Economic Production of Sheet-Metal Parts. Bending and Forming Dies and Fixtures. Perforating Dies and Processes for Thin and Heavy Stock. Curling, Wiring and Seaming Processes. Drawing Processes for Sheet-Metal Shells. Coining Processes. Punches and Presses for Operations on Heavy Stock. The Fecing of Sheet-Metal to Dies. Lubrication of Press Work. Annealing Tool Steel, and Hardening and Tempering Processes for Press Tools, Miscellaneous Instructions on the Proper Use of Files. Miscellaneous

ARCHIBALD CONSTABLE & CO. LTD.

---

SECOND IMPRESSION.

## Practical Electro-Chemistry

By BERTRAM BLOUNT, F.I.C., F.C.S., Assoc. Inst. C.E.

Consulting Chemist to the Crown Agents for the Colonies.

Demy 8vo. Fully Illustrated.

15s. net.

CONTENTS :

Section I., General Principles. Section II., Winning and Refining of Metals by Electrolytic Means in Aqueous Solution. Section III., Winning and Refining Metals in Igneous Solution. Section IV., Winning and Refining Metals and their Alloys in the Electric Furnace : Carbides, Borides and Silicides. Section V., Electro Deposition. Section VI., Alkali, Chlorine and their Products. Section VII., Electrolytic Manufacture of Organic Compounds and Fine Chemicals. Section VIII., Power.

---

## Acetylene

By VIVIAN B. LEWIS, F.I.C., ETC.

Professor of Chemistry Royal Naval College, Greenwich,  
Chief Superintending Gas Examiner to the Corporation of the City of London, etc.

About 1,000 pages and 228 Illustrations.

32s. net.

CONTENTS :

The History of Acetylene from its Discovery to the Introduction of Commercial Acetylene. The Preparation of Acetylene. Acetylene and its Properties. The Chemical Re-actions of Acetylene. The Electric Furnace and its Application to the Manufacture of Calcium Carbide. The Manufacture, Properties, and Impurities of Calcium Carbide. The Generation of Acetylene. The Impurities of Commercial Acetylene and the Processes adopted for their Removal. The Generation of Light and Power from Acetylene. The Utilisation of Diluted Acetylene. The Analysis of Material for Carbide. Manufacture of Carbide and of Acetylene. Legal Enactments in Force in Various Countries with Regard to the Use of Acetylene. English Patents, Appendix of Useful Data, Index.

---

## The Art of Illumination

By LOUIS BELL, Ph.D.

Demy 8vo. 345 pages. Fully Illustrated.

10s. 6d. net.

CONTENTS :

Light and the Eye. Principles of Colour. Reflection and Diffusion. The Materials of Illumination. Illuminants of Combustion. Incandescent Burners. The Electric Incandescent Lamp. The Electric Arc Lamp. Shades and Reflectors. Domestic Illuminations. Lighting Large Interiors. Street and Exterior Illumination. Decorative and Scenic Illu-

ARCHIBALD CONSTABLE & CO. LTD.

---

# Engine Tests and Boiler Efficiencies

By J. BUCHETTI

Edited and Translated by ALEXANDER RUSSELL, M.I.E.E. etc.  
Fully Illustrated.

10s. 6d. net.

CONTENTS :

Indicators. Continuous Indicators. Recording Indicators. On Mounting Indicators. Travel Reducing Gear. Theory of the Indicator. The Study of Diagrams. Testing Oil and Gas Engines. Measurement of Indicated Horse Power. Use of a Dynamo as a Break. Steam Turbines. Properties of Steam. Evaporation. Combustion. Steam Trials. Appendices.

---

## The Economic and Commercial Theory of Heat Power Plants

By ROBERT H. SMITH, A.M.I.C.E., M.I.M.E., M.I.E.E., ETC.

Prof. Em. of Engineering and Mem. Ord. Meiji.

24s. net.

This treatise insists, from the Physical and Industrial points of view, upon the paramount dominance of the TIME-ELEMENT in all thermodynamic action ; upon the dependence of the MODULUS OF ELASTICITY upon the time-element ; upon IRREVERSIBILITY as arising from it ; and upon the supreme engineering need of concentrating attention upon resilience, due to volume and pressure as being the quality of primary utility in mechanics, while temperature is of secondary, although important, influence. It proposes a new coefficient, called the Dynothermic coefficient, giving the ratio of the quantity of Resilience produced by Thermal action to the quantity of Thermal action involved. It then investigates the ratio in which this Resilience may be utilized.

From the Commercial point of view, it demonstrates how the endeavour after increased thermodynamic efficiency is properly limited by the concurrent increase of costs in capital charges, working expenses, and slowness of production. It investigates in detail graphic and other methods of estimating the various limits and combinations of limits which result in maximum all-round commercial economy, and explains the true Commercial Economy Coefficient. It contains numerous tables and diagrams illustrating these methods and the resulting limits. It contains also many diagrams of thermal and dynothermic properties of materials, especially those of steam.

---

## O'Gorman's Motor Pocket Book

By MERVYN O'GORMAN, M.Inst.C.E., ETC.

Limp Leather Binding.

7s. 6d. net.

ARCHIBALD CONSTABLE & CO. LTD.

---

# Motor Vehicles and Motors

THEIR DESIGN, CONSTRUCTION, AND WORKING, BY STEAM, OIL, AND ELECTRICITY

By W. WORBY BEAUMONT, M.INST.C.E., M.INST.M.E.,  
M.INST.E.E.

*VOL. I. SECOND EDITION*

42s. net.

About 600 pages and more than 450 Illustrations and Working Drawings.

This volume deals with the achievements of the past and the present ; namely, the active period from 1824 to 1838 ; the subsequent intermediate period ; and, finally, the modern and recent great development. The greater part of the book deals with the modern and recent motor vehicles, dating from 1884 to 1900, and for this purpose several hundreds of new working drawings have been specially made and reproduced with the greatest care, which convey precise information of the design and construction of Vehicles of which thousands have now been made, chiefly abroad.

Nearly all these drawings are reproduced to scale dimensions in British and metric measures. Oil and spirit motor vehicles, and their motors, occupy the greater part of the work, as these are by far the more numerous and most successful for the purposes for which they are built. Careful descriptions and explanations are given of these with all their details and connections mechanical and electrical. Elaborate analyses are given of the results of all the organized trials which have been made with vehicles of various kinds.

Complete drawings are also given of the most representative types of electric motor vehicles, and particular attention has been given to the electrical controllers and the various methods of electrically varying speeds, together with electrical connections.

---

# Motor Vehicles and Motors

*VOL. II.*

By W. WORBY BEAUMONT, M.INST.C.E., M.INST.M.E.,  
M.INST.E.E.

Fully Illustrated.

# Tables of Multiplication, Division and Proportion

*EXTENDED TO 100 BY 160*

For the READY CALCULATION of Quantities and Costs,  
Estimates, Invoice Prices, Interests and Discounts,  
Weights and Strengths, Wages and

## WAGE PREMIUMS

Accompanied by full explanations and examples of how to use the Tables by direct inspection and by interpolation. All 2-figure and many 3-figure factors are dealt with by direct inspection, while all 4-figure and many 6-figure factors are accurately manipulated by help of a simple mental interpolation. The Tables are primarily intended to aid in the calculation of WAGES under the new PREMIUM and BONUS Systems. They are also very useful in finding DISCOUNTS larger than are covered by the ordinary Interest Tables. They obviate mental fatigue in all technical and industrial calculations, simple inspection without interpolation giving all results obtainable by the common Slide-Rule 10 inches long; while with interpolation 4-place accuracy and approximation in the 5th significant figure is obtained, which is yielded only by Fuller's Spiral Rule with Scale 42 feet long.

The tables are designed for the use of TECHNICAL SCHOOLS as well as for TECHNICAL and PROFESSIONAL OFFICES.

They are mounted on Linen and folded in 16 narrow pages in a form facilitating rapid use, and are easily carried in the pocket.

By ROBERT H. SMITH, A.M.I.C.E., M.I.M.E., M.I.E.E., etc.,

Prof. Em. of Engineering and Mem. Ord. Meiji.

6s.

---

## Entropy

By JAMES SWINBURNE, M.Inst.C.E., M.I.E.E., etc.

Illustrated with Diagrams.

4s. 6d. net.

### CONTENTS :

Introduction. Origin of Common Error as to Entropy. Personal. Irreversible Changes not Considered Properly. Entropy. Work Heat and Waste. What Entropy is Not, and What It Is. Three Kinds of Perpetual Motion. Three Laws of Thermodynamics. Reversible Cycle. Entropy as a Factor of Incurred Waste. Reversibility. Localisation of Entropy. More Convenient Definition of the Entropy of a Body. The Temperature Entropy Diagram. Irreversible of Free Expansion. Difference of Areas of  $\theta \phi$  and  $p v$  Diagrams. Ungained Work. Diagram for Steam. Real Factors of Heat. Conduction. Movement of Entropy. Conduction of Heat. Volume. Growth of Entropy in Conduction. Unit of Entropy. Physical Meaning of Entropy. Conclusion. Appendix. The Reversibility of Thermodynamics. Present or Orthodox Treatment.

ARCHIBALD CONSTABLE & CO. LTD.

---

# Refuse Destructors and Power Production

By F. GOODRICH

Demy 8vo. Fully Illustrated.

21s. net.

## CONTENTS :

Introduction. Refuse Tipping on Land. Refuse Tipping at Sea. Systems of Charging Refuse into Cells. British Destructors Described and Illustrated. Labour Cost. Clinkering. The Residuum and Methods of Disposal. Destructors Combined with Electricity Works. Destructors Combined with Sewage Works. Destructors Combined with Water Works. Destructor Sites. The Comparative Advantages of Steam Jet Blowers and Fans. Special Points in Design for Securing and Maintaining High Temperature and Steady Steaming. The Comparative Advantages of Various Types of Steam Boilers for Destructive Purposes. Refuse Destructors in the Metropolitan Boroughs, London. Refuse Destructors in England and Wales. Refuse Destructors in Scotland and Ireland. Refuse Destructors Abroad. Concluding Remarks. •

---

# Small Dust Destructors for Institutional and Trade Refuse

By F. GOODRICH

Demy 8vo.

4s. net.

## CONTENTS :

Introductory. Isolation Hospital Refuse Destructors. Institutional Refuse Destructors Described and Illustrated. Portable Destructors. American Practice. The Disposal of Trade Refuse.

---

# Elementary Studies in Chemistry

By JOSEPH TORREY

Instructor in Harvard University.

Crown 8vo.

ARCHIBALD CONSTABLE & CO. LTD.

---

# Electricity and Matter

By J. J. THOMPSON, D.Sc., LL.D., Ph.D., F.R.S.

Price 5s. net.

## CONTENTS:

Representation of the Electric Field by Lines of Force. Electrical and Bound Mass. Effects due to the Acceleration of Faraday Tubes. The Atomic Structure of Electricity. The Constitution of the Atom. Radio-activity and Radio-active Substances.

---

# The Discharge of Electricity through Gases

By PROFESSOR J. J. THOMSON, F.R.S.

Crown 8vo.

4s. 6d. net.

---

# The Engineer in South Africa

By STAFFORD RANSOME, M.Inst.C.E.

Demy 8vo. Fully Illustrated.

7s. 6d. net.

## CONTENTS:

Introduction. Industrial Geography. The Cost of Living and Traveling. Politics and their Bearing on the Industrial Question. The Coming Business "Boom." The Prospects of Employment. The Labour Question. Intercolonial Relations. The British Manufacturer. The Competition in Gold Mining Machinery. The Struggle for Life in Rhodesia. Possibilities in the Orange River Colony. A Business Policy for Manufacturers. The Theory and Practice of the Railways. The Harbours of Cape Colony. Durban Harbour. Diamond Mining in Kimberley. Underground at the Rand Mines. The Treatment of Gold Ore. Well Boring in Cape Colony. Irrigation: A Disappointing Situation.

---

# The Internal Wiring of Buildings

By H. M. LEAF, M.I.M.E., ETC.

Fully Illustrated.

3s. 6d. net.

Revised and Enlarged, with a chapter on Electricity Meters and the New Rules of the Institution of Electrical Engineers.

## CONTENTS:

Introduction. Electric Cables. General Arrangement of Conductors and Cut-outs in Buildings. Jointing and Wood Casing System of Wiring. Metal Tube and Concentric Systems of Wiring. Electrical Accessories. Testing. Costs and Estimates for Wiring. Electrical Meters and Systems of Charging for Electric Current. Regulations of Insurance and Electric

## **Electric Furnaces**

By **J. WRIGHT**

Demy 8vo. With 57 Illustrations.

8s. 6d. net.

CONTENTS:

Introductory and General. Efficiency of the Electric Furnace. Arc Furnaces. Resistance Furnaces. Carbide Furnaces. Smelting and Ore Reduction in the Electric Furnace. Distillation of Metals. Electrolytic Furnaces. Laboratory Furnaces and Dental Muffles. Tube Furnaces. Glass Manufacture in the Electric Furnace. Electrodes and Terminal Connections. Furnace Thermometry.

---

## **Electric Traction Engineering**

By **H. F. PARSHALL** and **H. M. HOBART.**

Fully illustrated.

---

## **Modern American Machine Tools**

By **C. H. BENJAMIN.**

Fully illustrated.

---

## **Electricity in Town and Country Houses**

By **PERCY E. SCRUTTON.**

Third Edition. Crown 8vo. Fully Illustrated.

2s. 6d.

---

## **Art-Enamelling upon Metals**

With many Illustrations and Two Coloured Plates.

By **H. H. CUNYNGHAME, F.R.S.**

Second Edition. Large Crown 8vo.

6s. net

ARCHIBALD CONSTABLE & CO. LTD.

---

# National Engineering and Trade Lectures

s. *"To Stimulate and Expand British Trade."*

Assisted by the Board of Trade and other Government Departments,  
various Colonial Governments, British Consular Officers, Chambers of  
Commerce, Employers' Federations, Technical Institutions, etc.

EDITED BY B. H. MORGAN.

Fully Illustrated.

6s. net per volume.

Vol. 1.—BRITISH PROGRESS IN MUNICIPAL ENGINEERING.  
A series of Three Lectures, by WILLIAM MAXWELL, Assoc.  
M.Inst.C.E.

Vol. 2.—BRITISH PROGRESS IN PUMPS AND PUMPING ENGINES.  
By PHILIP R. BJORLING, Consulting Engineer, Author of  
"Pumps and Pump Motors."

Vol. 3.—BRITISH PROGRESS IN GAS WORKS PLANT AND MACHINERY.  
By C. E. BRACKENBURY, C.E., author of "Modern Methods  
of Saving Labour in Gas Works."

OTHER VOLUMES IN PREPARATION.

---

Messrs. ARCHIBALD CONSTABLE & Co. call the attention of the public to the

## Repertoire General du Commerce

A Series of ENCYCLOPÆDIAS OF INTERNATIONAL TRADE, of which  
they are Sole Agents.

Each volume is printed in French and the language of the country dealt  
with in parallel columns, and forms an invaluable reference Encyclopædia  
of the trade and trading conditions existing between France and that  
country.

|                        |    |           |                           |
|------------------------|----|-----------|---------------------------|
| UNITED STATES—FRANCE   | .. | 21s. net. | Second Edition now ready. |
| ITALY—FRANCE           | .. | 10s. net. | Now ready.                |
| GREAT BRITAIN—FRANCE   | .. | 21s. net. | In the press.             |
| FRENCH COLONIES—FRANCE | .. | 25s. net. | In the press.             |

*Other Volumes in preparation.*

# **Compressed Air**

**Its Production, Uses and Applications**

By **GARDNER D. HISCOX, M.E.**

Author of "Mechanical Movements, Powers, Devices," Etc.

Demy 8vo. 820 Pages. 545 Illustrations.

20s. net.

A complete treatise on the subject of compressed air, comprising its physical and operative properties from a vacuum to its liquid form. Its thermodynamics, compression, transmission, expansion, and its uses for power purposes in engineering, mining and manufacturing work. Air compressors, air motors, air tools, air blasts for cleaning and painting. The sand blast, air lifts for pumping water, oils and acids, submarine work, aeration of water, railway appliances and propulsion. The air brake, pneumatic tube transmission, refrigeration and cold rooms. The hygiene of compressed air, its liquefaction and phenomena, including forty tables of the physical properties of air, its compression, expansion and volumes required for various kinds of work, and a list of patents on compressed air from 1875.

## **CONTENTS :**

Historical Progress of Air Work. Physical Properties, with Six Tables of Comparative Volume of Air Absorbed by Water. Volumes and Weight of Dry and Saturated Air. Absolute Pressure for Height of Barometer with Moisture. Weight of Vapour per cubic foot of Saturated Air at Various Temperatures. Temperature of Boiling Water at Various Heights, with Barometric and Gauge Pressure. Amount of Water Condensed by Air Compression and Cooling, etc., etc. Air in Motion and its Force. Table of Velocity and Pressure, with Examples, anemometers, evaporation of Water by Air. Air Pressures below Atmospheric Pressure, Air Pumps and their work, with Table of Evaporation. Commercial Utility of a Vacuum with examples. Drying in Vacuo. Salt Making, Siphon and its Work. Vacuum Excavator. Flow of Air into a Vacuum, with Formulas. Flow of Air under Pressure from Orifices into the Atmosphere, with Tables of Velocities under Varying Pressures and Conditions and in Cubic feet per minute, with Formulas and Examples. The Air Jet Nozzle. The Power of the Wind. Wind Mill and its Work, with Table. Electric Generation. • Low-Pressure Air Work. The Box Kite. Gold Mining, Rotary Blowers, Gasoline and Air Braziers, Compressed Air for Blowing Glass, etc. Isothermal Compression and Expansion of Air, its law, with Diagrams and Formulae. Thermodynamics. Tables of Specific Heats. Absolute Temperatures. Its Absolute Zero. Volume, Pressure and Density at Various Temperatures. Formulas, and Figured Examples. Law of Expansion and Contraction by Heat and Cold with Comparative Volumes. Adiabatic Compression and Expansion, with Diagrams, Formulas and Algebraic Expressions, with Figured Solutions. Extensive Air

# ARCHIBALD CONSTABLE & CO. LTD.

---

Values. Actual Work of the Compressor with Tables of Mean Pressure; Load Foot Pounds of Work for Compressing Air, Diagrams of Isometric and Adiabatic Work of Compression, with Formulas and Worked-out Examples of Foot Pound Work of Compression. Multi-Stage Air Compression. Tables. Power Lost, One, Two and Four Stage. Intercoolers. Three Stage Work. Four Stage, with diagrams. And Foot Pound Work, Loss of Power in Stage Compression, Aftercoolers, Foot Pound Work of Air Compression in Different Stages. Horsepower for Compressing Air at Different Pressures and Stages. Expansion of Compressed Air and the Work of the Motor, with Tables of Cut-off Values and Clearance. Tables of Ratios, Pressures and Temperatures in Motor Cylinder, with the Mean and Terminal Pressures. Foot Pound Work of Expansion, Measurement of Expansion Card, Formulas for Expansion in Cylinders and Figured Results for Mean and Terminal Pressure with Method for Computing the Tabulated Values. Transmission of Power by Compressed Air. Tables, Diameters, and Areas of Pipe with Coefficient and Multipliers with Formula Table of Transmitted Volumes under various Pressures, from 45 to 105 pounds. Table, Loss of Pressure by Friction, with Formula, Gauge Pressures and Corresponding Density. Formulas and Figured Examples in Transmission of Air Power. Reheating and its Work, with Illustrated Forms of Reheaters and Figured Values of the work of Reheating Compressed Air, and its Cost. Coloric or Hot Air Engine and Air Motor, Theory and Work. The Compressed Air Motor and its Work. The Paris Plant with Diagrams of Compressor and Motor Work. Efficiencies of Air Plants. A Hydraulic Compressor Plant and its Efficiency. Efficiency of Compressed Air at High Altitudes. The Use of Compressed Air with Motors, and Numerous Tables for the use of Compressed Air for all purposes, Driving Hoisting Engines, Pumping Water, etc. Capacity of Compressors. Measurement of Compressed Air by Meter. Air Compressors. Various Types, the Trompe, Hydraulic and early types of Piston Compressors. Diagrams Illustrating Forms and Principles of Single, Duplex and Compound Types. Air Compressors of various makes Illustrated and Described. The Ingersoll-Sergeant, Single Piston Inlet, Compound and Four Stage Types. The High Pressure Bottle. Laidlaw, Dunnington and Clayton Type. Guild and Garrison, Knowles. Types of Norwalk Iron Works, E. P. Allis Co., McKiernan, Merrill, Curtis & Co., N. Y. Air Comp. Co. Types of Rand Drill Co., Marsh, St. Louis Steam Engine Co., Phila. Engineering Works, D'Auri, Stillwell-Bierce & Smith Vaile Co., Nordberg Mfg. Co. Gasoline Type of Fairbanks-Morse Co. Kerosene Oil Type. Explosions in Cylinders. Compressed Air in Mining, Rock Drills. Types of the Ingersoll-Sergeant Drill Co. Bar Channeller. Coal Cutter. Rand Drill Co. Air Table. Chicago Rock Drill. McKiernan, Phillips Rock Drill Co. Leyner. Table. Air for Operating. Impact or Force of Percussion in Hammers and Drills. Pneumatic Tools. Air Hammers. Ross. Q & C. Duplex. Little Giant. Boyer. Tilden. Chicago Pneumatic Tool Co. Hold-on. Hammer in Sculpture. Fret Saw. Machine Shop. in Shipbuilding, in Structural Work, in Riveting. Compression Riveters. In Boiler Work. Air Drills and their Work. Haesler. Little Giant. Boyer. Whitelaw. Phoenix. Chicago. Drills and their Work. Q. & C. Hammers. Yoke Riveters. Stationary Riveters. Piston Drills. Standard Railway Equipment Co. Hammer and Drills. Phila. Pneumatic Tool Co. Hammers. Hold-on. Rammers. Sand Sifter. Brush. Moulding and Welding Machine. Drift Bolt Driver. Stow Flexible Shaft Co. Rotary Drills. Drills and Hoists of the Empire Engine and Motor

# ARCHIBALD CONSTABLE & CO. LTD.

---

Current Meter and Recorder. Compressed Air in Railway Service. Me-  
karski, Hardie and Judson Systems. 125th St. and 28th St. Cars. Air  
Card. Motors and Trucks. Reducing Valve. Locomotives of American  
Air Power Co. Cost of Compressed Air. Baldwin and H. K. Porter Co.  
Compressed Air in R. R. Signalling Interlocking System. Pneumatic  
Baggage Handler. Gates. Dumping Cars. Telegraph. Air Brake and  
its Work. Car Signal System. Air Brake on Trolley Cars. Pneumatic  
Bell Ringer. Pneumatic Sheep Shearing. Compressed Air in a Saw Mill.  
Whistles. Basket Making. Air Brush. Fog Signals. Raising Sunken  
Vessels. Submarine Exploration. Dredging. The Compressed Air Blast.  
Sand Blast and its Work. Sand Blast Machines. Sand Blast Ornamenta-  
tion. Engraving. File Sharpening. Air Blast in Painting. Dusting  
and Cleaning. Carpet Cleaning. Compressed Air in the Bessemer Con-  
vertor and Blast Furnace. In the Rolling Mill. For Blasting. In  
Caisson Sinking. Pneumatic System of Tube Transmission. Postal  
System. Carrier Lodgment Finding. English Tube System. Store and  
Office System. Compressed Air in Warfare. Dynamite Guns and their  
Work. Loading. Turret Work. Steering, Cooling and Ventilating.  
Compressed Air for Raising Water Pohle Air Lift. Various Systems and  
Efficiencies. Compressed Air Water Works. Compound Air Lift. Multi-  
Stage Air Lift. Direct Air Lift, Various Systems. Economy of Com-  
pressed Air for Pumping. For Sewage Discharge. For Aerating Water.  
Cyanide Process for Extracting Gold. Wood Vulcanizing. Ageing of  
Liquors. Refrigeration by Vacuum. By Compressed Air. The Earliest  
Ice Machine. English Machines. Allen Dense Air Machine. Cold Stor-  
age and Cold Rooms by Direct Expansion of Compressed Air. Air Cooled  
Water for Drinking. Hygiene of Compressed Air. Physiological Effects  
on Workers. The Caisson Disease and Effects. Liquid Air and its  
Generation. Apparatus of Various Experimenters. Plants of Tripler and  
The General Liquid Air Co. Liquid Air Phenomena. List of Patents on  
Compressed Air from 1875.

---

## Gas Engine Construction

A Practical Treatise

SECOND EDITION

By HENRY V. A. PARSELL, Jr., Member A. I. Electrical En-  
gineers, and ARTHUR J. WEED, Mechanical Engineer.

Demy 8vo. Fully Illustrated. 304 Pages.

10s. 6d. net.

### CONTENTS:

How the Gas Engine Works. The Four Classes of Engines. Design of  
a Small Gas Engine. Patterns. Special Tools. Cylinder. Piston.  
Connecting Rod. Bearings. Side Rods. Bed Plate. Fly Wheels and  
Shaft. Cylinder Head. Inlet Valve. Exhaust Valve. Valve Gearing.  
Governor. Igniter. Assembling. Regulating and Starting. Carburetors.

ARCHIBALD CONSTABLE & CO. LTD.

---

# Gas, Gasoline and Oil Engines

*TENTH EDITION, 1904, REVISED AND ENLARGED*

By GARDNER D. HISCOX, M.E.

Author of "Mechanical Movements, Powers, Devices, and Appliances,"  
"Compressed Air in all its Applications," etc.

Demy 8vo. 413 pages. 312 Illustrations and Diagrams.

10s. 6d. net.

An up-to-date book on Explosive Motors for all power purposes. The most complete in Theory and in Practical details of construction and operation. Explosive Motors for Stationary, Marine and Vehicle Power are fully treated, together with illustrations of their parts and tabulated sizes, and extended notes on their care and running. Ignition is fully explained and illustrated, with ample notes for Testing for economy and power, and the erection and installation of power plants.

## CONTENTS :

Introductory. Historical. Theory of the Gas and Gasoline Engine. Utilization of Heat and Efficiency in Gas Engines. Heat Efficiencies. Retarded Combustion and Wall-Cooling. Causes of Loss and Inefficiency in Explosive Motors. Economy of the Gas Engine for Electric-Lighting. The Material of Power in Explosive Engines. Gas, Petroleum Products, and Acetylene Gas, Alcohol. Carburetters, Atomizers and Vapour Gas for Explosive Motors. Cylinder Capacity and Dimensions of Gas and Gasoline Engines. Mufflers on Gas Engines. Governors and Valve Gear. Ignitors and Exploders. Hot Tube, Electric, Jump Spark. Hammer Spark, Induction Coil and Dynamo. Cylinder Lubrication. On the Management and Running of Explosive Motors. Pointers on Explosive Motors. The Measurement of Power by Prony Brakes, Dynamometers and Indicators, Speed Measure. Explosive Engine Testing. Types of the Explosive Motors. Various Types of Stationary Engines, Marine and Vehicle Motors. United States Patents on Gas, Gasoline and Oil Engines, and their Adjuncts, 1875, to July 1, 1902, inclusive.

# Reinforced Concrete Construction

By A. W. BUEL and C. S. HILL.

Fully Illustrated.

21s. net.

## CONTENTS :

Economic Use and Properties of Reinforced Concrete. Beams and Theories of Flexure. Columns. Retaining Walls, Dams, Tanks, Conduits and Chimneys. Tests and Designs of Arches. Foundation Construction. Building Construction. Bridge and Culvert Construction. Conduit Con-

ARCHIBALD CONSTABLE & CO. LTD.

---

# Liquid Air and the Liquefaction of Gases

By T. O'CONOR SLOANE, A.M., E.M., Ph.D.

Second Edition. Many Illustrations.

10. 6d. net.

This book gives the history of the liquefaction of gases from the earliest times to the present. It tells what may be expected from it in the near future. It is a logical explanation and application of the principles of liquefaction, a history of the theory, discovery and manufacture of liquid air, and it renders simple one of the most perplexing chemical problems of the century.

## CONTENTS :

Physics. Heat. Heat and Gases. Physics and Chemistry of Air. The Royal Institution of England. Michael Faraday. Early Experimenters and their Methods. Raoul Pictet. Louis Paul Cailletet. Sigmund von Wroblewski and Karl Olszewski. James Dewar. Chas. E. Tripler. The Joule-Thompson Effect. The Linde Apparatus. The Hampson Apparatus. Experiments with Liquid Air. Some of the Applications of Low Temperature.

---

# Cotton Seed Products

A Manual of the Treatment of Cotton Seed for its  
Products and their Utilization in the Arts

By LEIBERT LLOYD LAMBORN,

Member of the American Chemical Society ; Member of the Society of Chemical Industry.

With 79 Illustrations and a Map.

12s. 6d. net.

## CONTENTS :

The Cotton Plant. The Cotton Seed Industry. Summary of Procedure of Utilization of Cotton Seed. Cotton Seed. Cotton Seed Products. Manufacture of Oleo Margarine and Lard. Compound. Manufacture of Soap and Soap Powder. Cotton Seed. Meal and Cotton Seed. Hulls

# Shop Kinks

By ROBERT GRIMSHAW  
SECOND EDITION

A Book for Engineers and Machinists  
With 222 Illustrations.

10s. 6d. net.

The book is indispensable to every machinist or practical engineer.

## CONTENTS :

Lathe Speed. Lead Screw. Grinding Lathe Centres and Spindles. Cut-off Centres. Table Centres. Centres Right and Wrong. Testing Centres. Alignment of Centres. Setting Lathes. Backing-off Cutters. Bell Chucks. Spring Chucks. Drivers and Dogs. Milling Vise. Steady Rests. Tool Clamps. Tool Holders. Gauges. Centre Drilling. Combination Drill and Counter Sink. Centre Reamer. Centring Devices. Chasing. Chilled Roll Turning. Curve Boring. Turret Lathe Tools. Special Tool Holder. Fluting Reamers. Squaring up Connecting Rods. Turning Vulcanized Fibre. Turning and Key Seating Shafting. Counter Balancing Cranks. Slide Rest. Making Reamers. Step Reamer. Standard and Adjustable Reamers. Planers, Quick Return, Open Side, and Holding Work. Planer Chucks. Hollow Planing and Large Work. Planer Parallels and Gage Blocks. Cutting Gears on Planer and Slotter. Boring Cylinders and Large Holes. Boring Bars. Work on the Drill Press. Clamping Jig and Clamps. Starting and Centring Drills. Drilling Hard Steel. Drilling Glass. Splicing Drills. Long Drills. Twist Drills. Drill Speed. Drilling in Water Pipes. Drilling Square Holes. Cutting Teeth in large Quadrants. Milling Cutters, Solid and Sectional. Gang Milling Cutters. Speed of Milling Cutters. Emery Wheels and their Work. Grinding Gages. Grinding Rolls and Balls. Metal Saws and Cold Sawing. Punches, Centring and Spiral Taps. Plain and Collapsing. Frictionless Taps. Dies and Screw Cutting. Bending Copper Pipes. Riveting. Callipers. Measuring Screw Threads. Broaching Keys. Solid, Split, Taper. Cutters. Set Screws. Gaging Worm Threads. Jigs and Special Tools. Files and File Sharpening. Bevel Filing. Finishing Clamps. Pattern Making and Finishing. Chucks for Wool. Steam Hammers. Air Blasts. Moulding and Casting. Loan Moulds. Core Making. Brass Furnace and Casting. Chilled Castings. Hardening and Tempering Tool Steel and Springs. Hardening Dies and Saws. Malleable Castings. Annealing Steel. Sketching and Drawing. Standard Hatchings. Sun Prints and Blue Prints. Designing. Cast Iron Beams and Columns. Piston and Rod. Filletting. Oscillating Valves. Locomotive Drivers. Nuts Working Loose. Cost of Work. Calculating Horse Power of Engines. Safety Valve. Centre of Gravity. Atmospheric Pressure. Driving Blocks. Drift for Arbors. Shrinkage Gage. Cranes. Derricks. Hoisting. Shop Lighting. Lining up Shafting. Pulley Balancing Hanging Clutch Pulley. Loose Pulleys. Keying Pulleys. Split Pulleys. Belt Shifters. Belt Handler. Gearing and Sprocket Wheels. Bevel Gear Teeth. Raw Hide Gears. Figuring Gear Teeth. Laying Out Gearing. Bearings. Ball Bearings. Turbine Steps and Step Bearings. Lubrication. Annunciators. Tool Lists. Scraping Fits. Straightening

**ARCHIBALD CONSTABLE & CO. LTD.**

---

# **Plat and Profile Book for Civil Engineers and Contractors**

By **H. F. DUNHAM**

**Flexible Leather Binding.**

**4s. net.**

Containing 28 pages of Profile Paper and handy Tables for Excavation and Embankment, Strength of Material, Size of Sewers for Various Slopes and Drainage Areas, and information for making Estimates in Electric Construction.

---

# **Engineering Contracts and Specifications**

By **PROFESSOR J. B. JOHNSON**

**556 pages.**

**12s. net.**

Including a Synopsis of the American Law of Contracts; Engineering Specifications and Accompanying Documents; Specific, Descriptive, or Technical Clauses in Specifications, including Illustrative Specifications for Excavations and Embankments; Cement, Mortar, Concrete and Masonry; Street Pavements and Materials; Sewers; Water Pipe, Lumber Grading and Classification; Iron and Steel; Pile and Trestle Work; Electric Light Station, etc.; Illustrative Examples of Complete Contracts and Specifications for Pumping Engines and Boilers; Bridges, Masonry Lock; Dam; Electric Railways, Generators; Motors, etc.; also New Specifications on Riveted Steel Water Pipe; Wooden Stave Water Pipe; Wrought-iron Chains; Railroad Concrete Work; Railway Road-bed; Levees; Steel Highway Bridges and Viaducts; Steel Railroad Bridges and Viaducts; Preservation of Railroad Cross-ties; Filter Gravel and Sand; Specifications and Contract for Architects' Services; and the General Specifications for Testing Hydraulic Cements, adopted by the U. S. Engineer Corps. Besides these, Two New Appendices are given on The

# Earthwork and its Cost

By H. P. GILLETTE

256 pages. Fully Illustrated.

8s. net.

## CONTENTS :

Introduction. The Art of Cost Estimating. Causes of Underestimates. Ambiguity of Specifications. Unfairness of Specifications. Earth Shrinkage. Swelling of Earth, Shrinkage of Earth. Earth Classification : Kinds of Earth, Test-pits. Cost of Loosening and Shovelling : Cost of Ploughing, Cost of Picking, Cost of Shovelling. Cost of Dumping, Spreading, Rolling, etc. : Cost of Dumping, Cost of Spreading, Cost of Ramming and Rolling. Cost of Sprinkling, Cost of Trimming. Cost by Wheelbarrows and Carts : Cost by Wheelbarrows, Cost by Dump Carts, Rules for Estimating Cost. Cost by Wagons : Sizes of Wagons, Speed and Power of Horses, Dishonest Teamsters, Cost of a Railroad Embankment, Cost of Cellar Excavation. Cost of Dykes, Rules for Estimating Cost. Cost by Buck and Drag Scrapers : Two Examples of Cost by Buck Scrapers, Three Examples of Cost by Drag Scrapers, Errors of Trautwine's Tables, Rule for Estimating Cost. Cost by Wheel Scrapers : Sizes of Wheelers, Errors of Trautwine's Tables, Four Examples of Cost, Wheelers for Loading Wagons, Three Rules for Estimating Cost. Cost by the Elevating Grader : Uses and Limitations of the Grader Cost of Wagon Loading on the Chicago Canal, Rule for Estimating Cost. Cost by Steam Shovels : Output of each of Sixty Shovels on the Chicago Canal, Force required and Cost, Output and Costs on Railroad Work, Cost of Moving Shovels, Rule for Estimating Cost. Cost by Cars : Tractional Resistance of Dump Cars, Portable Trestles for Cars, Running Cars over Ice, Trautwine's Errors in Estimating Cost, Cost of Laying Light Track, Cost of "Spotting" Cars and Hauling with "Dummy," Unloading Flat Cars by Plough, Hauling Dump Cars with Horses, Rule for Cost of Hauling. How to Handle a Steam Shovel Plant : Types of Shovel, Operation of Steam Shovels, Methods of Widening Railway Cuts, Cutting Down Grades, Handling Shovel Plants on Railway Construction, Same on Canal Work, Incline Conveyors Loaded with Shovel, Incline and Tipple Output. Summary and Table of Costs : Summary, Table of Costs, Contract Prices. Cost of Trenching and Pipe Laying : Cost of Trenching for Water Pipes and Pipe Laying—Six Examples, Cost of Trenching and Sheet-piling for Sewer Work—Six Examples, Cost with Trench Machines, Cost with Cableway. The Cost of Hydraulic Excavation : Amount of Water Required, Cost of Filling R. R. Trestles by Sluicing, Cost of Dam Filling, Cost of Placer Gravel Mining. Cost of Dredging, Types of Dredges, Cost by Dipper Dredge, Cost by Grapple Dredge, Cost by Bucket Elevator Dredge, Cost by Hydraulic Dredge, Contract Prices of Dredging. Miscellaneous Cost Data : Post Holes. Dredging with Drag Scraper, Cost by Power Scraper, Coasting Conveyor, Cost by Derricks, Wheelbarrows Loading Flat Cars, Cost of Plank Roads, Cost of Grading Wagon Roads, Frozen Earth, Belt Conveyors, Cost of Puddle, Cost of Grubbing and Clearing, Cost of Excavation N. Y. Rapid Transit Subway, Cost of Loading Wagons with Steam Shovel, Cost of Loading Cars with a Cableway. Earth and Earth Structures : Voids and Weights of Earth, Natural Slopes, Friction of Earth, Author's Formulas for Earth Pressure, Slips and Subsides, Embankment Construction, Effect of Freezing. Appendices—Rapid Field and Office Survey Work : The Author's Automatic Level-Rod,

# The Elements of Water Supply Engineering

By E. SHERMAN GOULD

8s. net.

## CONTENTS :

Flow through a Short Horizontal Pipe. Effect on Velocity of Increased Length. Frictional Head. Hydraulic Grade Line. Hydrostatic and Hydraulic Pressures, Piezometric Tubes. Results of Raising a Pipe Line above the Hydraulic Grade Line. Why the Water ceases to Rise in the Upper Stories of the Houses of a Town when the Consumption is Increased. Influence of Inside Surface of Pipes upon Velocity of Flow. Darcy's Coefficients. Fundamental Equations. Length of a Pipe Line usually determined by its Horizontal Projection. Numerical Examples of Simple and Compound Systems. Calculations are the same for Pipes laid Horizontally or on a Slope. Qualification of this Statement. Pipe of Uniform Diameter Equivalent to Compound System. General Formula. Numerical Example. Use of Logarithms. Numerical Example of Branch Pipe. Simplified Method. Numerical Examples. Relative Discharges through Branches Variously Placed. Discharges Determined by Plotting. Caution Regarding Results Obtained by Calculation. Numerical Examples. Numerical Example of a System of Pipes for the Supply of a Town. Establishment of Additional Formulæ for Facilitating such Calculations. Determination of Diameters. Pumping and Reservoirs. Caution Regarding Calculated Results. Useful Approximate Formulæ. Table of 5th Powers. Preponderating Influence of Diameter over Grade Illustrated by Example. Use of Formula 14 Illustrated by Numerical Example of Compound System combined with Branches. Comparison of Results. Rough and Smooth Pipes. Pipes Communicating with Three Reservoirs. Numerical Examples under Varying Conditions. Loss of Head from other cause than Friction. Velocity, Entrance and Exit Head. Numerical Examples and General Formula. Downward Discharge through a Vertical Pipe. Other Minor Losses of Head. Abrupt Changes of Diameter. Partially Opened Valve. Branches and Bends. Centrifugal Force. Small Importance of all Losses of Head except Frictional in the case of Long Pipes. All such Covered by "Even Inches" in the Diameter. Notes on Pipe-laying. Weight of Cast-iron Pipes. Various Useful Formulæ. Notes on Water Supply Engineering: Quality of Water, Quantity of Water, Dams, Calculation of; Construction of. Reference to other Publications. Flow of Water through Masonry Conduits. Some Details of Tunnel and Aqueduct Construction. Filtration of Public Water Supplies. Pumping Engines and Duty Trials. Arches and Abutments. Hydraulic Tables. Index.

---

## Tables of Squares

By JOHN L. HALL

Leather.

8s. net

# Méchanics—Problems for Engineering Students

By PROFESSOR F. B. SANBORN

Fully Illustrated.

6s. net.

## CONTENTS :

I. WORK (Problems 1-172).—Foot-Pounds, Raising Weights, overcoming Resistances of Railroad Trains, Machine Punch, Construction of Wells and Chimneys, Operation of Pumping Engines. Force and Distance or Foot-Pounds Required in Cases of Pile-Driver, Horse Differential Pulley, Tackle, Tram Car. Horse-Power: Required to Windmills, Planing Machines, Gas Engine, Locomotive, Steam Engines—Simple, Compound, Triple, Slow-Speed, High-Speed Engines. Horse-power from Indicator Cards, Required by Electric Lamps, Driving Belts, Steam Crane, Coal Towers, Pumping Engine, Canals, Streams, Turbines, Water Wheels. Efficiency, Force or Distance Required in Cases of Fire Pumps, Mines, Bicycles, Shafts, Railroad Trains, Air Brakes, the Tide, Electric Motors, Freight Cars, Ships. Energy: Foot-pounds, Horse-power. Velocity: Ram, Hoisting Engine, Blacksmith, Electric Car, Bullet, Cannon, Nail, Pendulum. Energy resulting from Motion of Flywheel and Energy required by Jack-screw. II. FORCE (Problems 172-405).—Forces acting at a Point: Canal Boat being Towed, Rods, Struts, Beams, Derrick, Cranes set as in Action; Balloon held by Rope, Hammock Supported; Wagon, Trucks, Picture Supported: Forces in Frames of Car Dumper, Tripod, Shear Legs, Dipper Dredge, also in Triangle, Square, Sailing Vessel, Rudder, Foot-bridge, Roof-truss. Moments for Parallel Forces: Beams Balanced, Pressure on Supports, Propelling Force of Oars, Raising Anchor Force at Capstan, Bridge Loaded Pressure on Abutments, Lifting one end of Shaft, Boat Hoisted on Davit, Forces acting on Triangle, Square, Supports of Loaded Table and Floor. Couples: Brake Wheel, Forces acting on Square. Stresses: Beam leaning against Wall, Post in Truss, Rope Pull on Chimney, Connecting Rod of Engines, Trap-door held up by Chain. Centre of Gravity: Rods with Loads, Metal Square and Triangle, Circular Disk with Circular Hole punched out, Box with Cover open, Rectangular Plane with Weight on one end, Irregular Shapes, Solid Cylinder in Hollow Cylinder, Cone on top of Hemisphere. Friction: Weight moved on Level Table, Stone on Ground, Block on Inclined Plane, Gun dragged up Hill, Cone sliding on Inclined Plane; Friction of Planing Machine, Locomotives, Trains, Ladder against Wall, Bolt Thread, Rope around a Post; Belts, Pulleys and Water-wheels in action; Heat Generated in Axles and Bearings. III. MOTION (Problems 405-500).—Uniform Acceleration: Railroad Train, Ice Boat, Stone Falling and Depth of Well, Balloon Ascending, Cable Car Running Wild. Relative Velocity: Aim in Front of Deer, Rowing across River, Bullet Hitting Balloon Ascending, Rain on Passenger Train, Wind on Steamer, Two Passing Railroad Trains. Distance, Velocity, Friction, Angle of Inclination: Train Stopped, Steamer Approaching Dock, Cannon Recoil, Locomotive Increasing Speed, Body moved on Table, Box-machine, Motion of Table, Barrel of Flour on Elevator, Man's Weight on Elevator, Cage Drawn up Coal Shaft. Projectiles: Inclination for Bullet to strike Given Point, Motion down Plane, Stone dropped from Train, Thrown from Tower, Projectile from Hill, From Bay over Fortification Wall. Pendulums: Simple, Conical, Ball in Passenger Car. Impact: Water suddenly

# The Railway Transition Spiral

By PROFESSOR A. N. TALBOT

6s. net.

## CONTENTS :

Nomenclature. Theory. Summary of Principles. Description and Use of the Tables. Choice of  $a$  and the Length of Spiral. Location of P. S., P. C. C. and P. C. Laying Out the Spiral by Co-Ordinates. Location by Transit and Deflection Angles. Application to Existing Curves. Compound Curves. Miscellaneous Problems. Uniform Chord Length Method, Street Railway Spirals. Conclusion : Explanation of Tables, which include Transition Spirals, Factors for Ordinates, Unit Spiral Deflection Angles, Co-efficients for Deflection Angles, Street Railway Spirals, Offsets for Spirals.

---

# Tables for Obtaining Horizontal Distances and Differences of Level from Stadia Readings

NOBLE & CASGRAIN

4s. net.

Giving distances and heights for all stadia readings from 1 to 9 and for every minute of altitude.

---

# Technic of Mechanical Drafting

By G. W. REINHARDT.

Fully Illustrated.

4s. net.

Giving general instructions on the care and handling of Draughtsmen's Instruments and Materials, and containing chapters on Outlining, Outline

ARCHIBALD CONSTABLE & CO. LTD.

---

# Surveying Manual

A Manual of Field and Office Methods

By W. D. PENEK and M. S. KETCHUM

8s. net.

## CONTENTS:

General Instructions. The Chain and Tape. The Compass. The Level. The Transit. Topographic Surveying. Land Surveying. Railroad Surveying. Errors of Surveying. Methods of Computing. Freehand Lettering.

---

# Office-Copy Booklet

By the same Authors.

4s. net per dozen.

Published primarily for use in connexion with *The Surveying Manual*, but very useful in drainage, topographical surveys, etc.

---

# Text Book on Plain Lettering

By H. S. JACOBY.

12s. net.

Containing chapters on construction and spacing of letters, titles, selection of styles, mechanical aids and 48 plates illustrating construction of letters, spacing titles, proportioning, scales, meridians, borders, Coast Survey rules, maps and titles, Geological Survey standards and maps, Mississippi River Commission title and maps, Corps of Engineers, specimens of type and explanatory notes.

---

# Earth Dams

By BURR BASSELL

Fully Illustrated.

4s. net.

## CONTENTS:

Determining the Site. Preliminary Studies and Investigations. Outline Study

# The Design of Steel Mill Buildings

And the Calculation of Stresses in Framed Structures

By M. S. KETCHUM

380 pages.

Fully Illustrated.

16s. net.

## CONTENTS:

Introduction. Loads. Dead Loads. Snow Loads. Wind Loads. Miscellaneous Loads. Stresses. Graphic Statics. Stresses in Framed Structures. Stresses in Simple Roof Trusses. Simple Beams. Moving Loads on Beam. Stresses in Bridge Trusses. Stresses in a Transverse Bent. Stresses in Portals. Stresses in Three-hinged Arch. Stresses in Two-hinged Arch. Combined and Eccentric Stresses. Design of Mill Buildings. General Design. Framework. Corrugated Steel. Roof Coverings. Side Walls and Masonry Walls. Foundations. Floors. Windows and Skylights. Ventilators. Doors. Shop Drawings and Rules. Paints and Painting. Estimate of Weight and Cost. Miscellaneous Structures. Appendix I. Specifications for Steel Frame Mill Buildings.

Complete Table of Contents on Application.

---

# Topographical Record and Sketch Book

For use with Transit and Stadia

By D. L. TURNER

3s. 6d. net.

Containing explanatory introduction, giving the Author's suggestion as to the best method for using the book. Following this are eighty pages ruled in blue, the left-hand pages containing columns for field notes and the right-hand pages being ruled with radial lines and concentric circles, on which to sketch topography; also tables giving Horizontal Distances and Differences of Elevation for Stadia.

# Railway Track and Track Work

By E. E. R. TRATMAN

742 pages. 226 Illustrations.

12s. 6d. net.

Revised and enlarged edition, containing additional chapters on "Signals and Interlocking" and "Street Railway Track."

## CONTENTS :

Track. Introduction. Railroad Construction. Ballast. Ties and Tie-Plates. Rails, Rail Fastenings and Rail Joints. Switches, Frogs and Switchboards. Fences and Cattle Guards. Bridge Floors and Grade Crossings. Track Signs. Tanks and other Track Accessories. Sidings, Yards and Terminals. Track Tools and Supplies. Signals and Interlocking. Street Railway Track. Track Work. Organization of Maintenance-of-Way Department. Tracklaying and Ballasting. Drainage and Ditching. Track Work for Maintenance. Gauge, Grades and Curves. Track Inspection and the Premium System. Switch Work and Turnouts. Bridge Work and Telegraph Work. Permanent Improvements and Work Trains. Handling and Clearing Snow. Wrecking Trains and Operations. Records, Reports and Accounts. Table of Standard Track Construction on Fifty Railways. Table of Train Speeds and Distances Run.

---

# Cleaning and Sewerage of Cities

By PROFESSOR R. BAUMEISTER

290 pages. Fully Illustrated.

8s. net.

## CONTENTS :

Introductory. Sewerage : General Principles, Carrying of Waste Water Rain Water, Character of Waste and Rain Water and Sewage, Shape and Material of Sewers, Calculation of Sewers, Special Details of Construction, Catch-Basins, Flushing, Ventilation, Effects of Subsoil Water, The Separate System, Cost of Work. The Purification of Sewage : Pollution of Rivers Chemical Precipitation, Precipitating Tanks, Results and Cost of Purification, Aeration, Filtration, Irrigation, Results and Cost of Irrigation. General Municipal and Domestic Sanitation : The Sanitary Problem, General Principles, The Use of Gutters, Quantity and Character of Refuse, Implements for Street Cleaning, Removal of the Rubbish, Miscellaneous Regulations Concerning Streets, Quantity and Characteristics of Excrement, Removal of Excrement, Removal Through Pneumatic Tubes, Financial Consideration, Special Treatment of Excremental Matter, Sepa-

# Field Practice of Railway Location

By WILLARD BEAHAN

270 pages. Fully Illustrated.

12s. net.

## CONTENTS :

The Character of the Road : Types of Systems, Effect of Monopoly, the Charter, New Main Lines, Traffic, Cost of Construction, Extensions of Main Lines, Cut-offs, Branch Lines, Summary. Reconnaissance for Route : Instruments, Field Glass, Compass, Barometer, Level, Distances by Timing, the Method of Preliminaries, the Personal Reconnaissance Method, the Stadia Method, the Reconnaissance, Errors of Observation, Topography as Affecting Location, Valley v. Ridge Location, Crossing Drainage at Right Angles, Passes, Crossing Drainage Diagonally, Canons, Developing Loops, Tunnelling, Switchbacks, Inclines, Field Notes, Report of Engineer. Organization, Subsistence and Equipment of Parties : Chief of Party, Topographer, Transitman, Draftsman, Levelman, Head Chainman, Rodman, Cook, Teamster, Axmen, Stakemen, Flagman, Extra Men and Horses, Equipment, Transit, Level, Rods and Chains, Sundries, Tents, Stoves, Quarters, Cook's Outfit, Stock Tent, Food Supplies, Fuel, Army Rations, Pack Train, Subsistence Lists, Equipment for Locating Party, Tool Box, Medicines. The Preliminary Survey : No Preliminary Needed, One Preliminary Needed, Two or More Preliminaries Needed, Reconnaissance for Line, Transit Work, Chaining, Station Stakes, Hubs, Transitman's Notes, Topography, Levelling, Bench Marks, Drafting the Profile, Openings. Geology in its Relations to Topography : Rocks the Material of Topography, Origin of the Different Kinds of Rocks, the Internal Changes Affecting Rocks, Structural Changes in Beds of Rocks, Topographic Relief, Constructive Agencies, Destructive Agencies, Atmospheric Agencies. The Locomotive : Types, Grate Area, Boiler, Tractive Power, Tripod Support, Equalizing Bars, Conclusions. Part I. Train Resistances : Journal Friction, Rolling Friction, Velocity Resistance, Starting Resistance, Grade and Curve Resistances, Rise and Fall, Virtual Profile, Vertical Curves, Curve Resistance, Equating for Curvature, Elevation of Outer Rail, Easement Curves, Cost of Construction and Capitalization, Right of Way, Cost of Grading, Masonry, Bridging, Bridge Spans, False Work, Capitalizing a Trestle, Minor Openings, Track, Buildings, Capitalization. Part II. The Located Line : Locating from One Preliminary, Curves, Topography, Platting, Vertical Curves, Location from Several Preliminaries, Cost of Transportation, Equating Grades, Equating Curvature, Virtual Profile, Maximum Grades, Assistant Engines, Heavier Engines, Adapting Grades to Engines, Maximum Curvature, Final Consideration. Records and Cost of Surveys : Character of Records and Notes, Uses of Maps and Records, Reconnaissance Records, Preliminary Survey Records, Location

# City Roads and Pavements

Suited to Cities of Moderate Size

By W. P. JUDSON

*SECOND EDITION. REVISED AND ENLARGED.*

Fully Illustrated.

8s. net.

## CONTENTS :

Preparation of Streets for Pavements : Reduction of Width, Drainage, Subdrainage, Rollers, Rolling Dirt Roads, Wide Tires, Pressure of Traffic and of Structures. Ancient Pavements : Comparisons, Stone Wheel-Tracks, Competition with First Railway. Modern Pavements : Comparative Loads, Cost, Pavements for Steep Grades, Asphalt, Vitrified Brick, Creosoted Wood Block, Block Stone, Broken Stone, Bituminous Macadam, Crown of Pavements (Rosewater Formulæ of 1898 and 1902), Form of Crown (for Macadam), Falls of Horses on Different Pavements, Culverts (Kinds, Sizes, Cost), Curbs (Kinds, Sizes, Cost), Car-Track Construction. Concrete Base for Pavement : Need, Subgrade, Cement (Simple Outfit for Easy Tests, Fineness, Quickness, Soundness, Purity, Weight, Result), Manner of Use, Aggregates, Sand, Proportions and Mixing, Water, Machine-mixing, Spreading and Ramming, Monolith, Surface, Setting, Wetting, Freezing (Use of Brine, Limit of Cold), Cost, Portland, Natural, Extra Work, Table (36 Cities). Block-Stone Pavements : Defects, Merits, Cost, Extent. Wood Pavements : Old, Cedar Blocks, Modern, Australian, American (Kreodone-Creosote, Creo-Resinate Cost), Vitrified Brick Pavements : Modes, Extent, Objections, Production, Characteristics, Qualities, Tests, Examination in Use, Construction (Base, Sand-Cushion, Joint-Fillers, Expansion), on Steep Grades, Cost, Guarantee. American Sheet Asphalt, Artificial and Natural : Comparison, History, Artificial, Natural, Companies, Sources, American Artificial (Materials and Methods, Foundation, Binder, Wearing Surface, Rolling), Steep Grades, Crown, Railway Tracks, Cost, Guarantee, Causes of Failures, Block-Asphalt (Extent, Cost), Comparative preference, Asphalt and Brick. Bituminous Macadam, or Bitulithic Pavement : Characteristics, Details, Methods, Cost, Opinions. Broken Stone Roads : Extent, Rock for Roads, Tests of Rock, Telford and Macadam (Relative Costs), Binder (Mode of Use, Quality, Quantity), Maximum Grades, Construction, Subgrades of Various Kinds, Rock (Crushing, Screening), Base, Top, Thickness, Crowns Cost, Cautions, Maintenance, Methods of Repairs (Raveling, Rolling, Ruts, Cleaning, Cost), Resurfacing (Methods, Cost). Index.

---

## Tables of Logarithms

Of Lengths up to 50 feet, varying by  $\frac{1}{16}$  of an inch

By T. W. MARSHALL

ARCHIBALD CONSTABLE & CO. LTD.

---

# Laboratory Note Book

FOR CHEMICAL STUDENTS

By VIVIAN B. LEWES

Professor of Chemistry, Royal Naval College, and

J. S. S. BRAME

Demonstrator in Chemistry, Royal Naval College, and Assistant Examiner in Chemistry,  
Science and Art Department.

INTERLEAVED THROUGHOUT WITH WRITING PAPER.

Price 4s.

---

# Economics of Road Construction

By H. P. GILLETTE

4s. net.

CONTENTS:

Historical Review. Earth Roads and Earthwork. Profile of Cross Section of Road. Longitudinal Profile. Gutters and Drains. Embankments. Cost of Earthwork. Surfacing. Traction and Tractive Power. Location. Gravel Roads. Macadam Roads: What Holds Macadam Together. Quality of Stone. Quarrying. Dynamite. Crushing. Hauling. Spreading. Rolling. Sprinkling. Quality and Cost. Telford Roads. Summary and Conclusion.

---

# The Engineering News

(OF NEW YORK)

A Journal of Civil, Mechanical, Mining and  
Electrical Engineering.

Price Sixpence.

---

*Established 1874. Published Every Thursday.*

---

Annual Subscription, post free, mailed on the day of  
publication, 21s., payable in advance.

10 weeks' subscription, 4s. ; 6 months', 10s. 6d.

---

# Maxwell's Theory and Wireless Telegraphy

## PART I.

### MAXWELL'S THEORY AND HERTZIAN OSCILLATIONS

By H. POINCARÉ

Translated by K. VREELAND

## PART II.

### THE PRINCIPLES OF WIRELESS TELEGRAPHY

By K. VREELAND

#### CONTENTS:

**Part I. MAXWELL'S THEORY AND HERTZIAN OSCILLATIONS.**—Generalizations Regarding Electrical Phenomena. Maxwell's Theory. Electrical Oscillations before Hertz. Hertz's Oscillator. Methods of Observation. Propagation along a Wire. Measurement of Wave-Length and Multiple Resonance. Propagation in Air. Propagation in Dielectrics. Production of very rapid Oscillations. Imitation of Optical Phenomena. Synthesis of Light.

**Part II.—THE PRINCIPLES OF WIRELESS TELEGRAPHY.**—General Principles. Telegraphy by Hertzian Waves. The Grounded Oscillator. Propagation of Grounded Waves. The Receiving Apparatus. Selective Signalling.

---

\* \* \* *Prospectuses and all information sent post free on application.*

---

\* \* \* *Messrs. Archibald Constable & Co. hold stock of the well-known publications of the Engineering News Company of New York.*

---